

ATIS	HAT YAI Ground	Tower
128.8	121.9	118.1

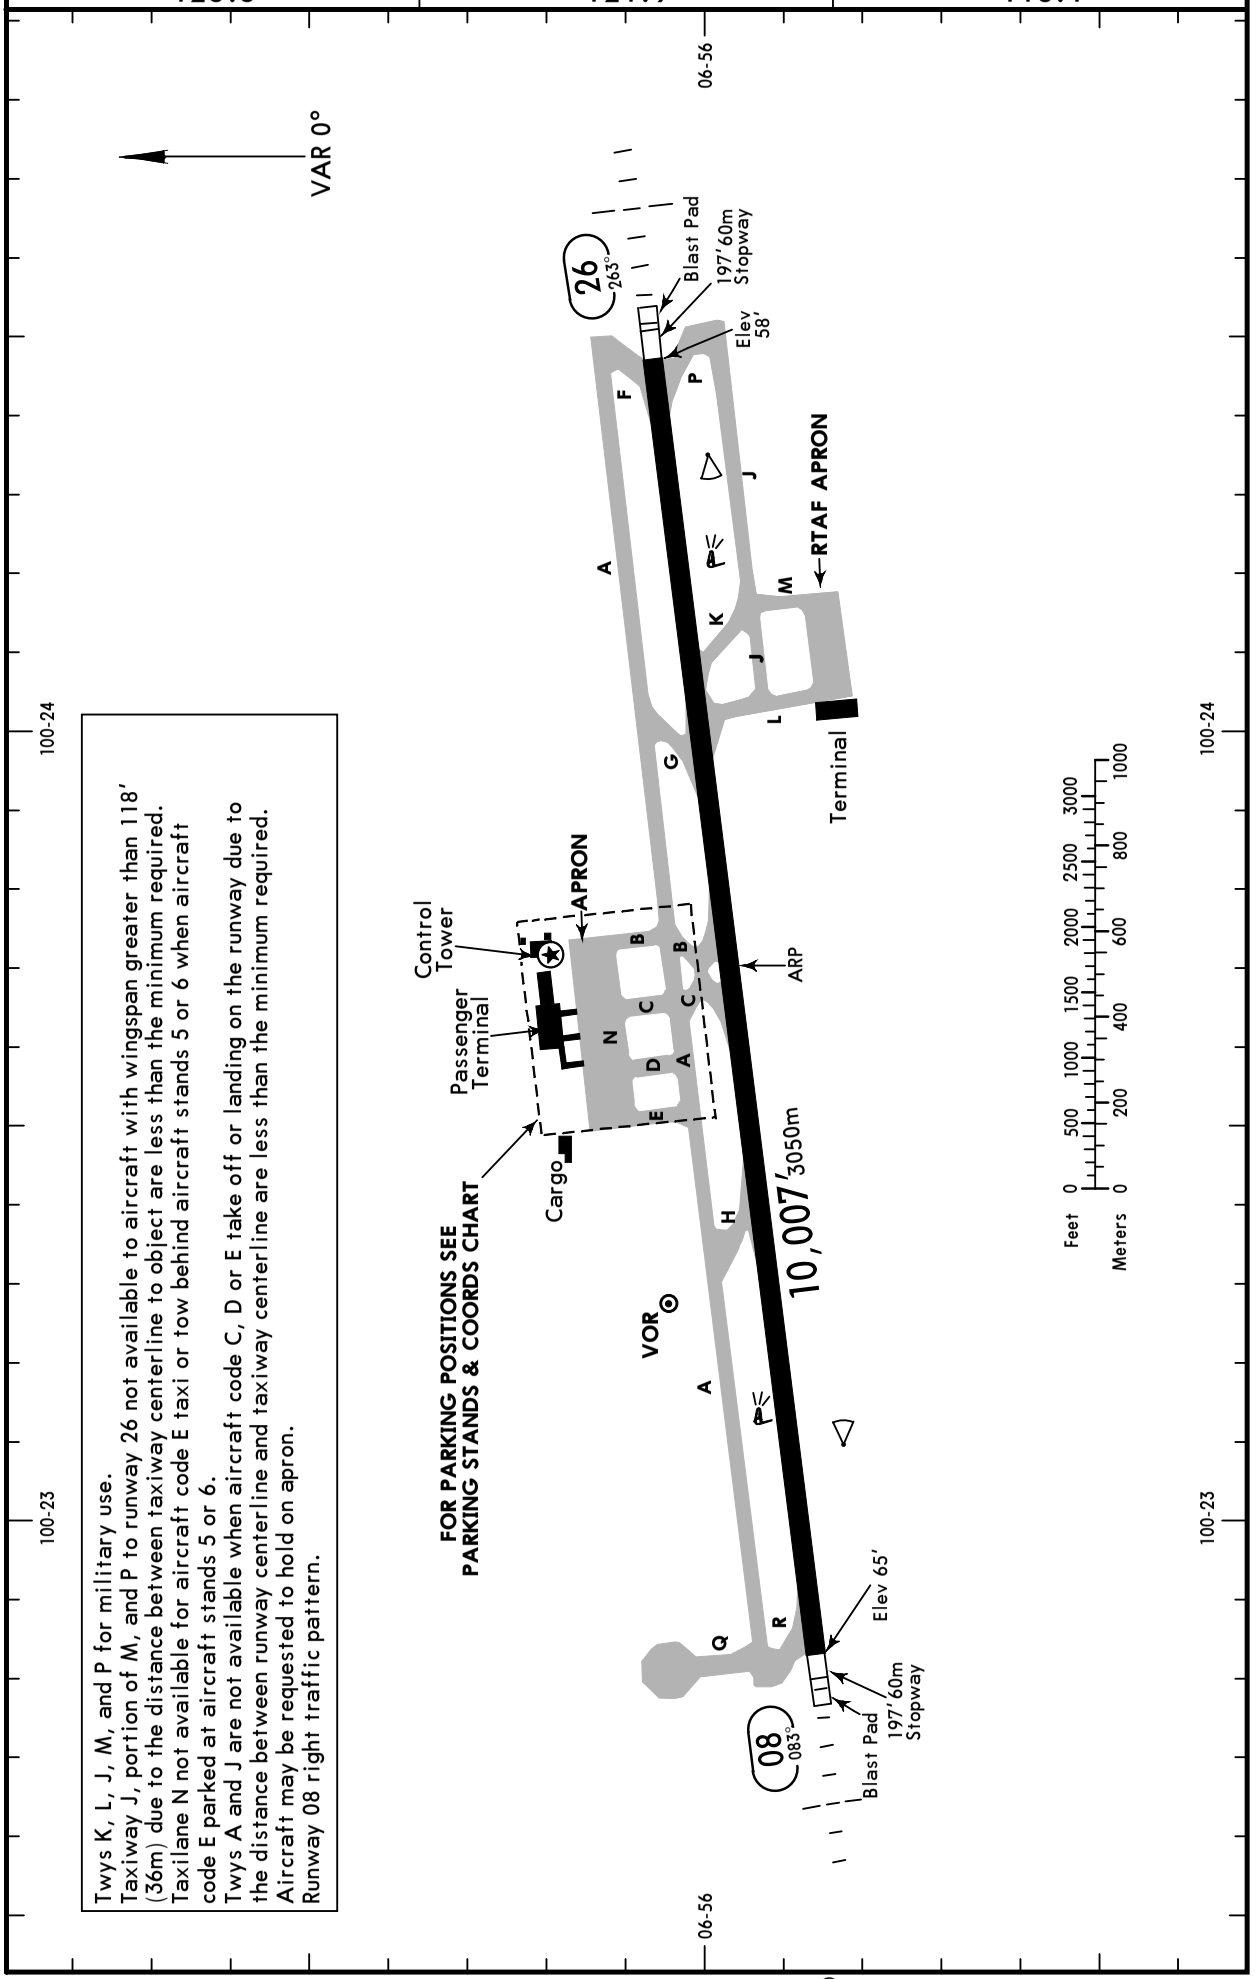

Twys K, L, J, M, and P for military use.
Taxiway J, portion of M, and P to runway 26 not available to aircraft with wingspan greater than 118′ (36m) due to the distance between taxiway centerline to object are less than the minimum required.
Taxilane N not available for aircraft code E taxi or tow behind aircraft stands 5 or 6 when aircraft code E parked at aircraft stands 5 or 6.
Twys A and J are not available when aircraft code C, D or E take off or landing on the runway due to the distance between runway centerline and taxiway centerline are less than the minimum required.
Aircraft may be requested to hold on apron.
Runway 08 right traffic pattern.

© JEPPESEN, 2003, 2025. ALL RIGHTS RESERVED.

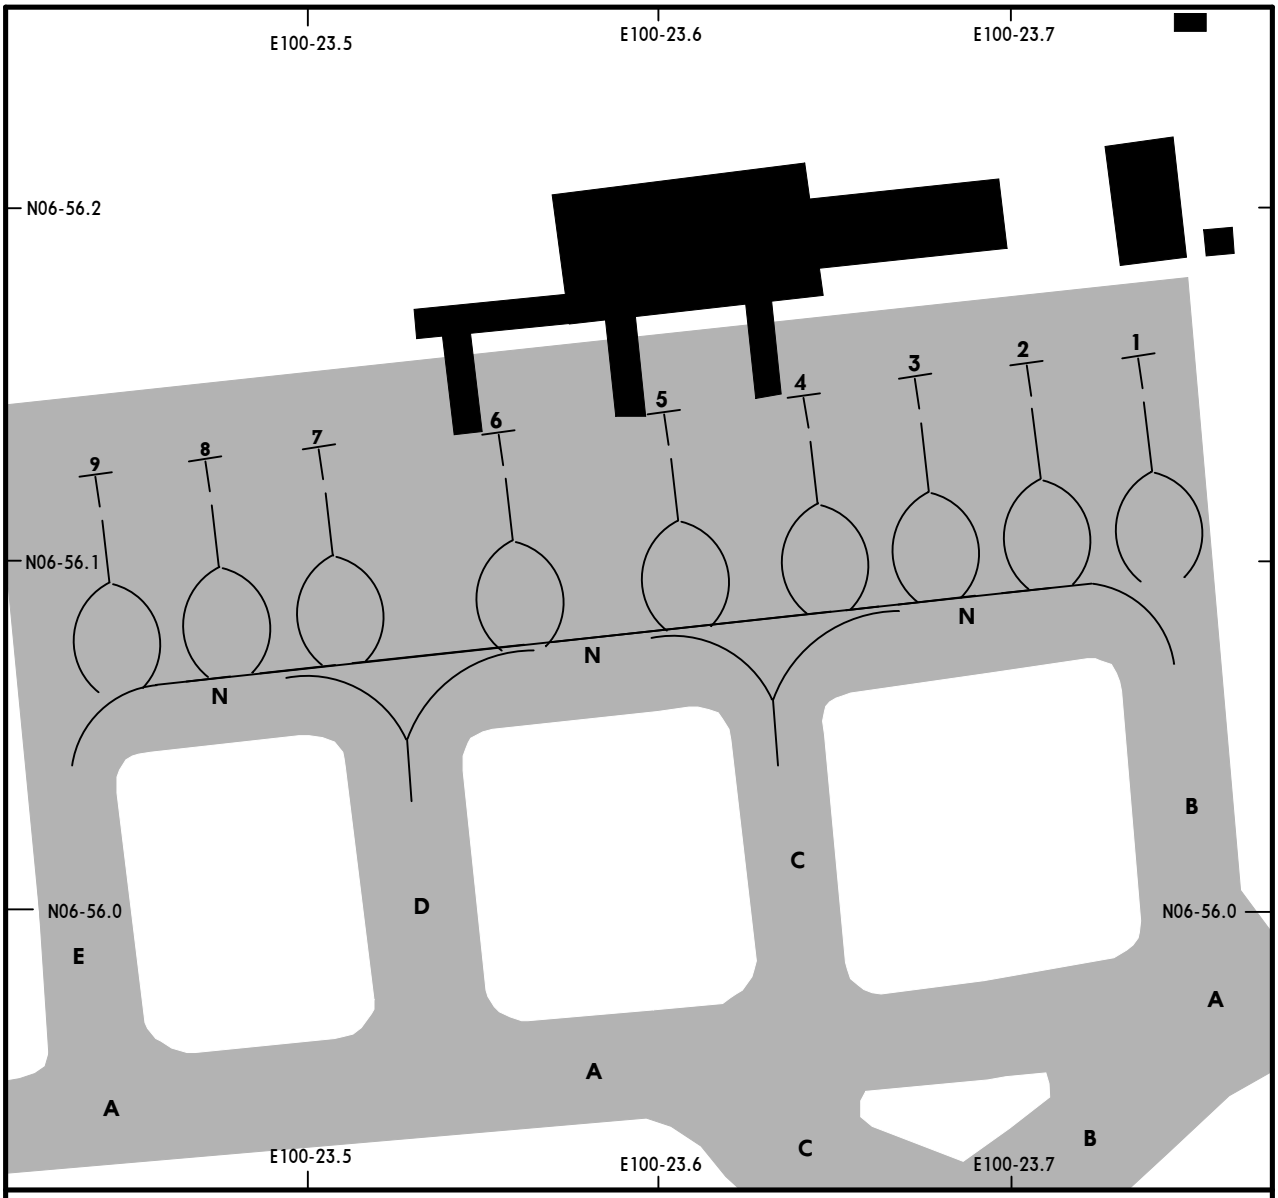

PARKING STAND COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
1, 2	N06 56.2 E100 23.7		
3, 4	N06 56.1 E100 23.7		
5, 6	N06 56.1 E100 23.6		
7 thru 9	N06 56.1 E100 23.5		


Parking stands 1,9 for aircraft up to code C max wingspan 95′ (29m).
Parking stands 2, 3, 4, 7, 8 for aircraft up to code C max wingspan 118′ (36m).
Parking stand 5 for aircraft up to max wingspan 213′ (65m).
Parking stand 6 for aircraft up to max wingspan 210′ (64m).

CHANGES: Chart reindexed.

© JEPPESEN, 2003, 2022. ALL RIGHTS RESERVED.

Apt Elev	
90	Trans alt: 11000 1. OMNIDIRECTIONAL departures during take-off and initial climb-out are permitted during the day and night. ATC clearance to execute an OMNIDIRECTIONAL depature may be issued upon request of the pilot or upon initiative of the ATC and accepted by the pilot. 2. The pilot shall be maintaining a minimum climb gradient up to specific altitude as published shown as below. 3. The pilot shall be responsible for adherence to such obtained ATC clearance. 4. The pilot prior to take-off shall agree to execute this procedure. 5. The ATC clearance shall be readback.

OMNI DEPARTURE
[OMNI]
(ALL RWYS)

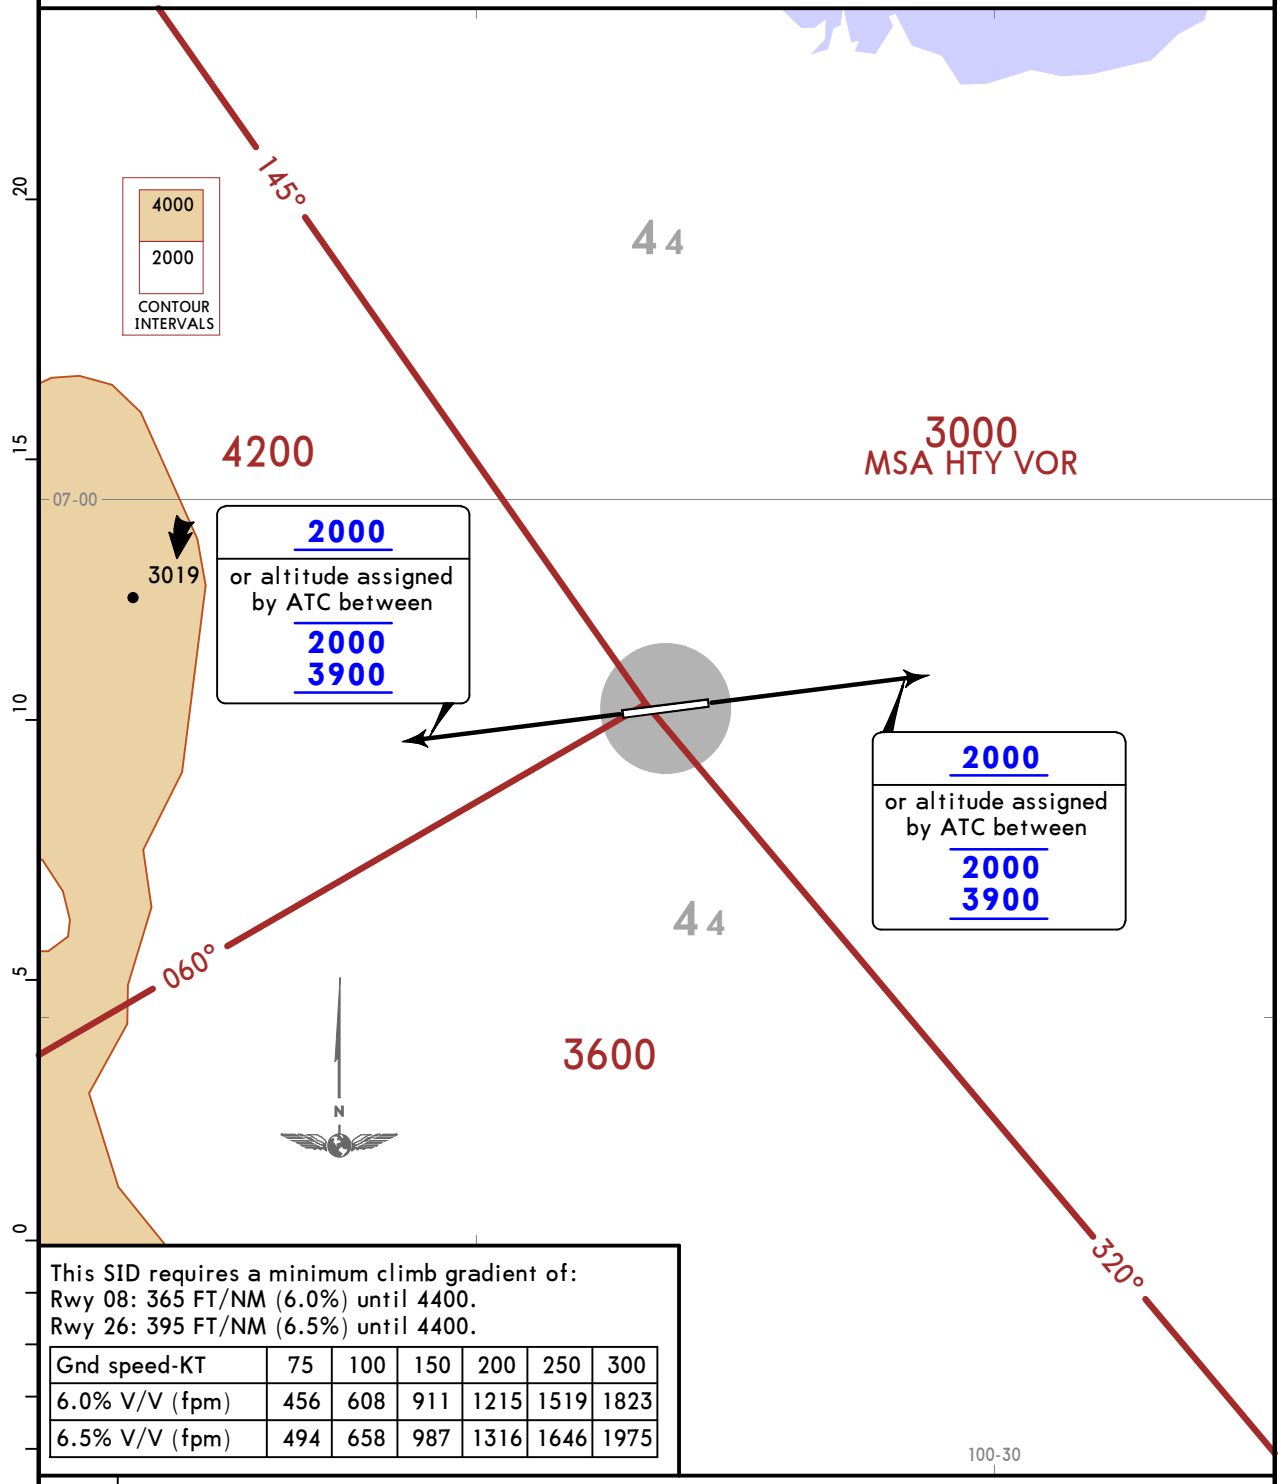


This SID requires a minimum climb gradient of:
Rwy 08: 365 FT/NM (6.0%) until 4400.
Rwy 26: 395 FT/NM (6.5%) until 4400.

Gnd speed-KT	75	100	150	200	250	300
6.0% V/V (fpm)	456	608	911	1215	1519	1823
6.5% V/V (fpm)	494	658	987	1316	1646	1975

RWY	INITIAL CLIMB
08	No turn before DER. After departure climb stright ahead until 2000 (or altitude assigned by ATC between 2000 - 3900), then comply with ATC clearance issued (or as directed by ATC).
26	No turn before DER. After departure climb stright ahead until 2000 (or altitude assigned by ATC between 2000 - 3900), then comply with ATC clearance issued (or as directed by ATC).

CHANGES: New procedure at this airport.

© JEPPESEN, 2024. ALL RIGHTS RESERVED.

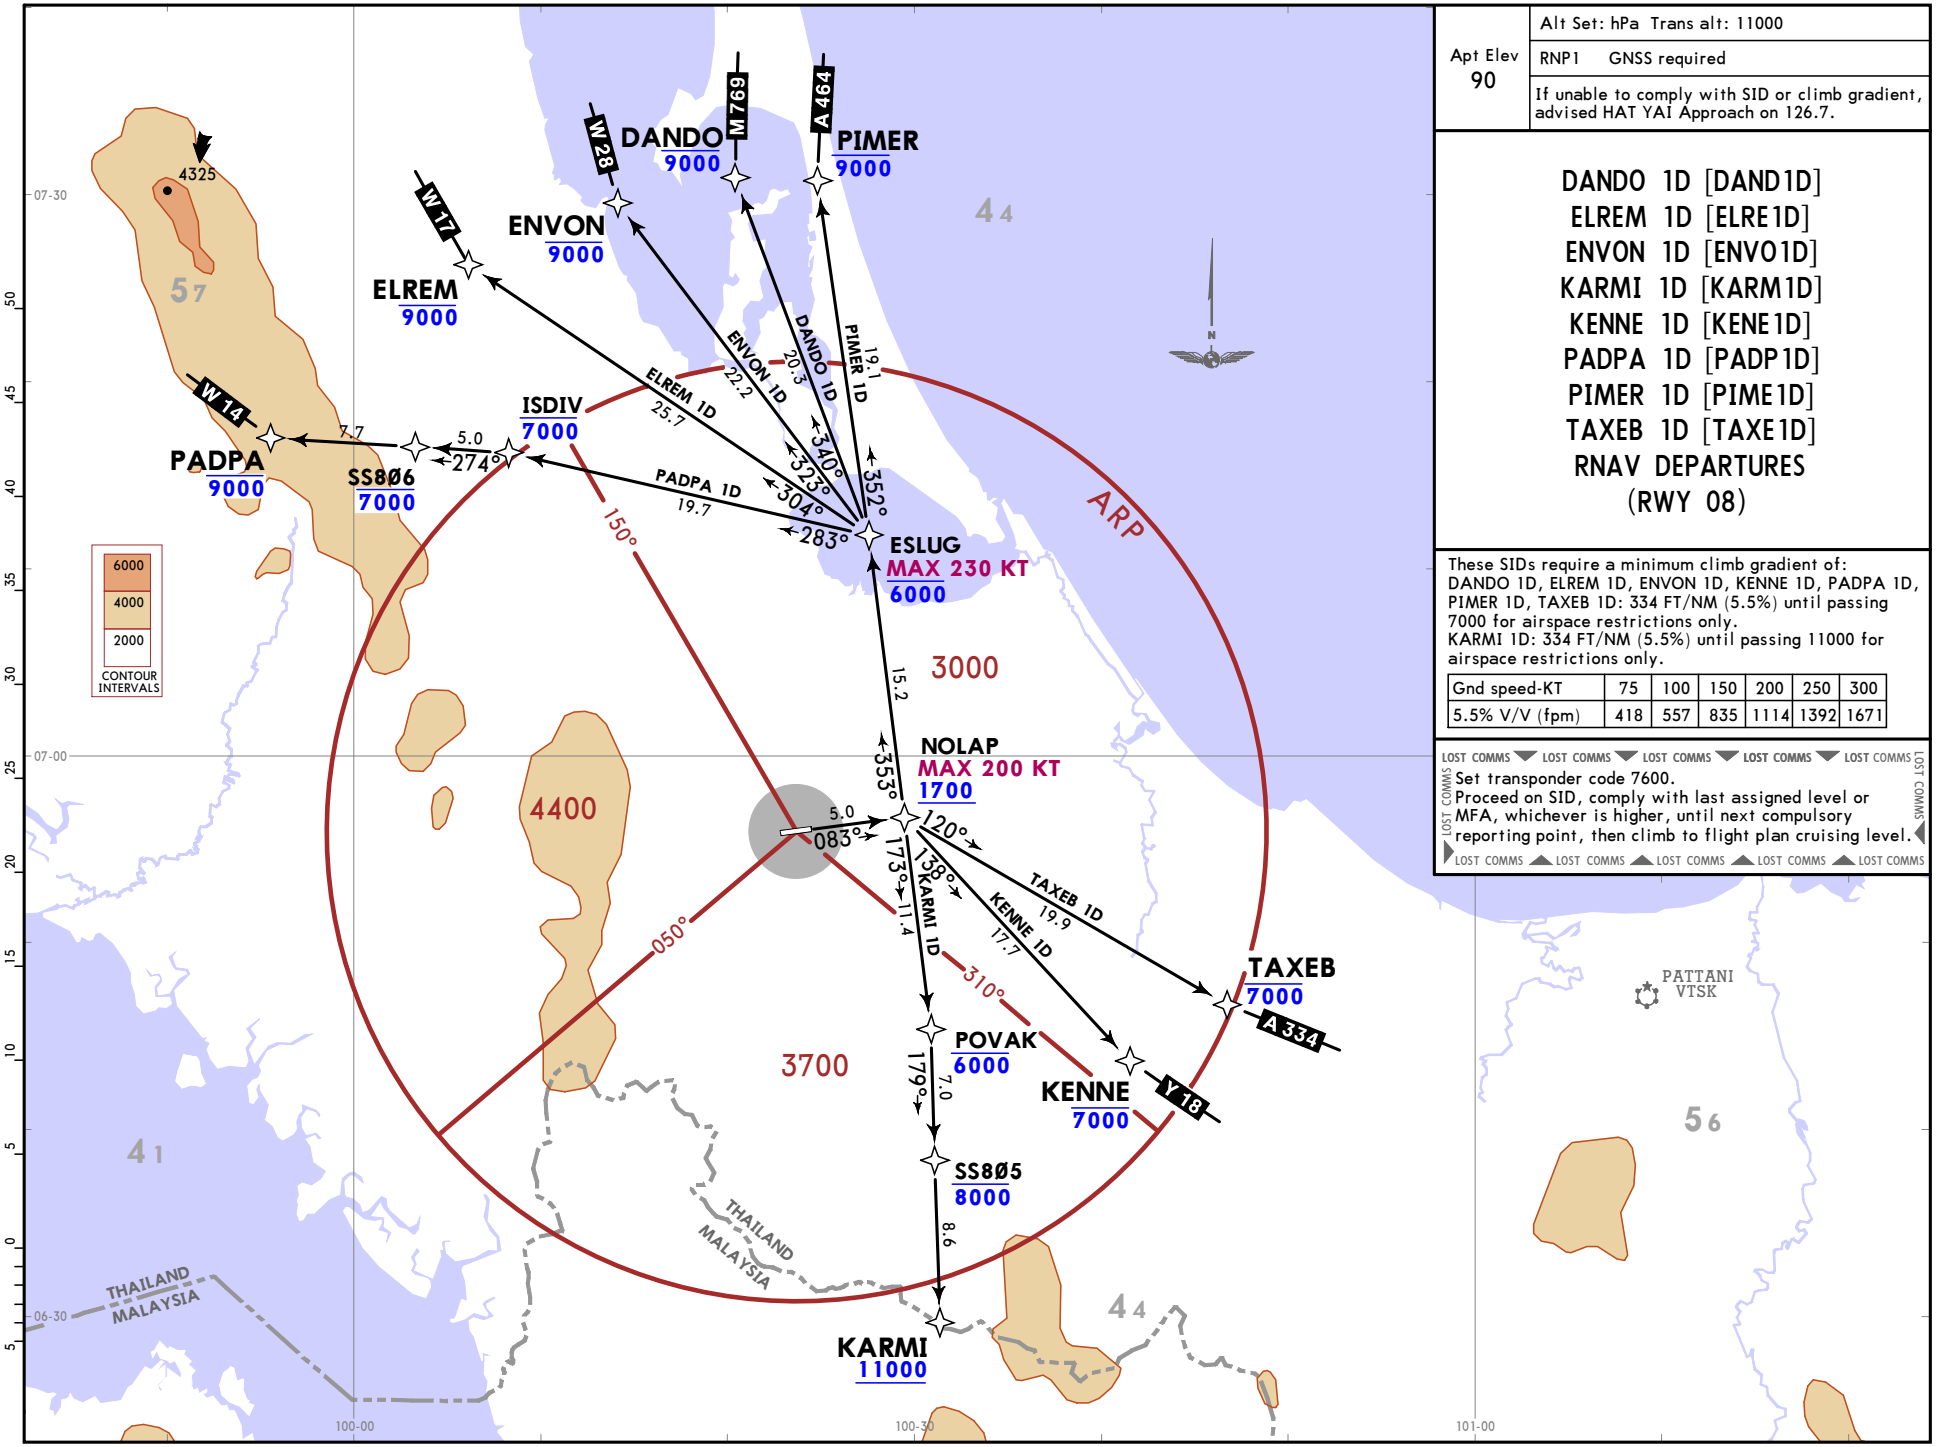

Apt Elev	Alt Set: hPa Trans alt: 11000
90	RNP1 GNSS required
	If unable to comply with SID or climb gradient, advised HAT YAI Approach on 126.7.

DANDO 1D [DAND1D]
ELREM 1D [ELRE1D]
ENVON 1D [ENVO1D]
KARMI 1D [KARM1D]
KENNE 1D [KENE1D]
PADPA 1D [PADP1D]
PIMER 1D [PIME1D]
TAXEB 1D [TAXE1D]
RNAV DEPARTURES
(RWY 08)


These SIDs require a minimum climb gradient of:
DANDO 1D, ELREM 1D, ENVON 1D, KENNE 1D, PADPA 1D, PIMER 1D, TAXEB 1D: 334 FT/NM (5.5%) until passing 7000 for airspace restrictions only.
KARMI 1D: 334 FT/NM (5.5%) until passing 11000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V (fpm)	418	557	835	1114	1392	1671

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

CHANGES: Bearings from POVAK to SS8Ø5 & from SS8Ø5 to KARMI.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

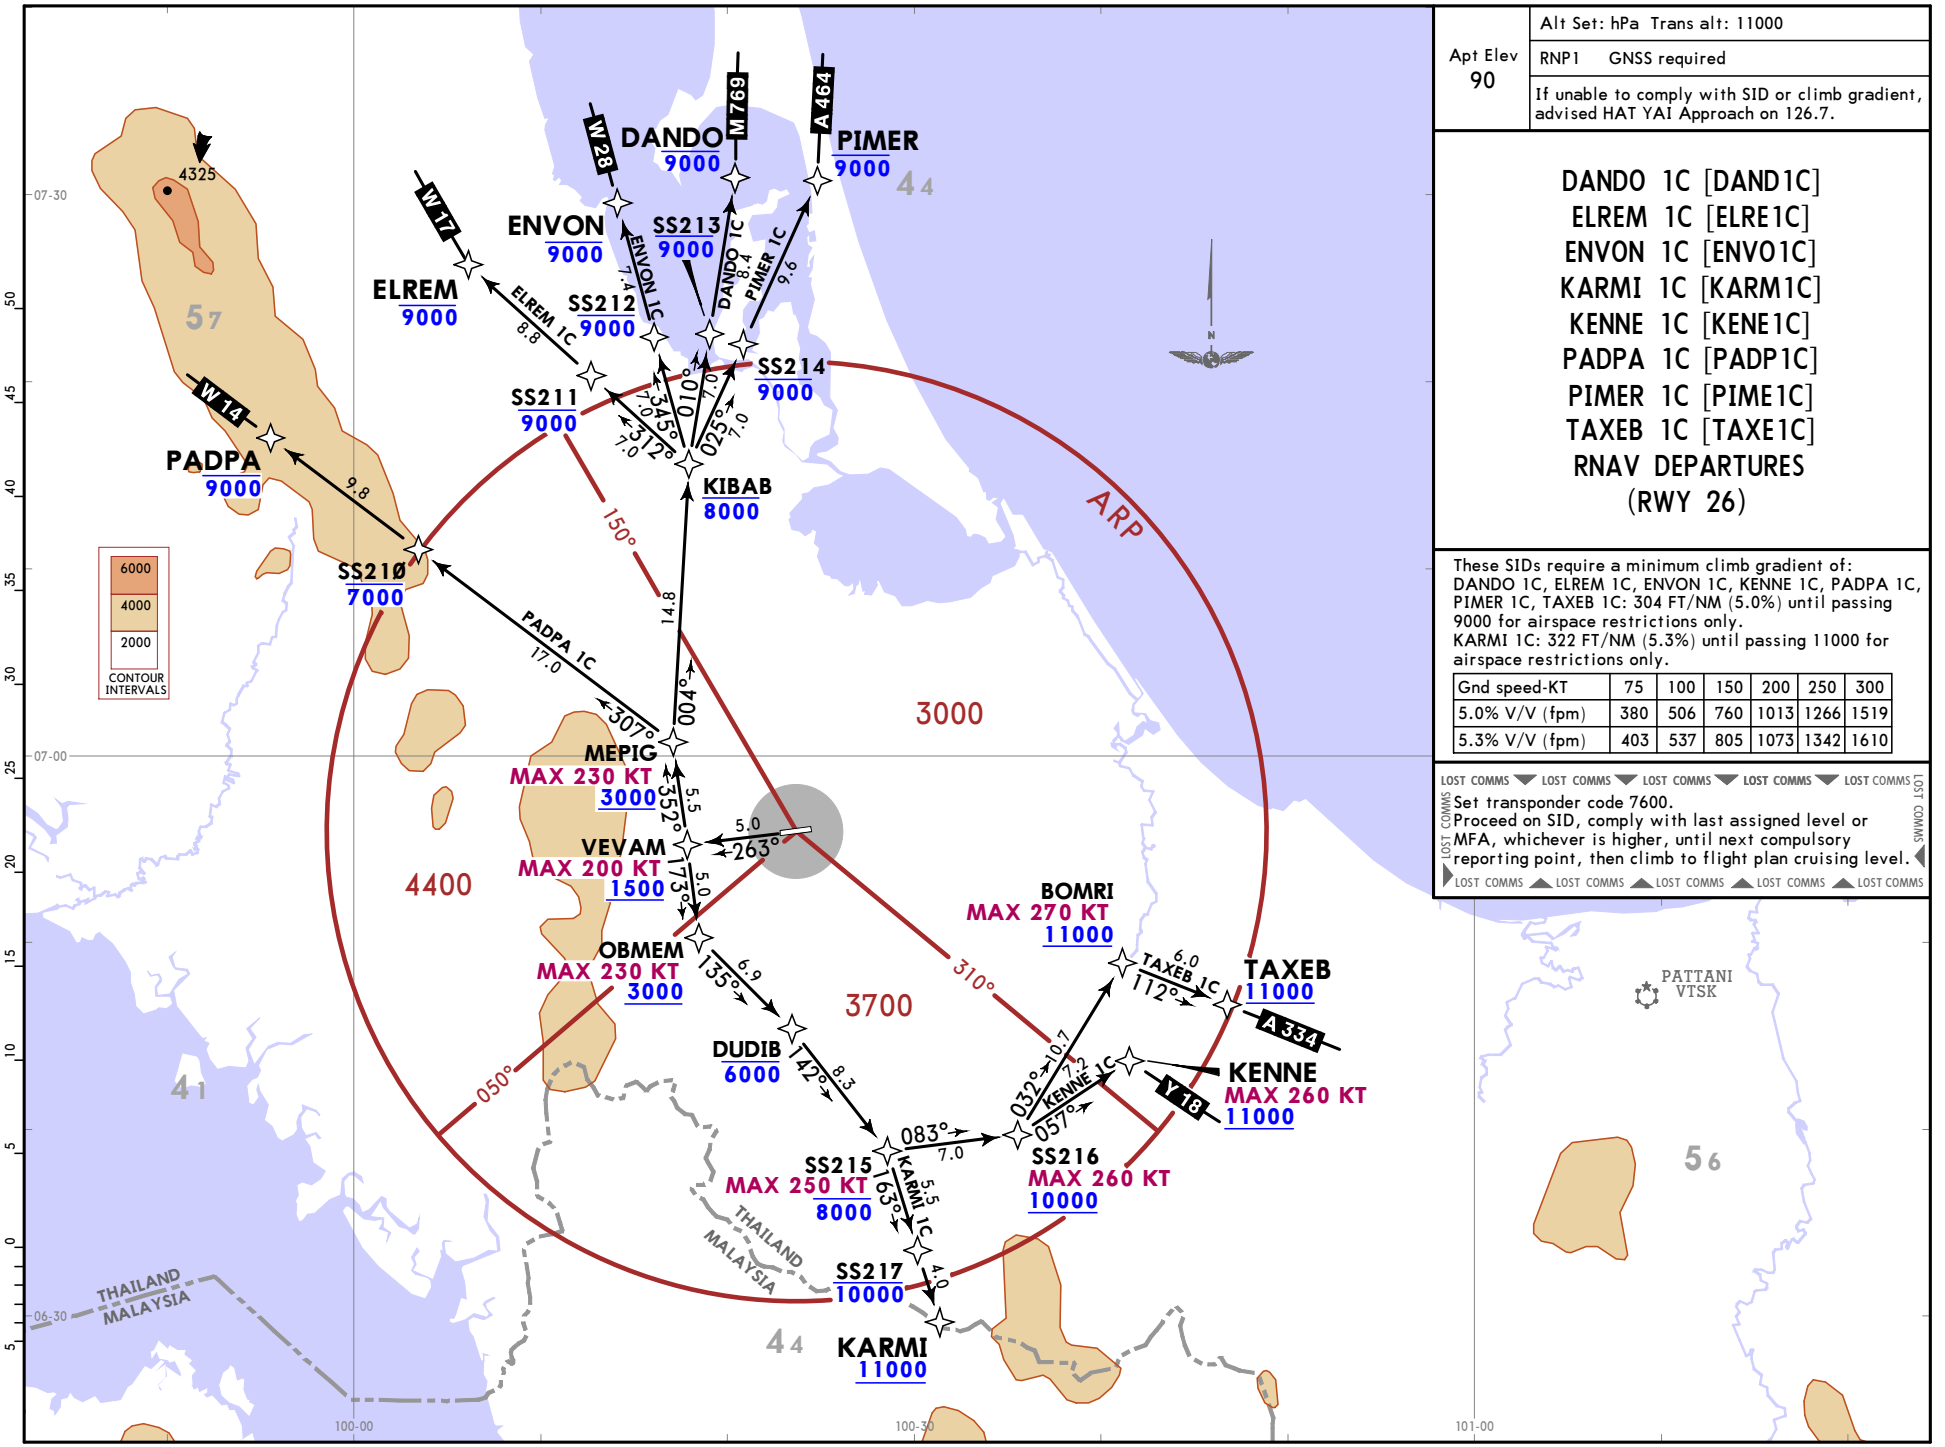

Apt Elev
90

Alt Set: hPa Trans alt: 11000

RNP1 GNSS required

If unable to comply with SID or climb gradient, advised HAT YAI Approach on 126.7.

DANDO 1C [DAND1C]
ELREM 1C [ELRE1C]
ENVON 1C [ENVO1C]
KARMI 1C [KARM1C]
KENNE 1C [KENE1C]
PADPA 1C [PADP1C]
PIMER 1C [PIME1C]
TAXEB 1C [TAXE1C]
RNAV DEPARTURES
(RWY 26)

These SIDs require a minimum climb gradient of:
DANDO 1C, ELREM 1C, ENVON 1C, KENNE 1C, PADPA 1C, PIMER 1C, TAXEB 1C: 304 FT/NM (5.0%) until passing 9000 for airspace restrictions only.
KARMI 1C: 322 FT/NM (5.3%) until passing 11000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V (fpm)	380	506	760	1013	1266	1519
5.3% V/V (fpm)	403	537	805	1073	1342	1610


LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

CHANGES: Bearing from KIBAB to SS213 & from SS213 to DANDO.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

ATIS	Apt Elev	Alt Set: hPa Trans alt: 11000
128.8	90	

HOLDING POINT FOR RADAR SERVICE

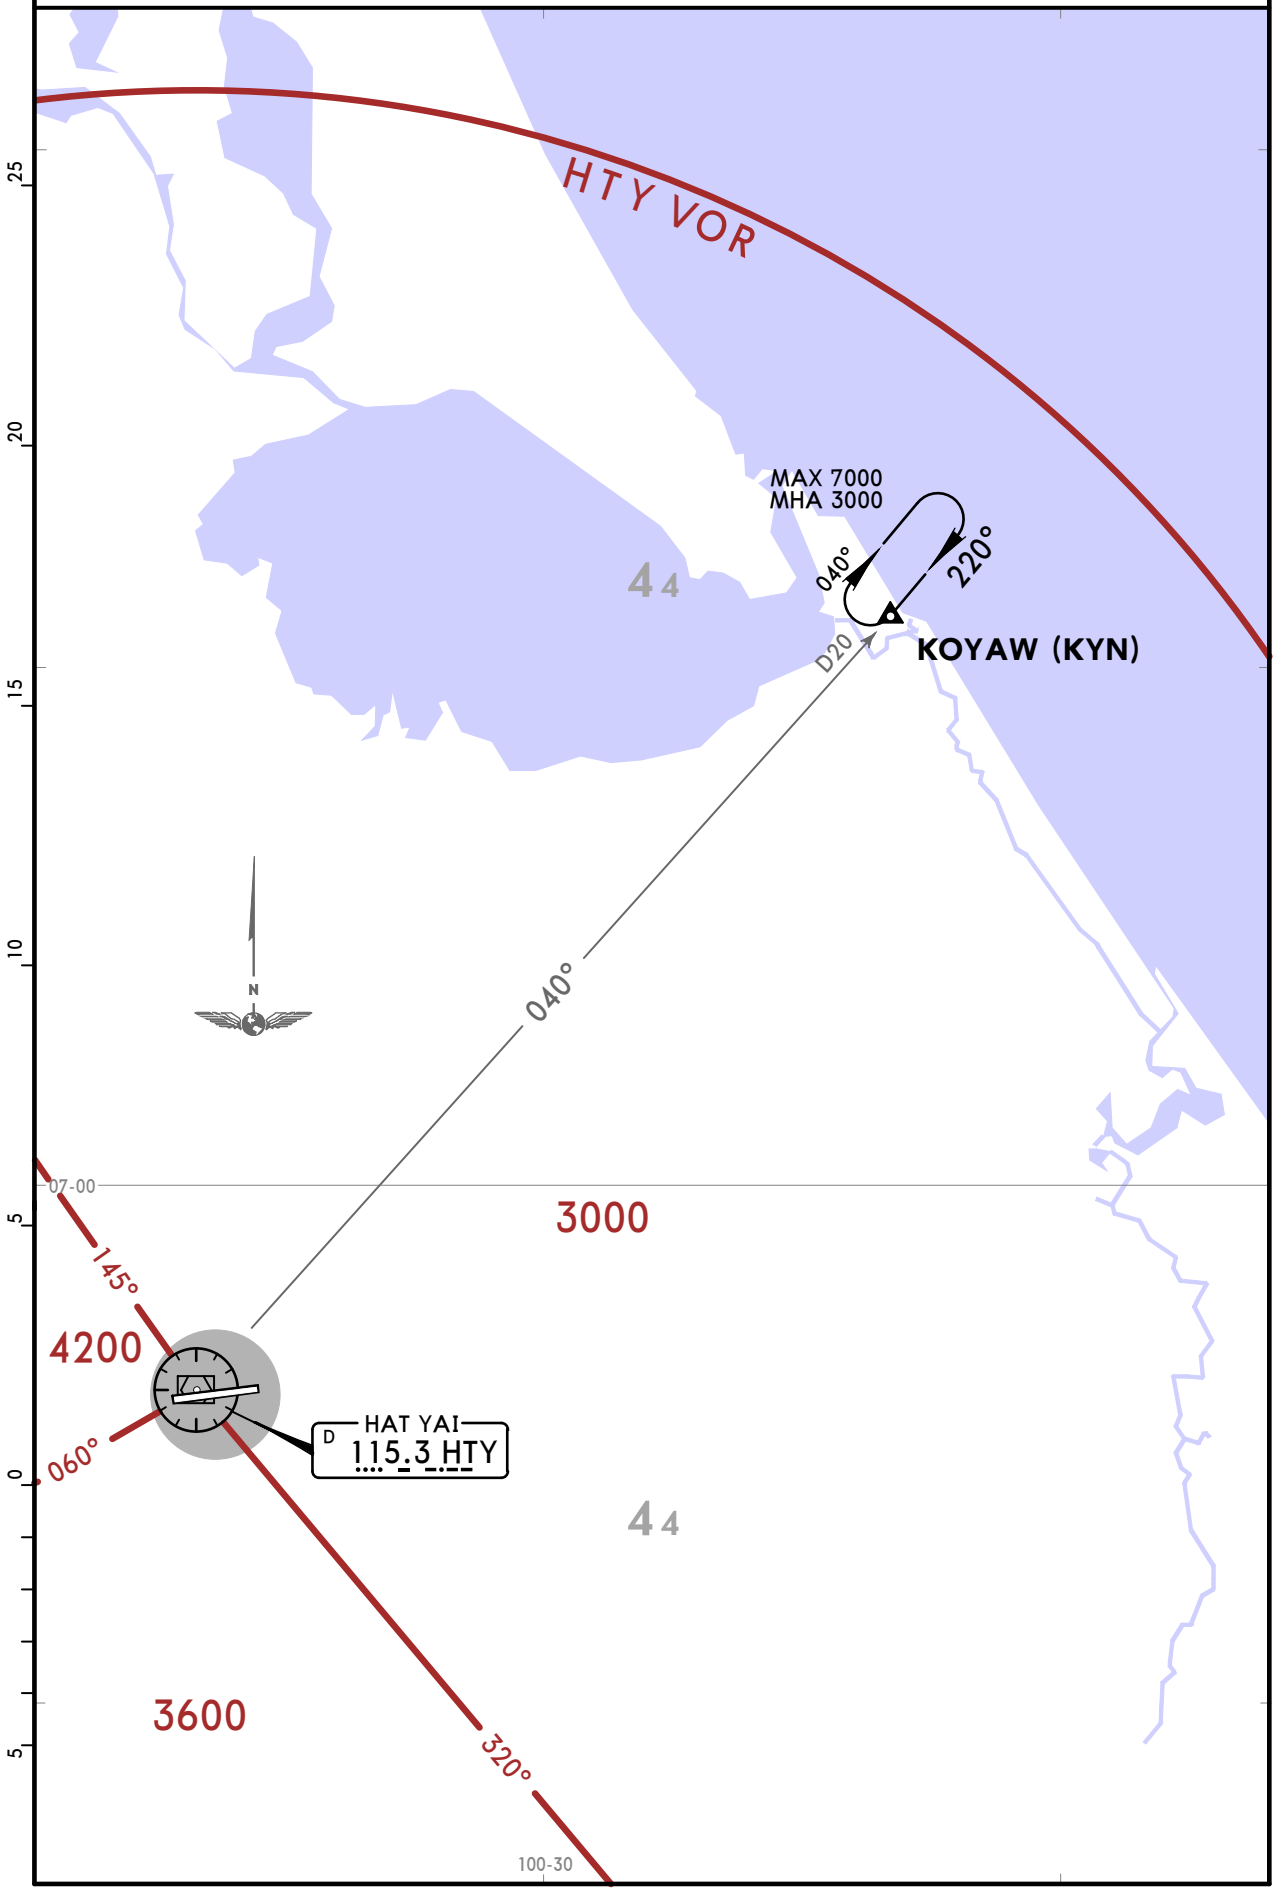

CHANGES: Chart reindexed.

© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN SONGKHLA, THAILAND
8 MAY 26 (10-2) Eff 14 May
RNAV STAR

ATIS	Apt Elev	Alt Set: hPa Trans level: FL130
128.8	90	RNP1 GNSS required

ELREM 1B [ELRE1B]
ENVON 1B [ENVO1B]
KENNE 1B [KENE1B]
OBLEX 1B [OBLE1B]
PADPA 1B [PADP1B]
PIMER 1B [PIME1B]
TAMOS 1B [TAMO1B]
TAXEB 1B [TAXE1B]
RNAV ARRIVALS
(RWY 08)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC.

DUDIB
090°
270°
MAX 230 KT
MHA 8000

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level. Proceed to PIMAN.
Carry out standard instument approach to RWY08.

CONTOUR INTERVALS: 6000, 4000, 2000

ELREM 10000
ENVON 10000
PIMER 10000
OBLEX 10000
PADPA 10000
ISDIV 10000
SS807 10000
SS809 10000
ESLUG 10000
ALDUG MAX 230 KT 8000
VEGTI MAX 210 KT 5500
PIMAN MAX 190 KT 3500
DUDIB MAX 230 KT 8000
SS808 9000
TAXEB 11000
IGMUG MAX 210 KT 5500
POVAK 9000
KENNE 11000
SS221 10000
TAMOS 11000

W17 W28 A464 M757 W14 A334 Y18

ELREM 1B ENVON 1B PIMER 1B OBLEX 1B PADPA 1B TAXEB 1B KENNE 1B TAMOS 1B

ARP 150° 050° 310°

MAX 230 KT MHA 8000

3000 4400 3700

THAILAND MALAYSIA

PATTANI VTSK

CHANGES: Bearings from KENNE to POVAK & from OBLEX to ESLUG.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
8 MAY 26 (10-2A) Eff 14 May


SONGKHLA, THAILAND
RNAV STAR

ATIS	Apt Elev	Alt Set: hPa Trans level: FL130
128.8	90	RNP1 GNSS required

ELREM 1A [ELRE1A]
ENVON 1A [ENVO1A]
KENNE 1A [KENE1A]
OBLEX 1A [OBLE1A]
PADPA 1A [PADP1A]
PIMER 1A [PIME1A]
TAMOS 1A [TAMO1A]
TAXEB 1A [TAXE1A]
RNAV ARRIVALS
(RWY 26)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC.

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level. Proceed to RISRO.
Commence descend in the RISRO holding as close as EAT or ETA to 3000
Carry out standard instument approach to RWY26.

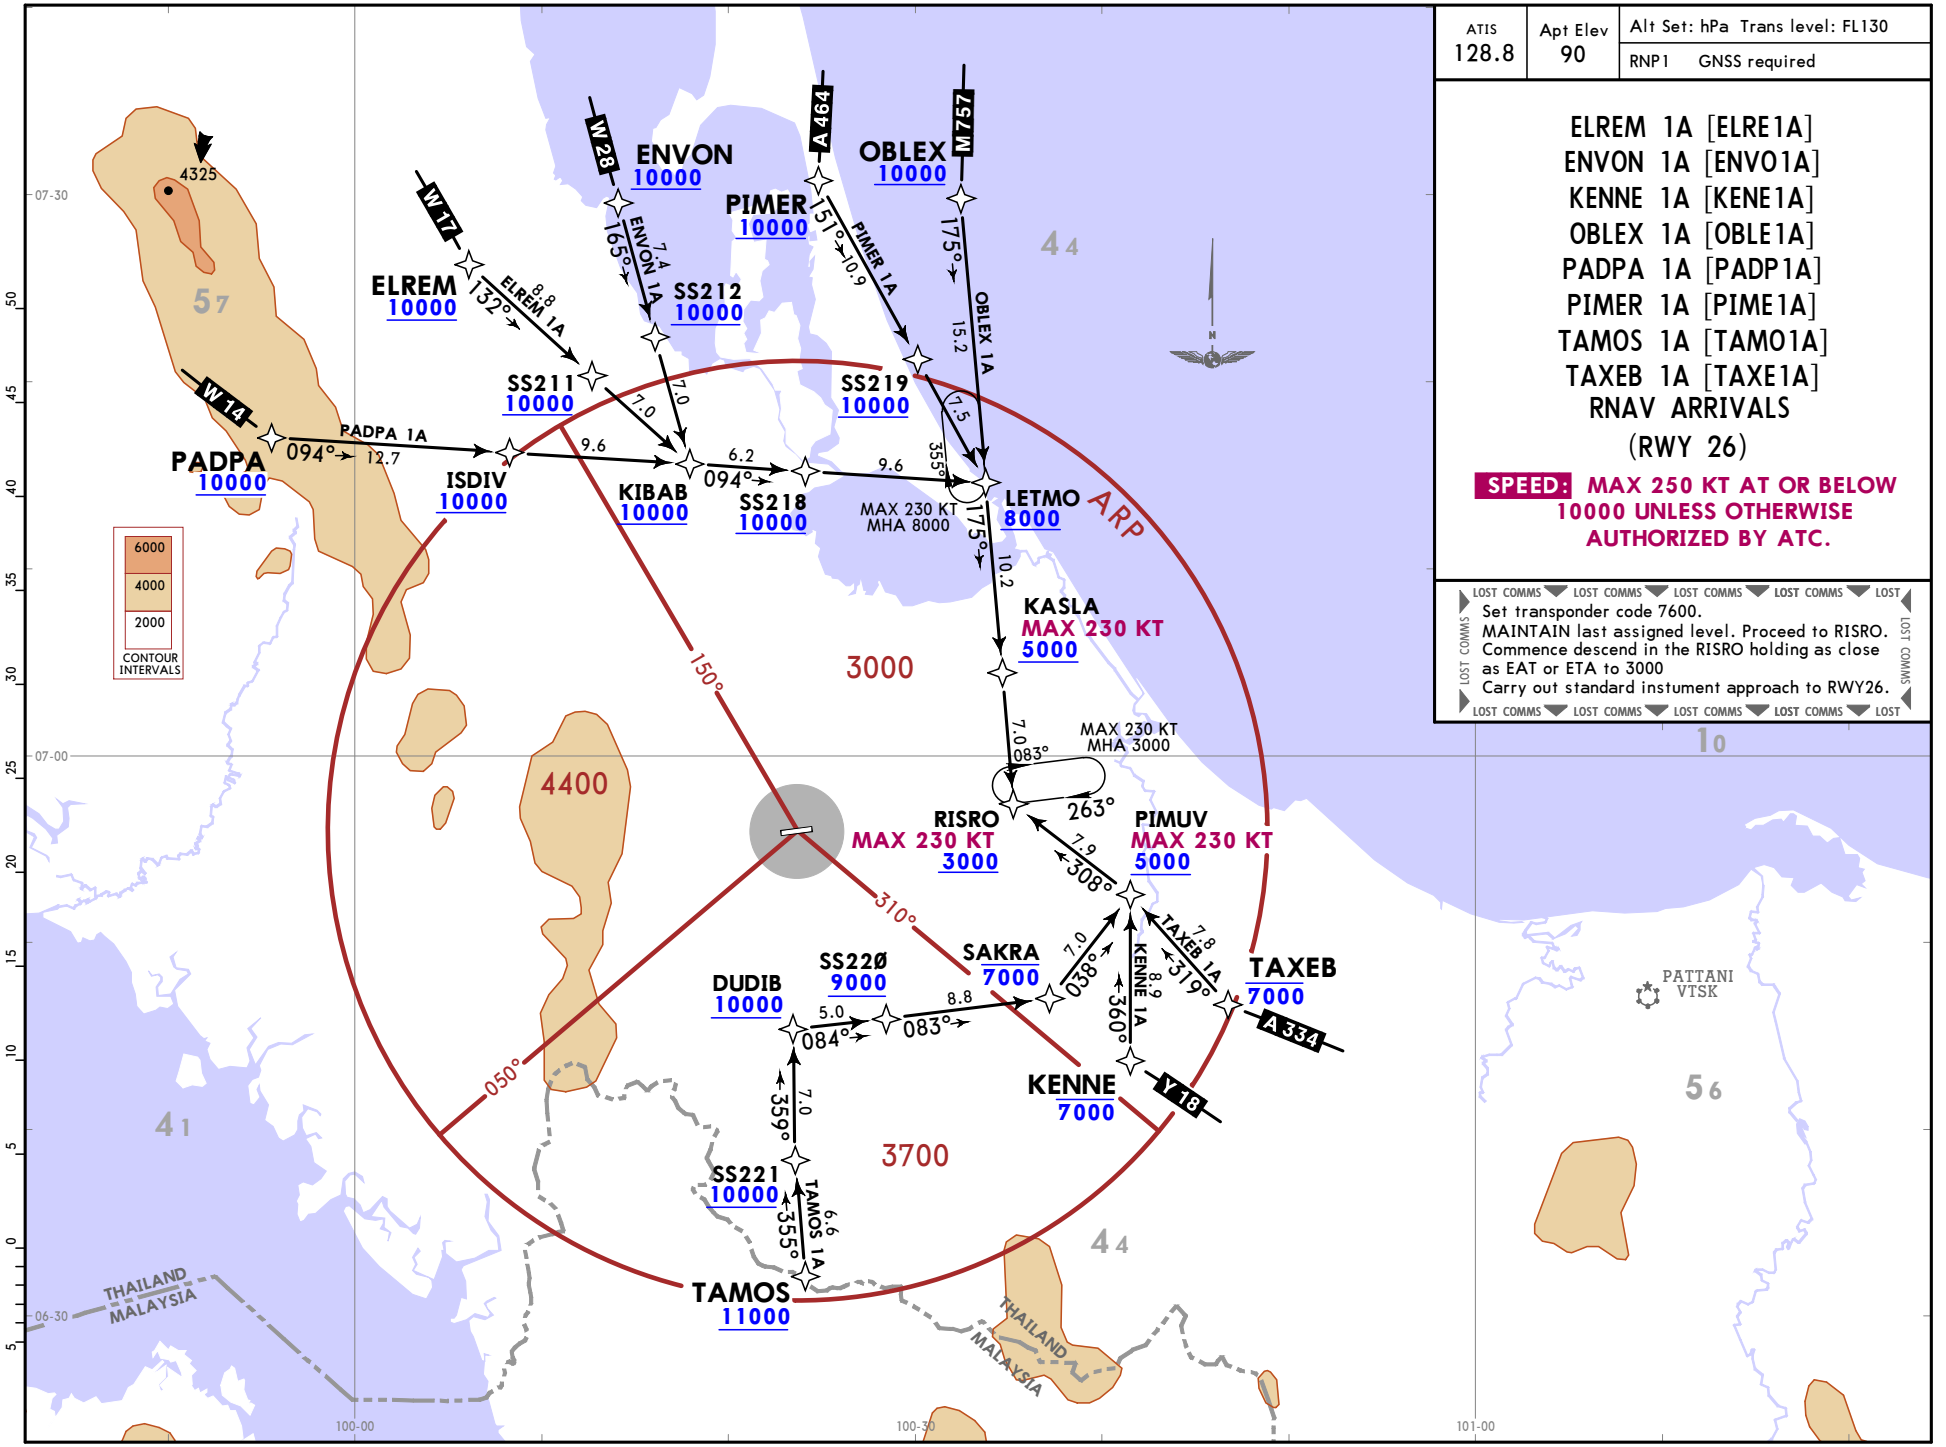

CHANGES: None.

© JEPPESEN, 2024, 2025. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (11-2)

SONGKHLA, THAILAND
ILS or LOC Y Rwy 26

ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9


BRIEFING STRIP ™

LOC IHTY	Final Apch Crs	SS2Ø2 MANDATORY	ILS DA(H) Refer to Minimums	Apt Elev 90′ Rwy 58′
109.9	263°	1500′(1442′)		


MISSED APCH: Climb STRAIGHT AHEAD to 1000′, then turn LEFT to intercept outbound via HTY VOR R-084 and proceed to RISRO at minimum 3000′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT untill after turn.


Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000′

VOR, DME required.



MSA HTY VOR

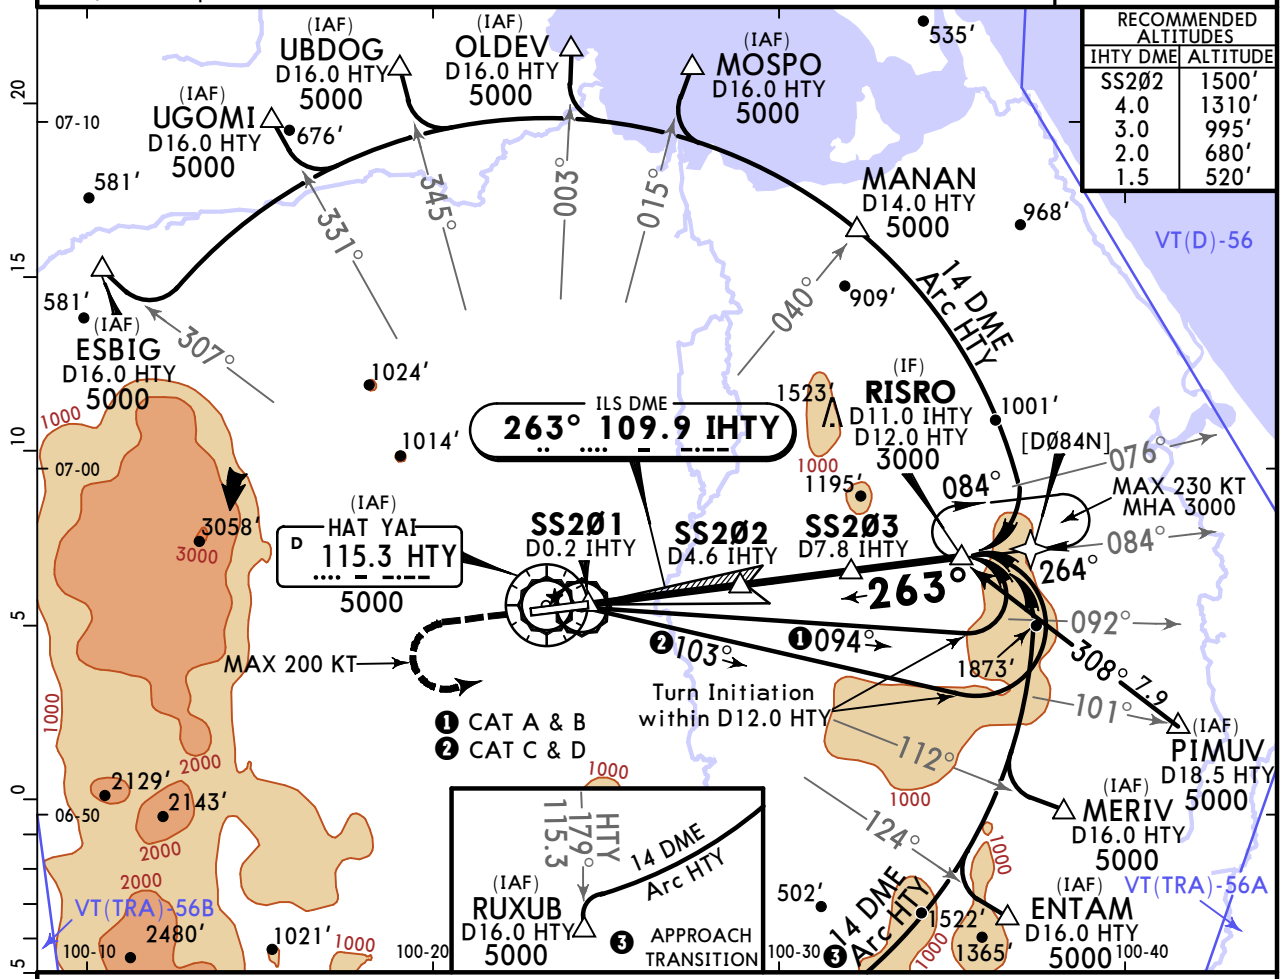

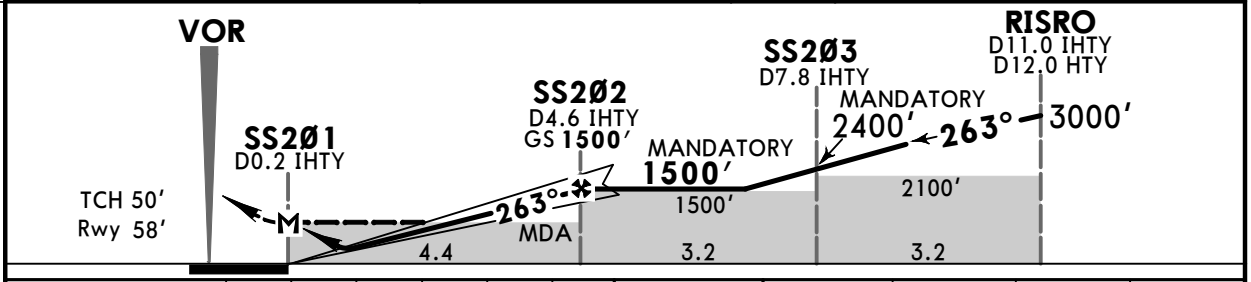

Gnd speed-Kts	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849
MAP at SS2Ø1						

HIALS | PAPI PAPI | 1000′ | LT | HTY 115.3 R-084

Std STRAIGHT-IN LANDING

DA(H)	ILS	LOC (GS out) CDFA
A	290′(232′)	310′(252′)
B	300′(242′)	320′(262′)
❶ DA/MDA(H)		520′(462′)

	ALS out		ALS out
A	R800m	R1200m	R1500m
B			
C		R1300m	R1800m R2200m
D	R900m		

CIRCLE-TO-LAND

Max Kts.	MDA(H)	
100	900′(810′)	V1500m
135	900′(810′)	V1600m
180	1500′(1410′)	V2400m
205	1500′(1410′)	V3600m

PANS OPS

❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces renamed.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (11-1)

SONGKHLA, THAILAND
ILS or LOC Z Rwy 26


ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9

BRIEFING STRIP ™


LOC IHTY	Final Apch Crs	SS2Ø2 MANDATORY	ILS DA(H) Refer to Minimums	Apt Elev 90′ Rwy 58′
109.9	263°	1500′(1442′)		

MISSED APCH: Climb on track 263° to 1000′, then turn LEFT direct to SS2Ø5 at minimum 2300′ and continue to SS2Ø4 at minimum 3000′ then proceed to RISRO and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT untill after turn.


Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL130	Trans alt: 11000′
RNP1 required			
1. GNSS required. 2. DME required.			



MSA ARP

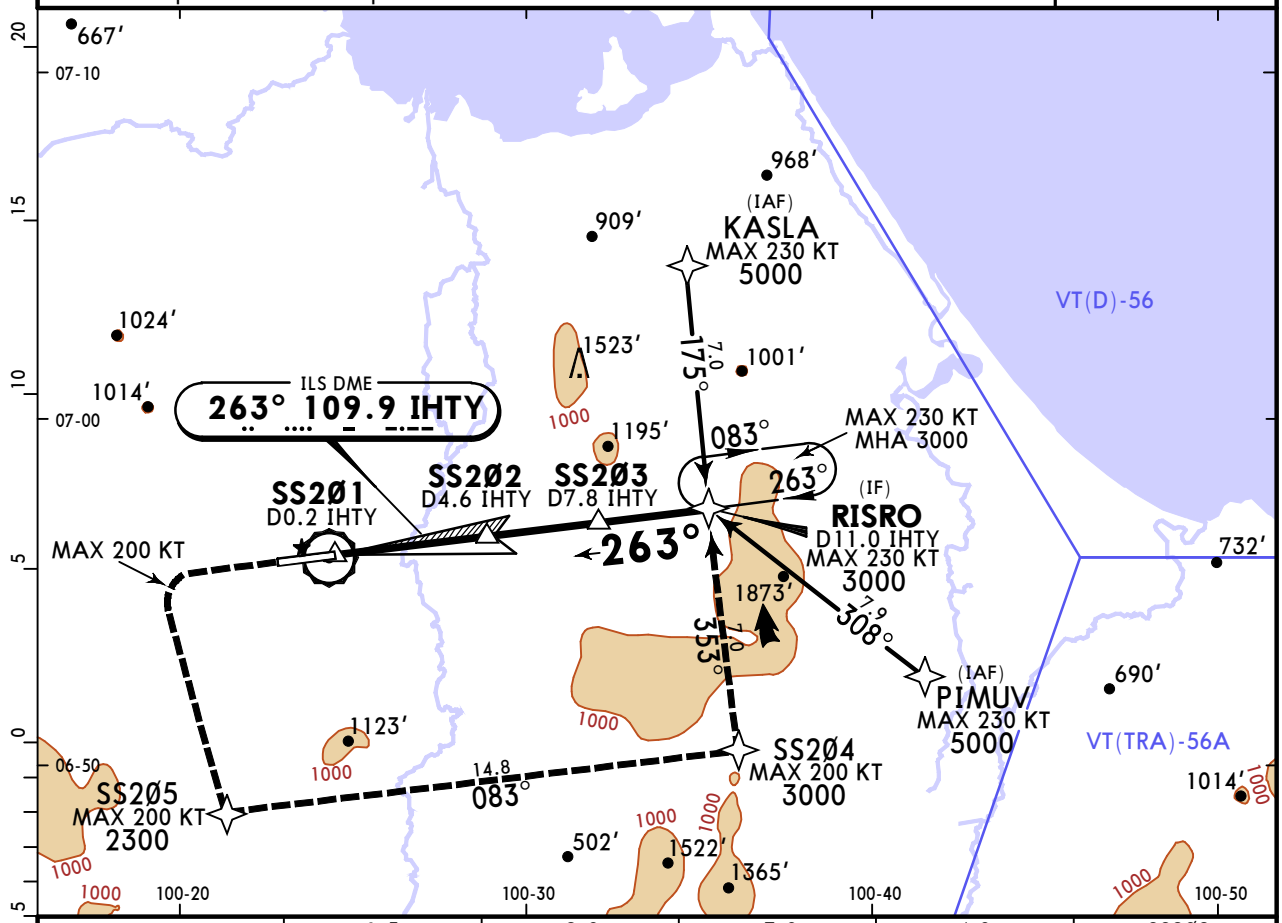

IHTY DME	1.5	2.0	3.0	4.0	SS2Ø2
ALTITUDE	520′	680′	995′	1310′	1500′

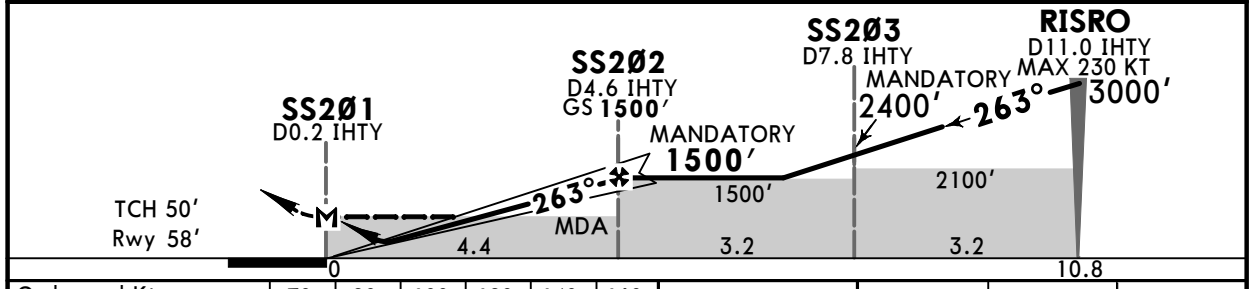

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at SS2Ø1							

HIALS
PAPI PAPI
1000′ on 263°

Std STRAIGHT-IN LANDING

ILS		LOC (GS out)	
DA(H)	A:290′(232′) C:310′(252′) B:300′(242′) D:320′(262′)	CDFA 1 DA/MDA(H)	520′(462′)

	ALS out		ALS out
A	R800m	R1200m	R1500m
B			
C		R1300m	R1800m R2200m
D	R900m		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	900′(810′)	V1500m
135	900′(810′)	V1600m
180	1500′(1410′)	V2400m
205	1500′(1410′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces renamed, DME requirement added.

© JEPPESEN, 2024, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (12-1)

SONGKHLA, THAILAND
RNP Rwy 08

ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9

BRIEFING STRIP™

RNAV	Final Apch Crs	SS8Ø2 MANDATORY	DA/MDA(H)	Apt Elev 90′ Rwy 65′
	083°	1400′(1335′)	620′(555′)	

MISSED APCH: Climb on track 083° to 3500′, then turn RIGHT direct to DUDIB at minimum 8000′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.


Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000′


RNP Apch

No direct to IF and FAF due to high terrain and proximity of Kuala Lumpur FIR.

150° 3000 4400 050° 3700 310°
MSA ARP

RECOMMENDED ALTITUDES	
NM TO SS8Ø1	ALTITUDE
SS8Ø2	1400′
4.0	1380′
3.0	1065′
2.0	750′
1.6	620′

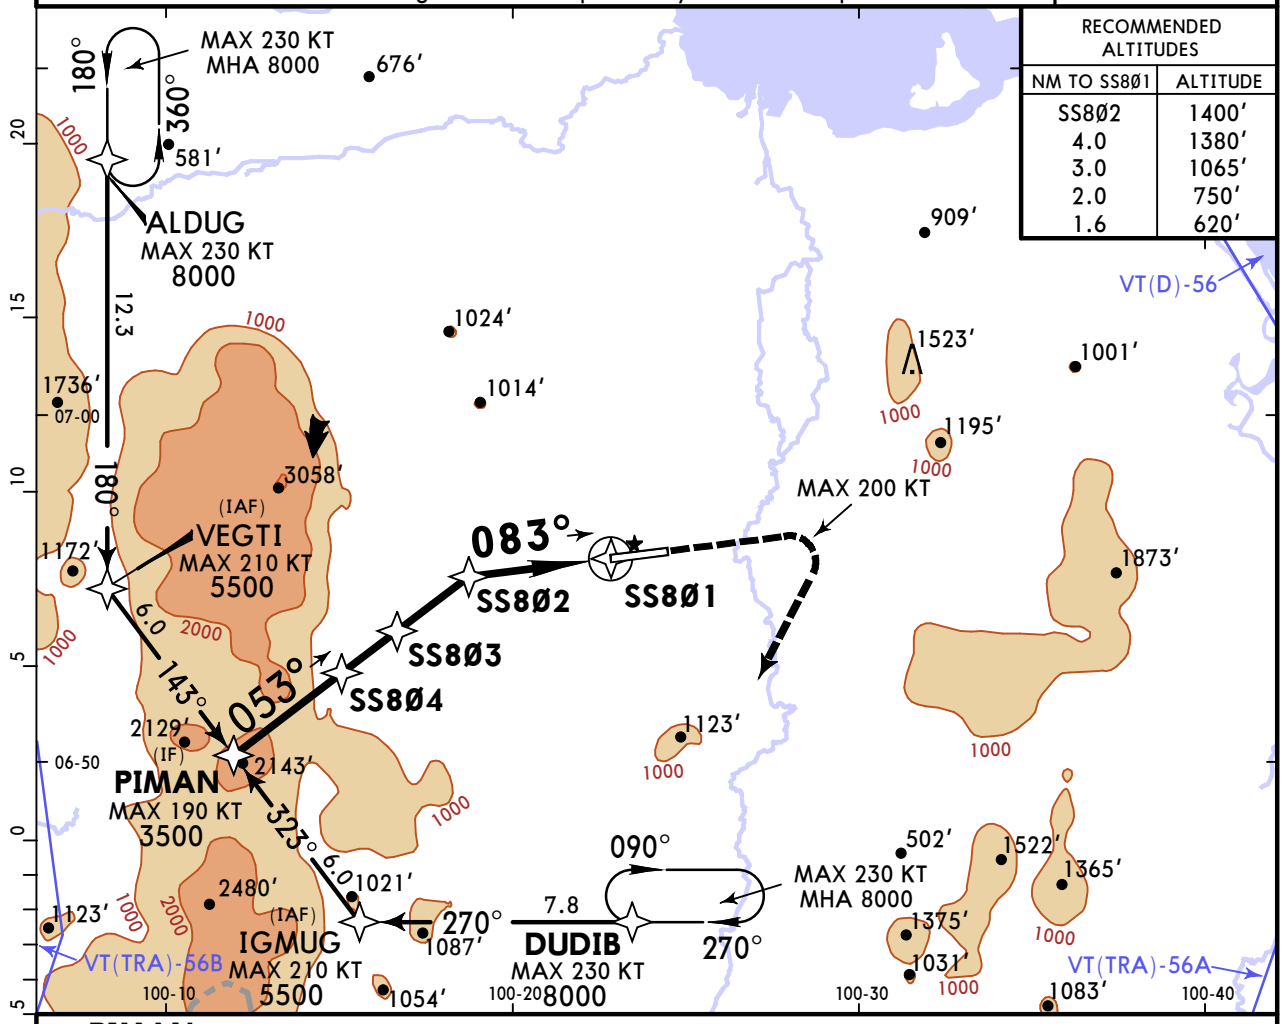

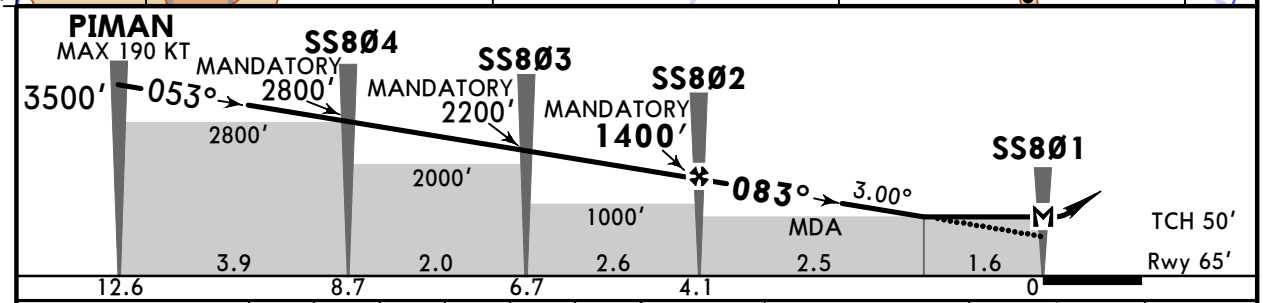

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at SS8Ø1						

SSALF
PAPI PAPI

3500′ on 083° RT D DUDIB

Std STRAIGHT-IN LANDING
LNAV
CDFA
1 DA/MDA(H) **620′**(555′)
ALS out

A	R1500m	
B		
C	R2100m	R2400m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	900′ (810′)	V1500m
135	900′ (810′)	V1600m
180	1500′ (1410′)	V2400m
205	1500′ (1410′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces renamed.

© JEPPESEN, 2009, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (12-2)

SONGKHLA, THAILAND
RNP Rwy 26

ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9


BRIEFING STRIP™

RNAV	Final Apch Crs	SS20Ø2 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 90′ Rwy 58′
	263°	1500′(1442′)	420′(362′)	


MISSED APCH: Climb on track 263° to 1000′, then turn LEFT direct to SS20Ø5 at minimum 2300′ and continue to SS20Ø4 at minimum 3000′ then proceed to RISRO and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.

Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL130	Trans alt: 11000′


RNP Apch
Baro-VNAV not authorized below +10°C.



MSA ARP

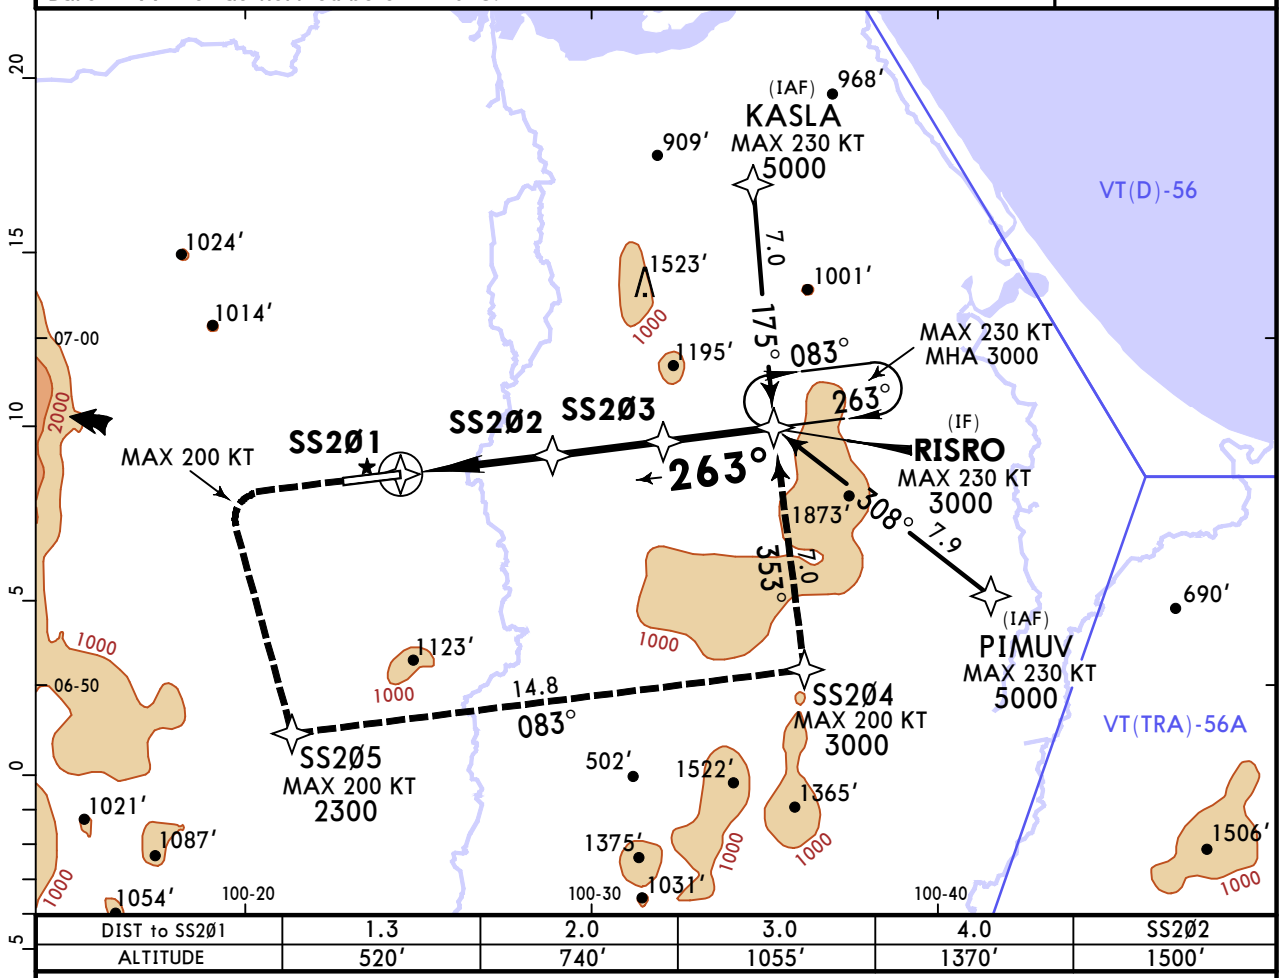

DIST to SS20Ø1	1.3	2.0	3.0	4.0	SS20Ø2
ALTITUDE	520′	740′	1055′	1370′	1500′

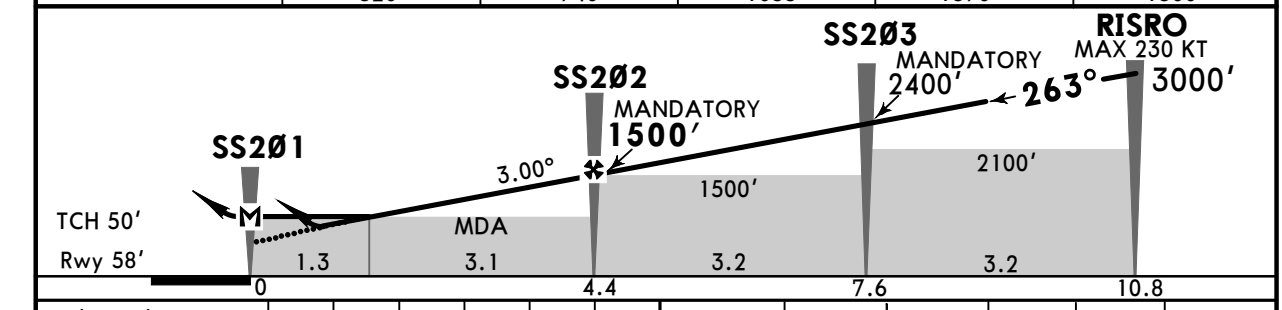

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at SS20Ø1						

SSALF
PAPI PAPI
1000′ on 263°
LT
SS20Ø5

PANS OPS

Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 420′(362′)		LNAV CDFA 1 DA/MDA(H) 520′(462′)	
		ALS out		ALS out
A	R1300m	R1500m	R1500m	
B				
C		R1700m	R1800m	R2200m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	900′ (810′)	V1500m
135	900′ (810′)	V1600m
180	1500′ (1410′)	V2400m
205	1500′ (1410′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces renamed.

© JEPPESEN, 2009, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (13-2)

SONGKHLA, THAILAND
VOR A

ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9


BRIEFING STRIP ™

VOR HTY	Final Apch Crs	SS2Ø9 MANDATORY	MDA(H) Refer to Minimums	Apt Elev 90′
115.3	183°	1600′ (1510′)		


MISSED APCH: Climb STRAIGHT AHEAD to 2000′, then turn LEFT to intercept outbound via HTY VOR R-003 and proceed to ATMOT at minimum 3000′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.

Alt Set: hPa	Apt Elev: 3 hPa	Trans level: FL130	Trans alt: 11000′


DME required.



MSA HTY VOR

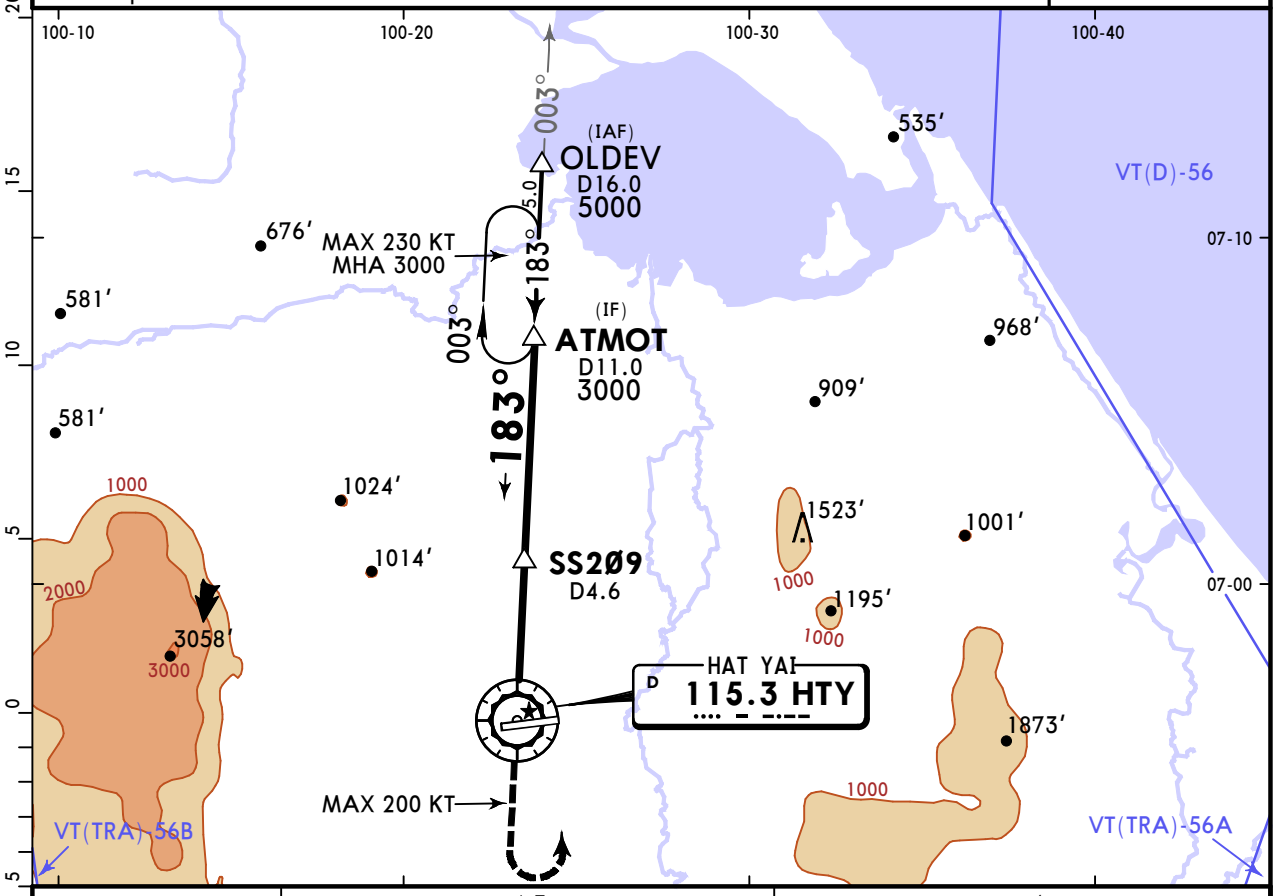

HTY DME	4.3	SS2Ø9
ALTITUDE	1500′	1600′

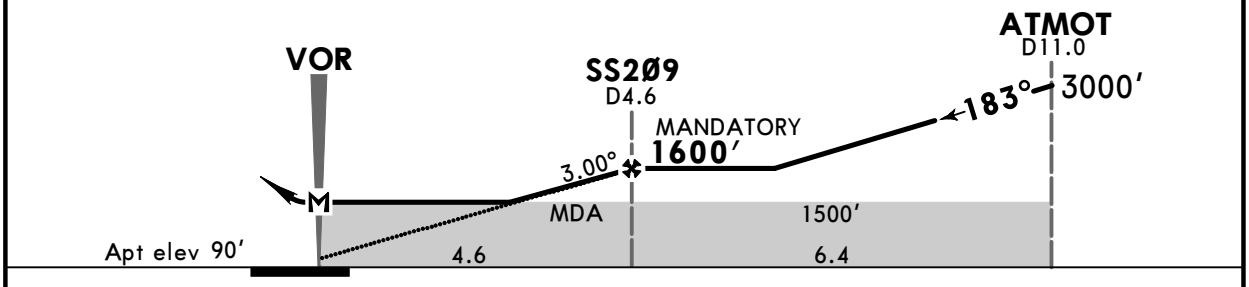

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at VOR						

Lighting - Refer to Airport Chart	2000′	3000′ LT	HTY 115.3 R-003	ATMOT

Std CIRCLE-TO-LAND

PANS OPS

	Max Kts	MDA(H)	
A	100	900′ (810′)	V1500m
B	135	900′ (810′)	V1600m
C	180	1500′ (1410′)	V2400m
D	205	1500′ (1410′)	V3600m

CHANGES: Airspaces renamed.

© JEPPESEN, 2007, 2026. ALL RIGHTS RESERVED.

VTSS/HDY
HAT YAI INTL

JEPPESEN
22 MAY 26 (13-1)

SONGKHLA, THAILAND
VOR Rwy 26

ATIS	HAT YAI Approach (R)	HAT YAI Tower	Ground
128.8	126.7	118.1	121.9


BRIEFING STRIP ™

VOR HTY	Final Apch Crs	SS2Ø7 MANDATORY	DA/MDA(H)	Apt Elev 90′ Rwy 58′
115.3	266°	1500′(1442′)	520′(462′)	

MISSED APCH: Climb STRAIGHT AHEAD to 1000′, then turn LEFT to intercept outbound via HTY VOR R-086 and proceed to UPVEK at minimum 3000′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.


Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL130	Trans alt: 11000′


DME required.



MSA HTY VOR

RECOMMENDED ALTITUDES	
HTY DME	ALTITUDE
SS2Ø7	1500′
5.0	1310′
4.0	995′
3.0	680′
2.5	520′

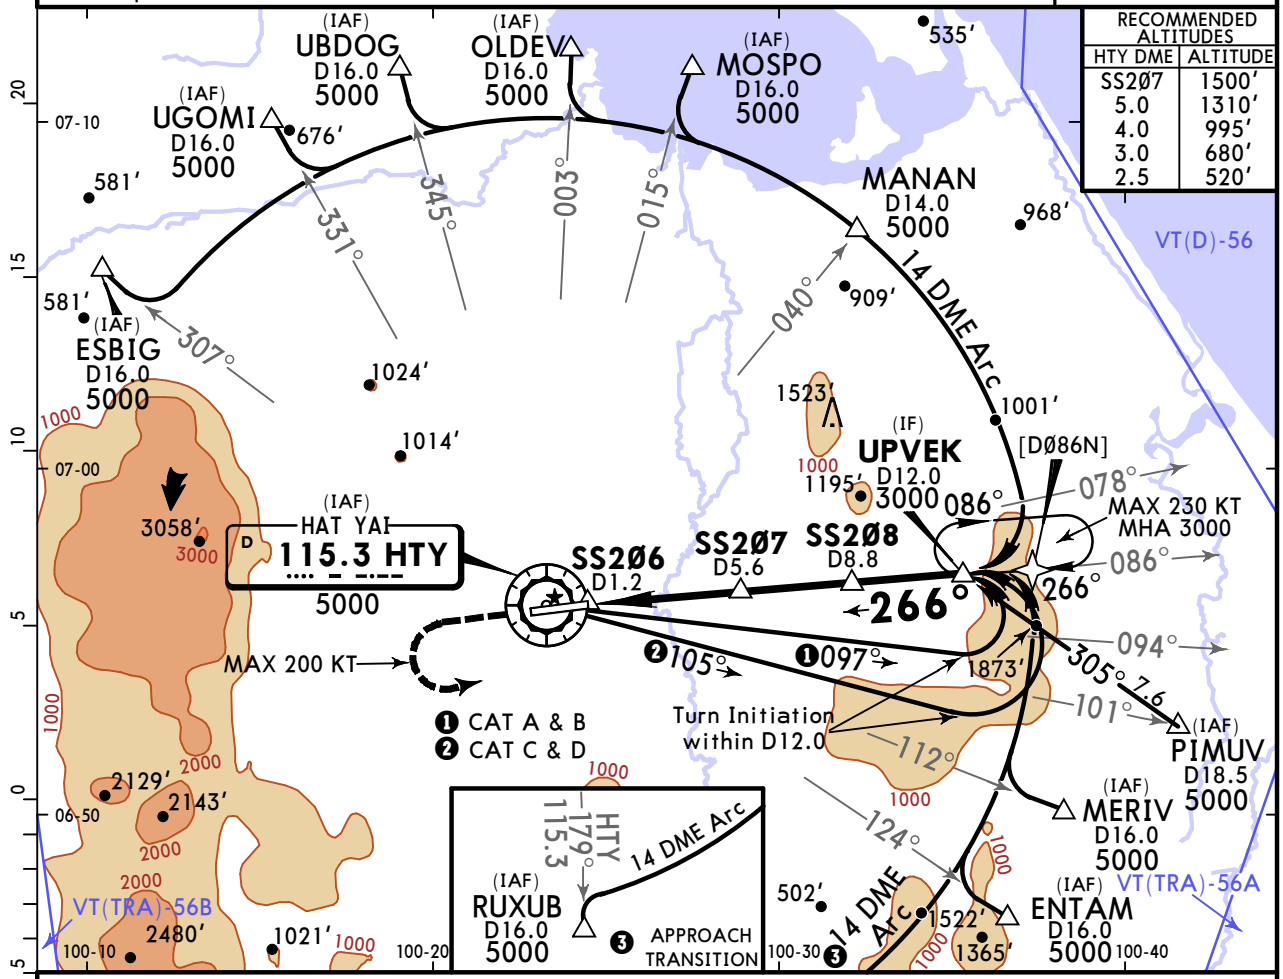

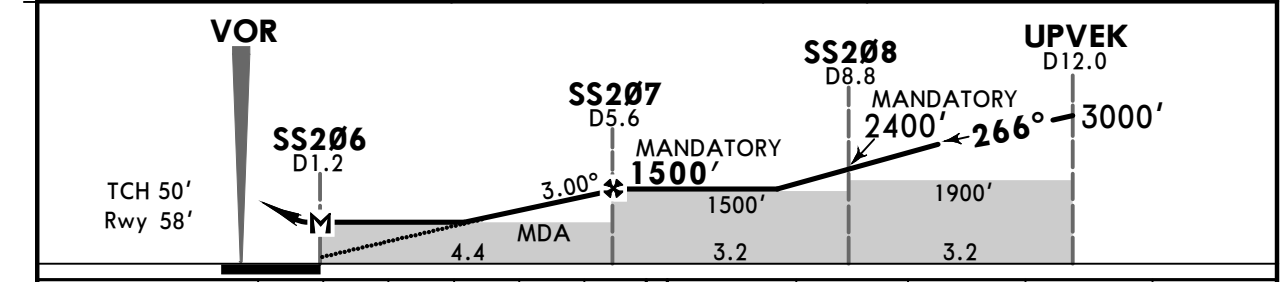

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at SS2Ø6						

HIALS	1000′	3000′	HTY	UPVEK
PAPI PAPI		LT	115.3 R-086	

Std STRAIGHT-IN LANDING

CDFA
1 DA/MDA(H) 520′(462′)
ALS out

A	R1500m	
B		
C	R1800m	R2200m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	900′ (810′)	V1500m
135	900′ (810′)	V1600m
180	1500′ (1410′)	V2400m
205	1500′ (1410′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces renamed.

© JEPPESEN, 2007, 2026. ALL RIGHTS RESERVED.