VTUD/UTH

Apt Elev **579′**
N17 23.2 E102 47.3


JEPPESEN

10 APR 26 (10-9) **Eff 16 Apr**

UDON THANI, THAILAND

UDON THANI

*ATIS	*UDON Ground	*Tower
127.6	121.9	122.5

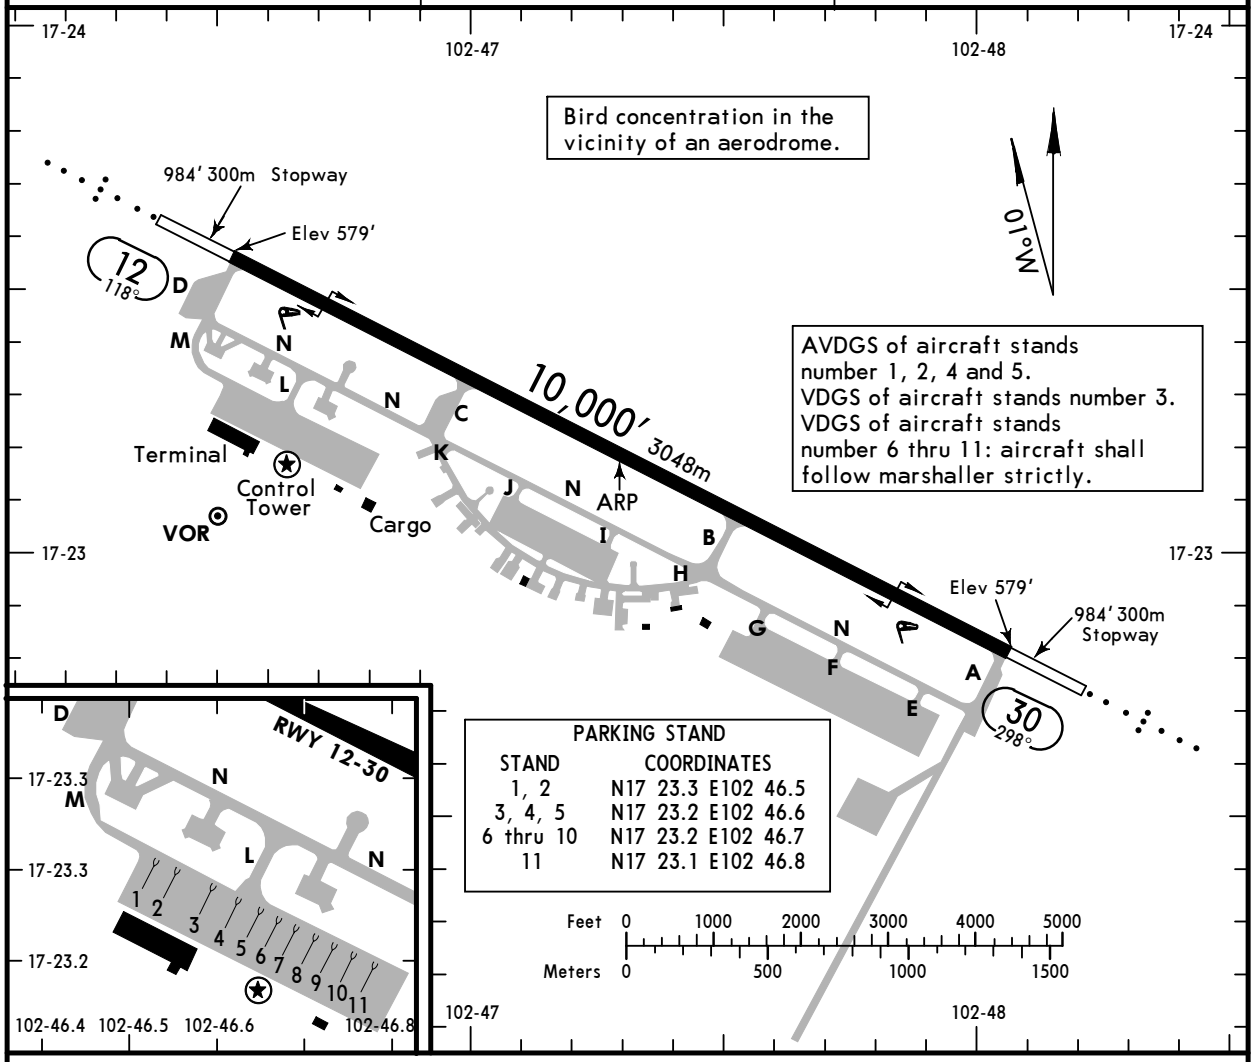

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND — Threshold	Glide Slope	TAKE-OFF	WIDTH
12	HIRL(60m) ❶SALS PAPI-L(angle 3.0°, MEHT 50′)			❷	148′ 45m
30	HIRL(60m) ❶SALS PAPI-L(angle 3.0°, MEHT 53′)		8958′ 2730m		

❶Length 420m.

❷TAKE-OFF RUN AVAILABLE

RWY 12:

From Rwy head	10,000′	3048m
Twy C	7021′	2140m

RWY 30:

From Rwy head	10,000′	3048m
Twy B	6545′	1995m

Std TAKE-OFF

1 RL & RCLM	1 RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA


1 For NIGHT operations, at least RL or CL and RENL are required.

CHANGES: Notes.

© JEPPESEN, 2002, 2026. ALL RIGHTS RESERVED.

Apt Elev 579	Trans alt: 11000 1. OMNIDIRECTIONAL departures during take-off and initial climb-out are permitted during the day and night. ATC clearance to execute an OMNIDIRECTIONAL depature may be issued upon request of the pilot or upon initiative of the ATC and accepted by the pilot. 2. The pilot shall be maintaining a minimum climb gradient up to specific altitude as published shown as below. 3. The pilot shall be responsible for adherence to such obtained ATC clearance. 4. The pilot prior to take-off shall agree to execute this procedure. 5. The ATC clearance shall be readback.

OMNI DEPARTURE
[OMNI]
(ALL RWYS)

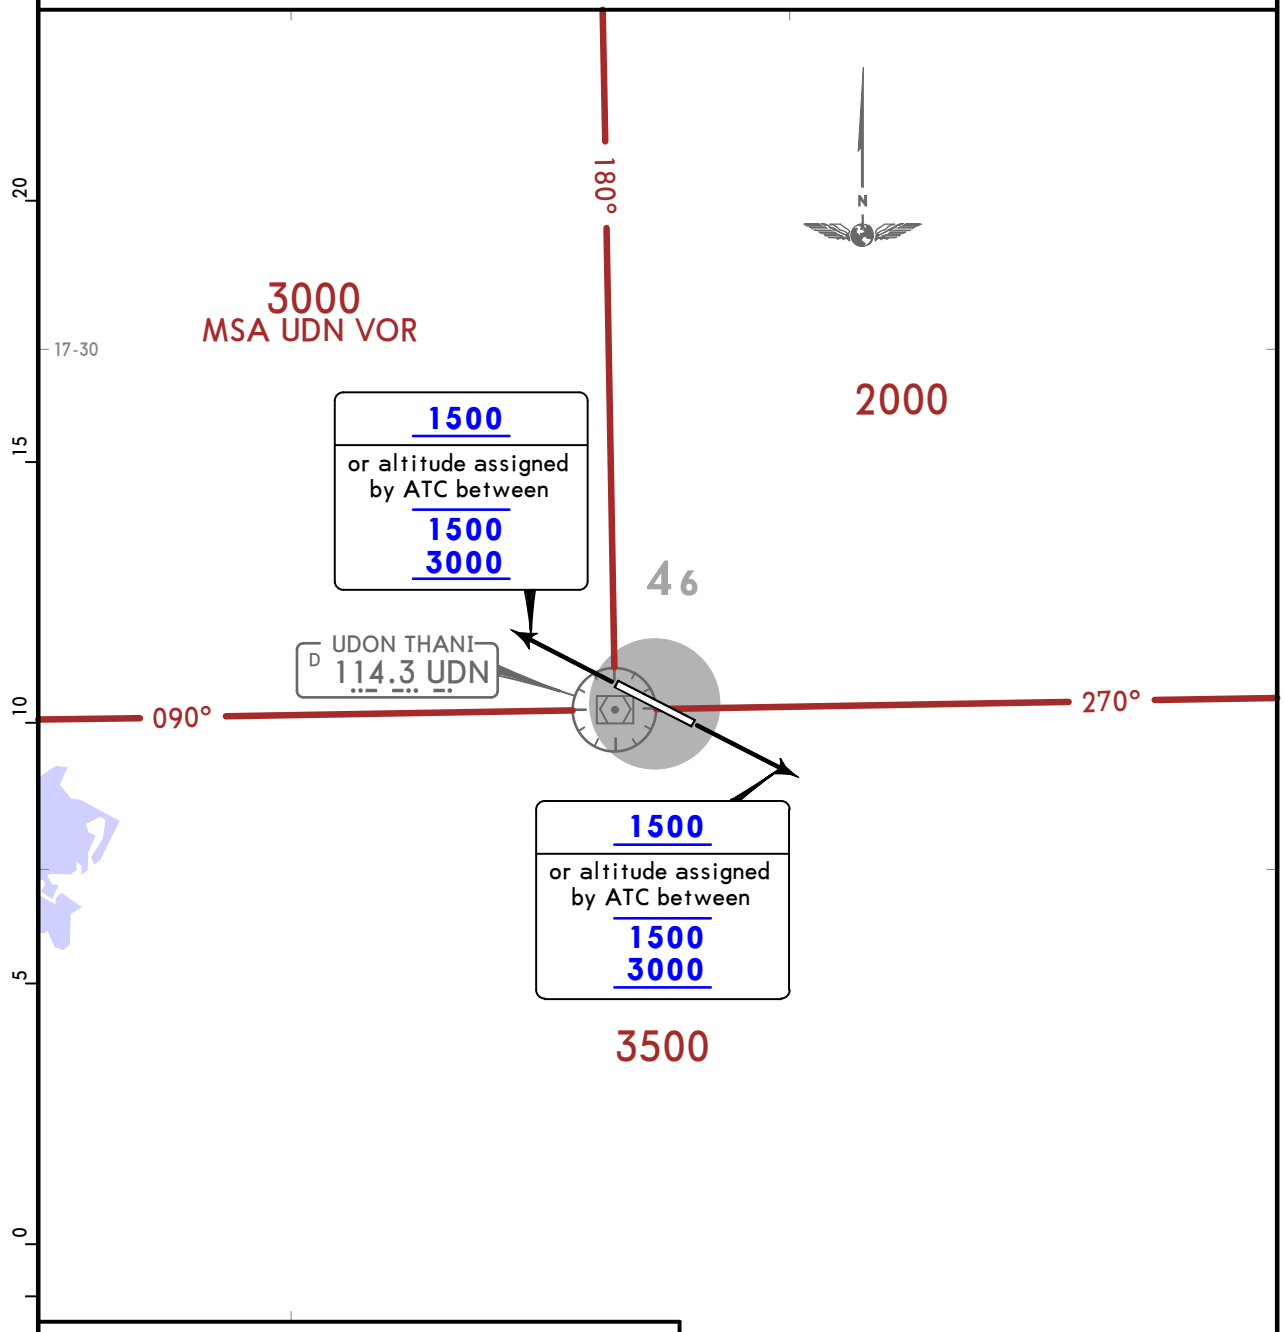

This SID requires a minimum climb gradient of:
201 FT/NM (3.3%) until 3500.

Gnd speed-KT	75	100	150	200	250	300
201 FT/NM	251	335	503	670	838	1005

102-50


RWY	INITIAL CLIMB
12	No turn before DER. After departure climb stright ahead until 1500 (or altitude assigned by ATC between 1500 - 3000), then comply with ATC clearance issued (or as directed by ATC).
30	No turn before DER. After departure climb stright ahead until 1500 (or altitude assigned by ATC between 1500 - 3000), then comply with ATC clearance issued (or as directed by ATC).

CHANGES: New procedure at this airport.

© JEPPESEN, 2023. ALL RIGHTS RESERVED.

UDON THANI, THAILAND

RNAV SID

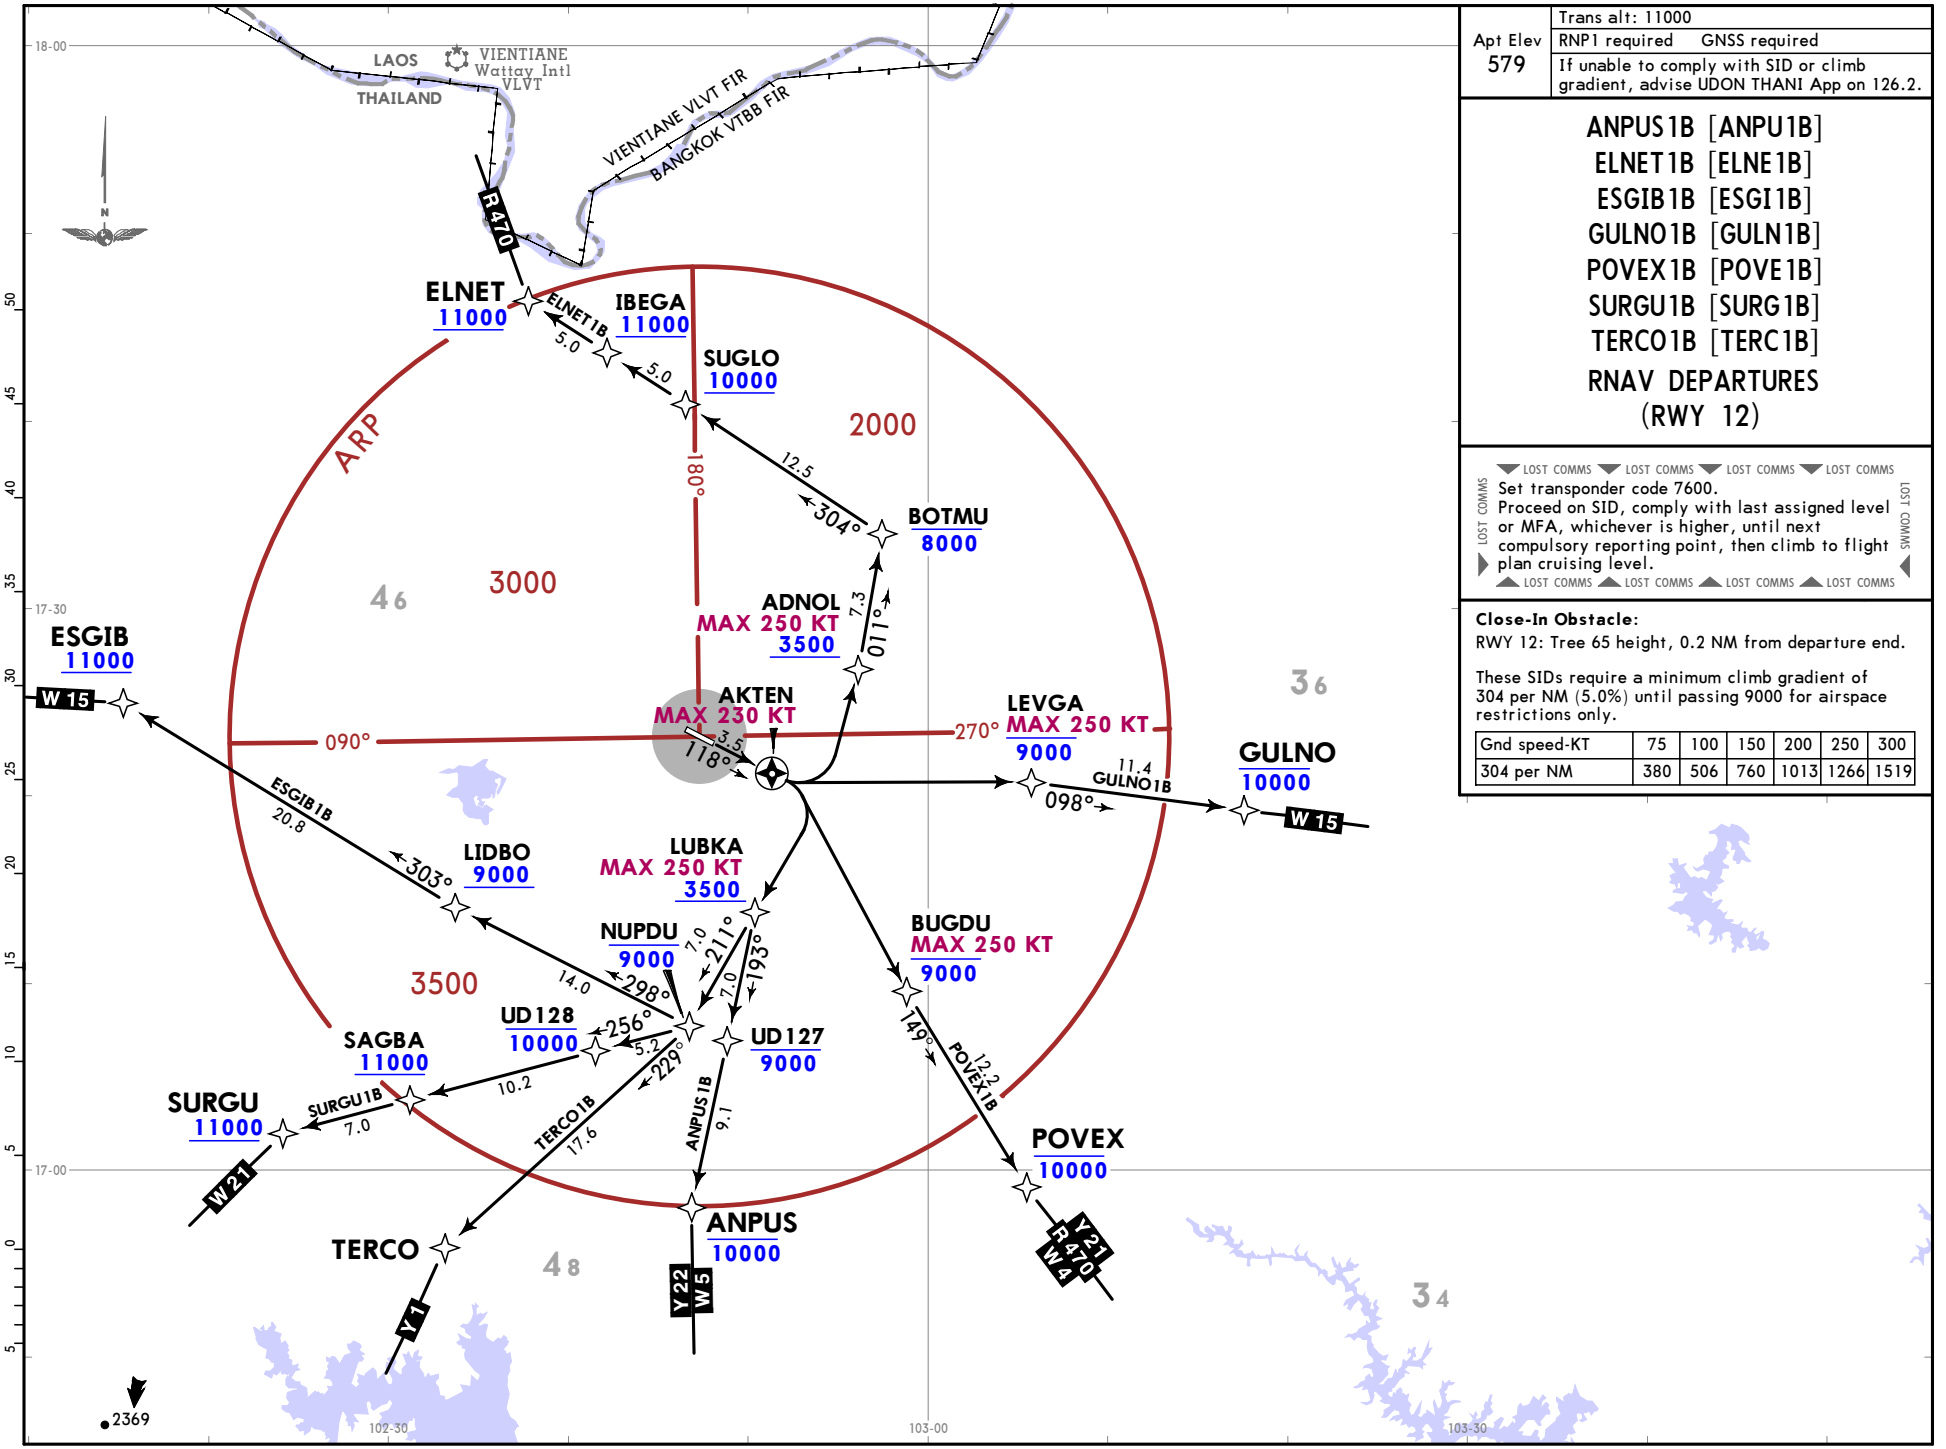

Apt Elev	Trans alt: 11000
579	RNP1 required GNSS required
	If unable to comply with SID or climb gradient, advise UDON THANI App on 126.2.

ANPUS1B [ANPU1B]
ELNET1B [ELNE1B]
ESGIB1B [ESGI1B]
GULNO1B [GULN1B]
POVEX1B [POVE1B]
SURGU1B [SURG1B]
TERCO1B [TERC1B]

RNAV DEPARTURES
(RWY 12)

LOST COMMS LOST COMMS LOST COMMS LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.
LOST COMMS LOST COMMS LOST COMMS LOST COMMS


Close-In Obstacle:
RWY 12: Tree 65 height, 0.2 NM from departure end.

These SIDs require a minimum climb gradient of 304 per NM (5.0%) until passing 9000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
304 per NM	380	506	760	1013	1266	1519

CHANGES: Airways added.

© JEPPESEN, 2021, 2022. ALL RIGHTS RESERVED.

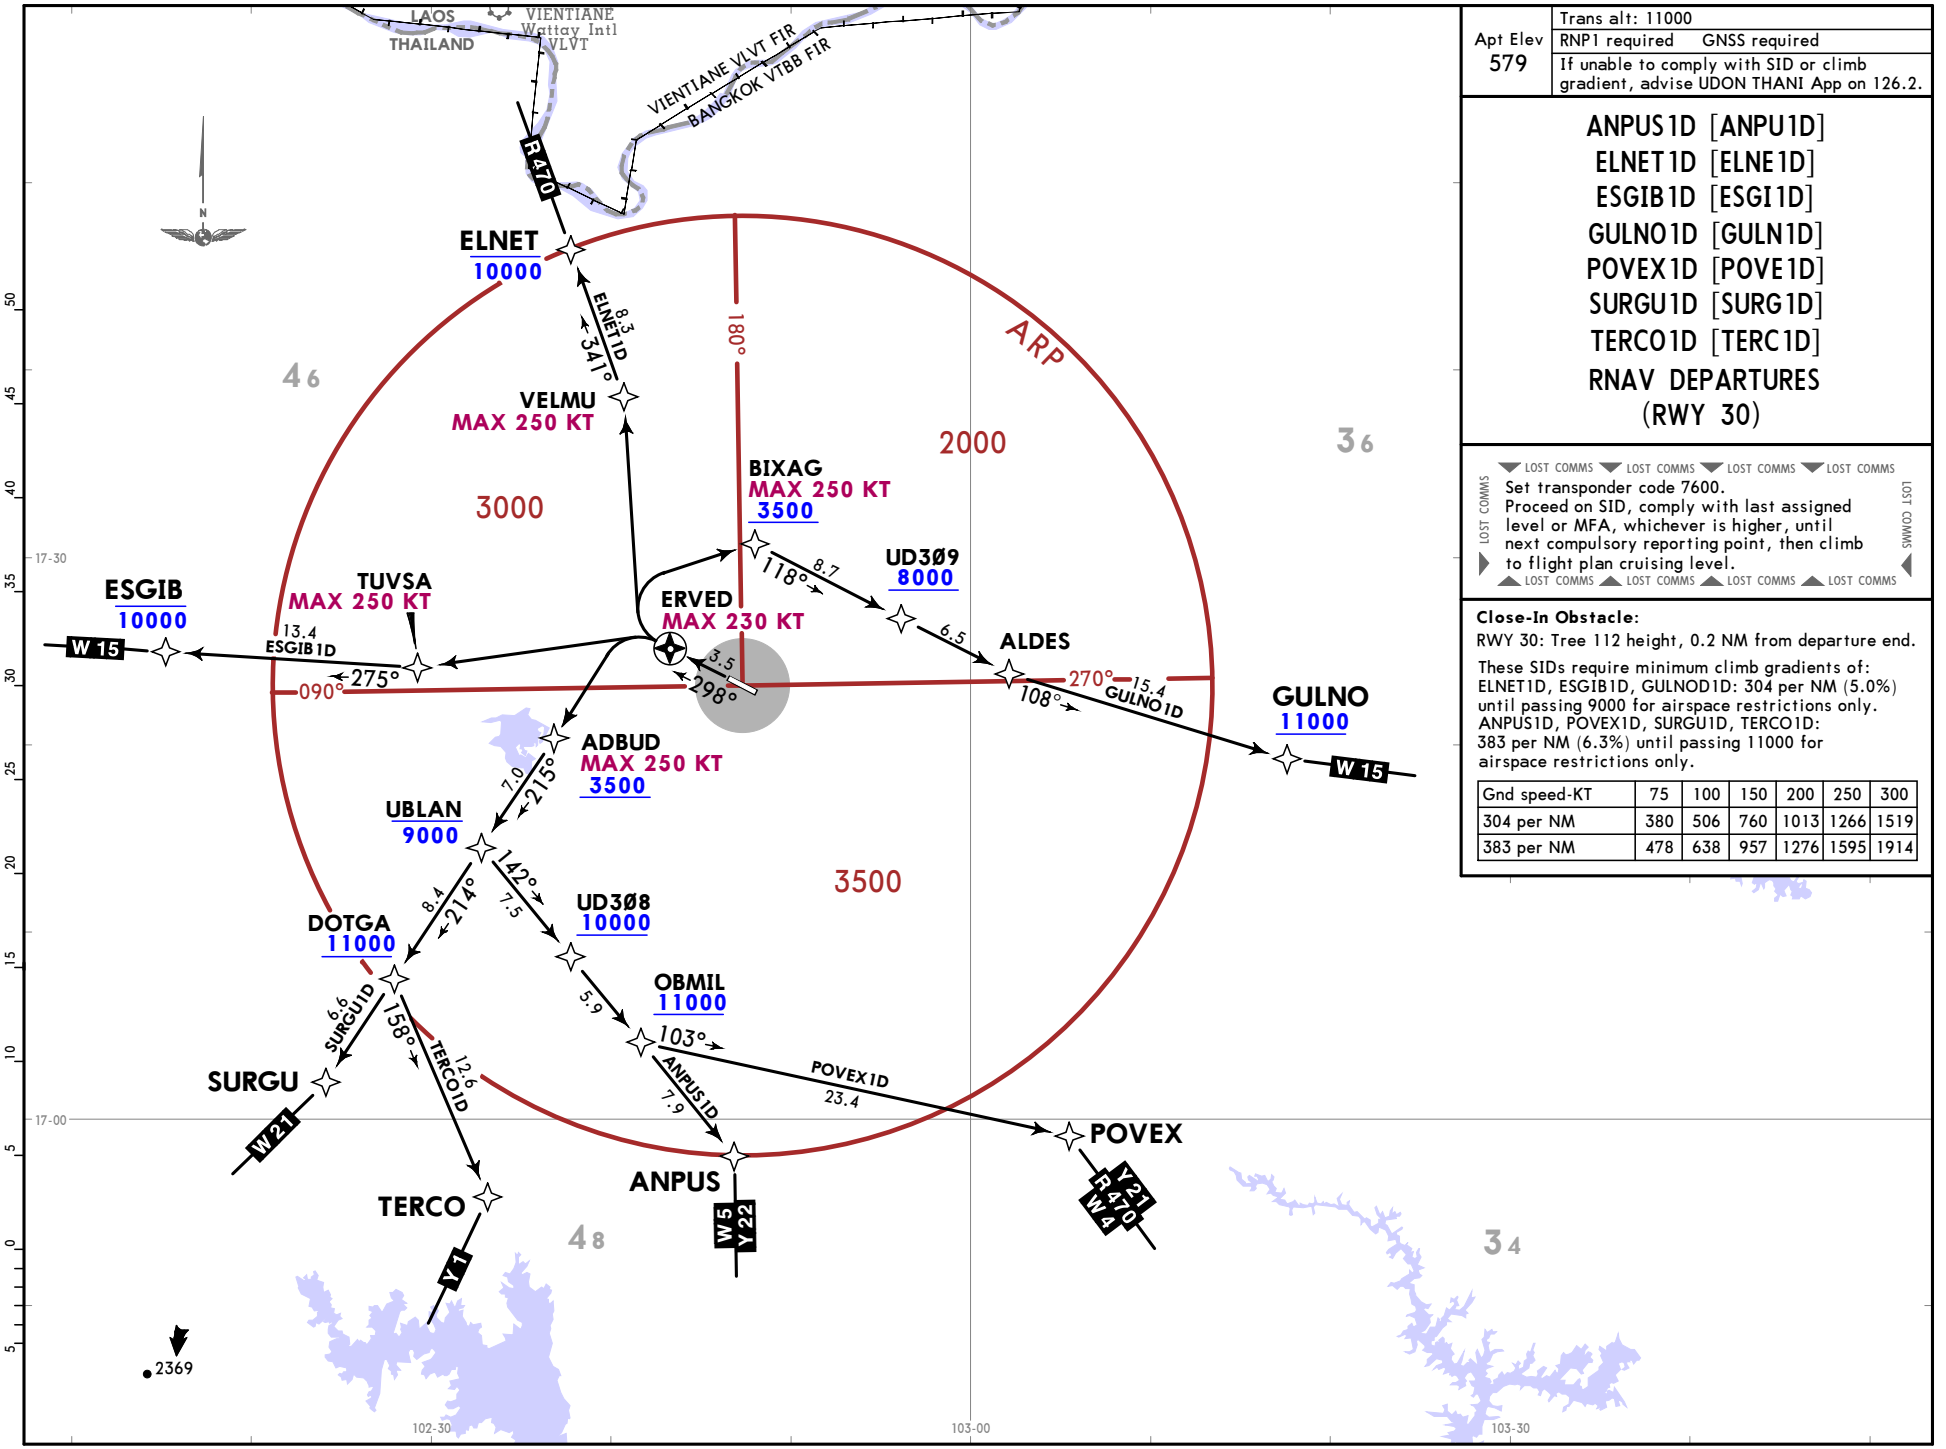

Apt Elev	Trans alt: 11000
579	RNP1 required GNSS required
	If unable to comply with SID or climb gradient, advise UDON THANI App on 126.2.

ANPUS1D [ANPU1D]
ELNET1D [ELNE1D]
ESGIB1D [ESGI1D]
GULNO1D [GULN1D]
POVEX1D [POVE1D]
SURGU1D [SURG1D]
TERCO1D [TERC1D]
RNAV DEPARTURES
(RWY 30)

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

Close-In Obstacle:
RWY 30: Tree 112 height, 0.2 NM from departure end.

These SIDs require minimum climb gradients of:
ELNET1D, ESGIB1D, GULNOD1D: 304 per NM (5.0%) until passing 9000 for airspace restrictions only.
ANPUS1D, POVEX1D, SURGU1D, TERCO1D: 383 per NM (6.3%) until passing 11000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
304 per NM	380	506	760	1013	1266	1519
383 per NM	478	638	957	1276	1595	1914

CHANGES: Airways added.

© JEPPESEN, 2021, 2022. ALL RIGHTS RESERVED.

UDON THANI, THAILAND
RNAV STAR

*ATIS	Apt Elev
127.6	579

Alt Set: hPa Trans level: FL130

RNP1 required GNSS required

ANPUS1A [ANPU1A]
ELNET1A [ELNE1A]
ESGIB1A [ESGI1A]
GULNO1A [GULN1A]
MUGNO1A [MUGN1A]
POVEX1A [POVE1A]
SURGU1A [SURG1A]
RNAV ARRIVALS
(RWY 12)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to TELUG. Commence descent in the TELUG holding as close as EAT or ETA to 3500. Carry out standard instrument approach to RWY 12.

LAOS
THAILAND
VIENTIANE Wattay Intl VLVT
VIENTIANE VLVT FIR
BANGKOK VTBB FIR
R470
M648
OLPES 10000
MUGNO 11000
MUGNO1A 12.9 257°
ELNET 9000
6.8
ARP
180°
2000
3000
3500
TELUG
MAX 230 KT
MHA 3500
118°
298°
(IAF) RUGBU MAX 230 KT 5000
(IAF) LEBOG MAX 230 KT 5000
ELNET1A 16.5 208°
7.0 208°
5.0 118°
DOXUR 10000
16.4 298°
UD125 11000
7.9
GULNO1A 17.0 270° 292°
GULNO 11000
W 15
ESGIB 8000
ESGIB1A 15.6 066°
W 15
(IAF) RIRMI MAX 230 KT 5000
7.0 028°
(IF) TELUG MAX 230 KT 3500
090°
16.4 298°
BEGOL 10000
11.5 028°
MOPSA 8000
7.9
UD126 11000
NUPDU 11000
7.9
11.0 SURGU1A 010°
SURGU 10000
W 21
9.7 ANPUS1A 360°
ANPUS 11000
W 5
Y 22
POVEX1A 16.6 313°
POVEX 11000
Y 21
R 470
W 4
2369
46
36
48
34
18-00
17-30
17-00
102-30
103-00
103-30

CHANGES: Airways added.

© JEPPESEN, 2021, 2022. ALL RIGHTS RESERVED.

UDON THANI, THAILAND

JEPPESEN
15 APR 22 (10-2A) Eff 21 Apr
RNAV STAR

*ATIS	Apt Elev
127.6	579

Alt Set: hPa Trans level: FL130

RNP1 required GNSS required

ANPUS1C [ANPU1C]
ELNET1C [ELNE1C]
ESGIB1C [ESGI1C]
GULNO1C [GULN1C]
MUGNO1C [MUGN1C]
POVEX1C [POVE1C]
SURGU1C [SURG1C]
RNAV ARRIVALS
(RWY 30)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to MUNUR. Commence descent in the MUNUR holding as close as EAT or ETA to 3500. Carry out standard instrument approach to RWY 30.

MUNUR
MAX 230 KT
MHA 3500
118°
298°

LAOS
THAILAND
VIENTIANE
Wattay Intl
VLVT
VIENTIANE VLVT FIR
BANGKOK VTBB FIR
R470
M648
MUGNO
11000
162°
MUGNO1C
22.2
ELNET
11000
127°
ELNET1C
16.0
180°
PAMVO
11000
118°
15.2
SAPUR
7000
7.0
208°
ARP
3000
2000
4 6
3 6
1 1 6
8 9
ESGIB
11000
W 15
106°
ESGIB1C
15.9
090°
UD3Ø7
11000
270°
(IAF)
ALDES
MAX 230 KT
5000
MOSDI
10000
10.0
118°
15.2
(IF)
MUNUR
MAX 230 KT
3500
7.0
GULNO
8000
W 15
GULNO1C
14.1
255°
5.0
298°
(IAF)
LATUR
MAX 230 KT
5000
7.0
028°
3500
(IAF)
OTLOR
MAX 230 KT
5000
7.0
033°
POVEX1C
16.2
SURGU
10000
W21
11.0
SURGU1C
084°
15.5
VEKVA
9000
8.6
ANPUS1C
033°
EMTER
354°
POVEX
10000
ANPUS
10000
W5
Y22
R470
W4
Y21
3 4
4 8
2369
18-00
17-30
17-00
102-30
103-00
103-30

CHANGES: Airways added.

© JEPPESEN, 2021, 2022. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN

9 MAY 25 (11-2) Eff 15 May

UDON THANI, THAILAND
ILS or LOC Y Rwy 30

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9


BRIEFING STRIP ™

LOC IUDN	Final Apch Crs	UD305	ILS DA(H) Refer to Minimums	Apt Elev 579′ Rwy 579′
110.1	298°	2500′ (1921′)		


MISSED APCH: Climb STRAIGHT AHEAD to 1500′, then turn RIGHT to intercept outbound R-116 UDN VOR, then proceed to MUNUR at minimum 3500′ and hold or as directed by ATC. No turn before MAP (for LOC only).

Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL130 | Trans alt: 11000′

VOR, DME required.

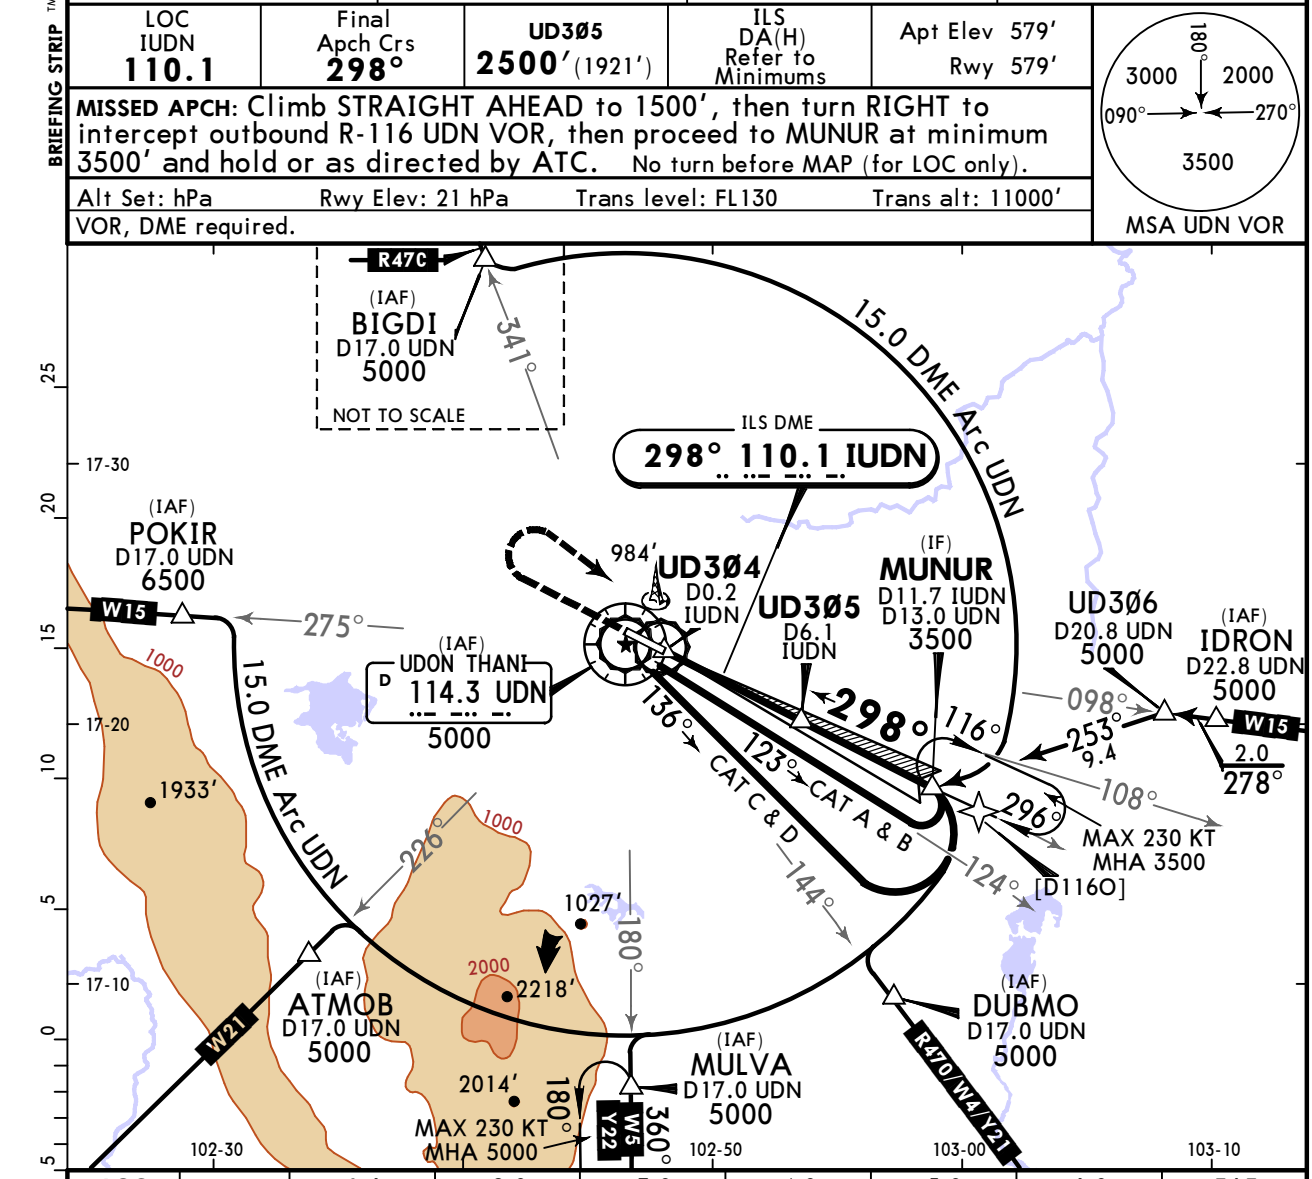

LOC (GS out)	IUDN DME	1.6	2.0	3.0	4.0	5.0	6.0	FAF
	ALTITUDE	1070′	1200′	1515′	1830′	2145′	2460′	2500′

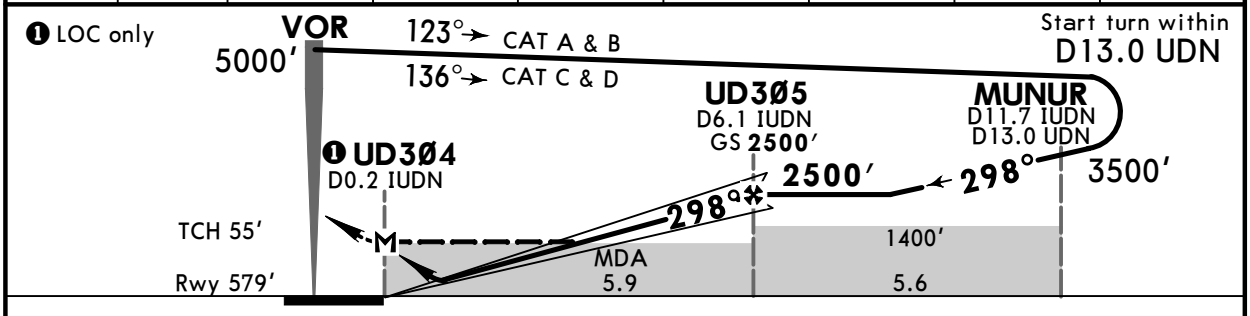

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at UD304							

SALS | PAPI | 1500′ | RT | UDN 114.3 R-116


PANS OPS

State — STRAIGHT-IN LANDING

	ILS DA(H)		LOC (GS out) CDFA ❶ DA/MDA(H)	
	A: 860′ (281′)	C: 880′ (301′)	1070′ (491′)	
	B: 870′ (291′)	D: 890′ (311′)		
		ALS out		ALS out
A	R1000m	R1400m	R1500m	R1500m
B				
C			R1800m	R2300m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1300′ (721′) V1500m
135	1300′ (721′) V1600m
180	1300′ (721′) V2400m
205	1300′ (721′) V3600m



❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: None.

© JEPPESEN, 2002, 2024. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN 9 MAY 25 (11-1) Eff 15 May

UDON THANI, THAILAND
ILS or LOC Z Rwy 30

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9

BRIEFING STRIP ™


LOC IUDN	Final Apch Crs	UD3Ø5 MANDATORY	ILS DA(H) Refer to Minimums	Apt Elev 579′ Rwy 579′
110.1	298°	2500′ (1921′)		

MISSED APCH: Climb on track 298° to 1500′, then turn RIGHT direct to OSPEK. Continue to ALDES, then proceed to MUNUR at minimum 3500′ and hold or directed by ATC. No turn before MAP.


Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL130 | Trans alt: 11000′

RNP1 required


1. GNSS required. 2. DME required.



MSA UDN VOR

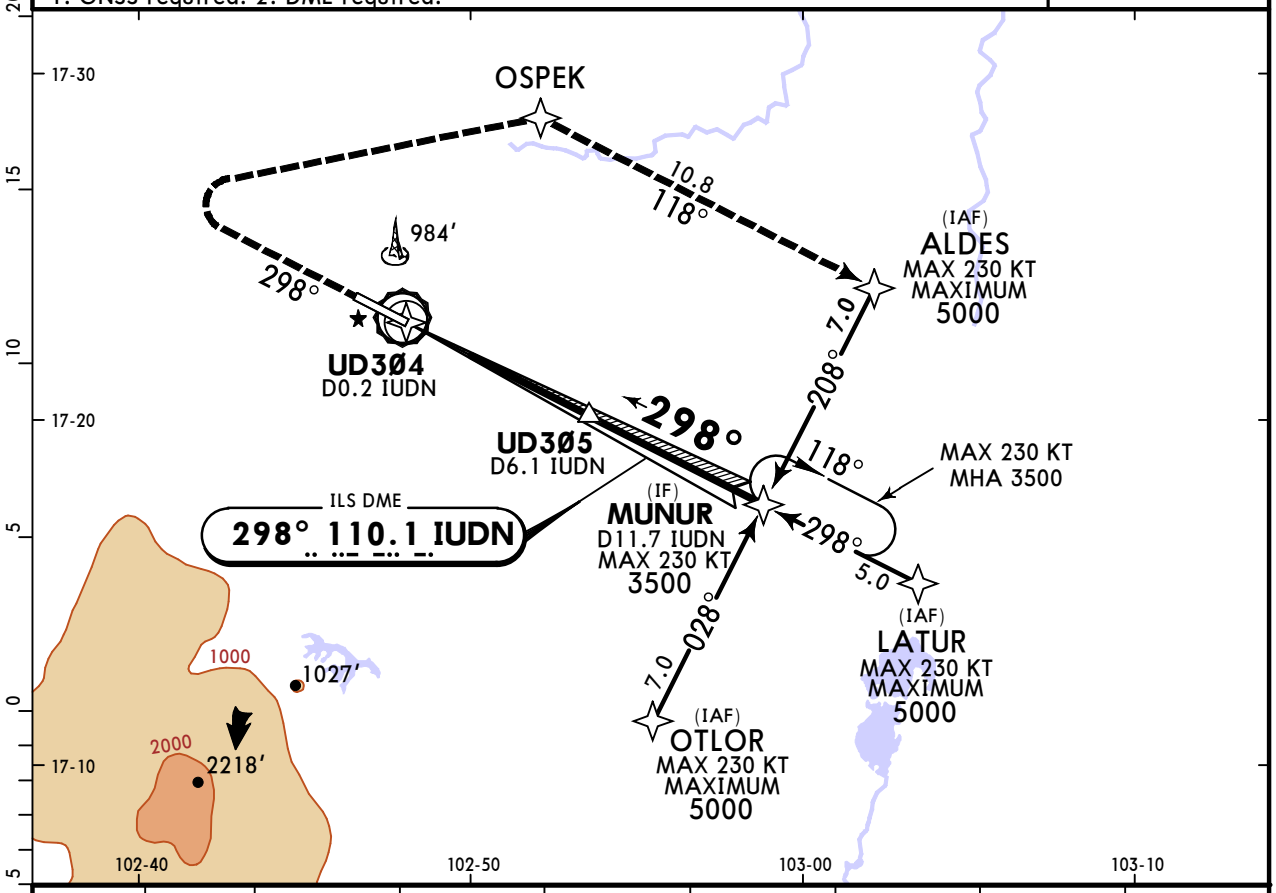

LOC (GS out)	IUDN DME	1.6	2.0	3.0	4.0	5.0	6.0	FAF
	ALTITUDE	1070′	1200′	1515′	1830′	2145′	2460′	2500′

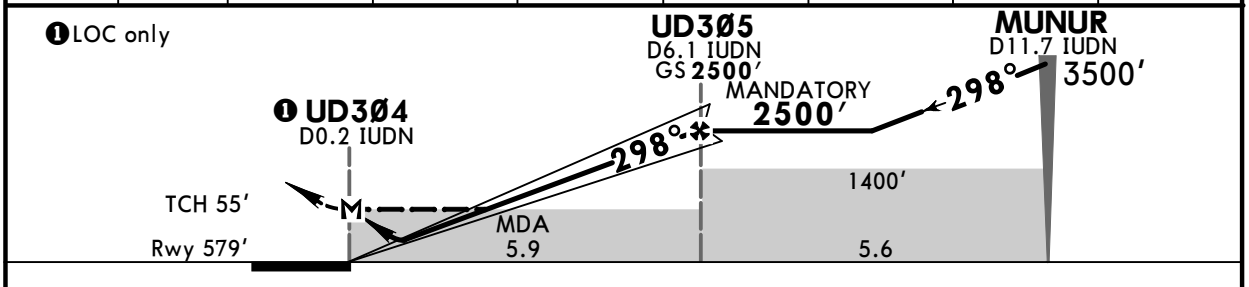

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at UD3Ø4							

SALS
PAPI
1500′ on 298°

State

STRAIGHT-IN LANDING

ILS

DA(H) A: **860′** (281′) C: **880′** (301′)
B: **870′** (291′) D: **890′** (311′)


LOC (GS out)

CDFA
❶ DA/MDA(H)
1070′ (491′)

CIRCLE-TO-LAND

	ILS		LOC (GS out)	
	ALS out		ALS out	
A	R1000m	R1400m	R1500m	R1500m
B				
C			R1800m	R2300m
D				

Max Kts	MDA(H)
100	1300′ (721′) V1500m
135	1300′ (721′) V1600m
180	1300′ (721′) V2400m
205	1300′ (721′) V3600m



PANS OPS

❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: UD3Ø4 changed to fly over.

© JEPPESEN, 2021, 2025. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN


22 JAN 21 (12-1) Eff 28 Jan

UDON THANI, THAILAND
RNP Rwy 12

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9

BRIEFING STRIP ™

RNAV	Final Apch Crs	UD124 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 579′
	118°	2500′(1921′)	990′(411′)	Rwy 579′




MSA ARP


MISSED APCH: Climb on track 118° to 1500′, then turn LEFT direct to ENGEB. Continue to RUGBU, then proceed to TELUG at minimum 3500′ and hold or directed by ATC. No turn before MAP.

RNP Apch | Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL 130 | Trans alt: 11000′

Baro-VANV not authorized below 10°C.

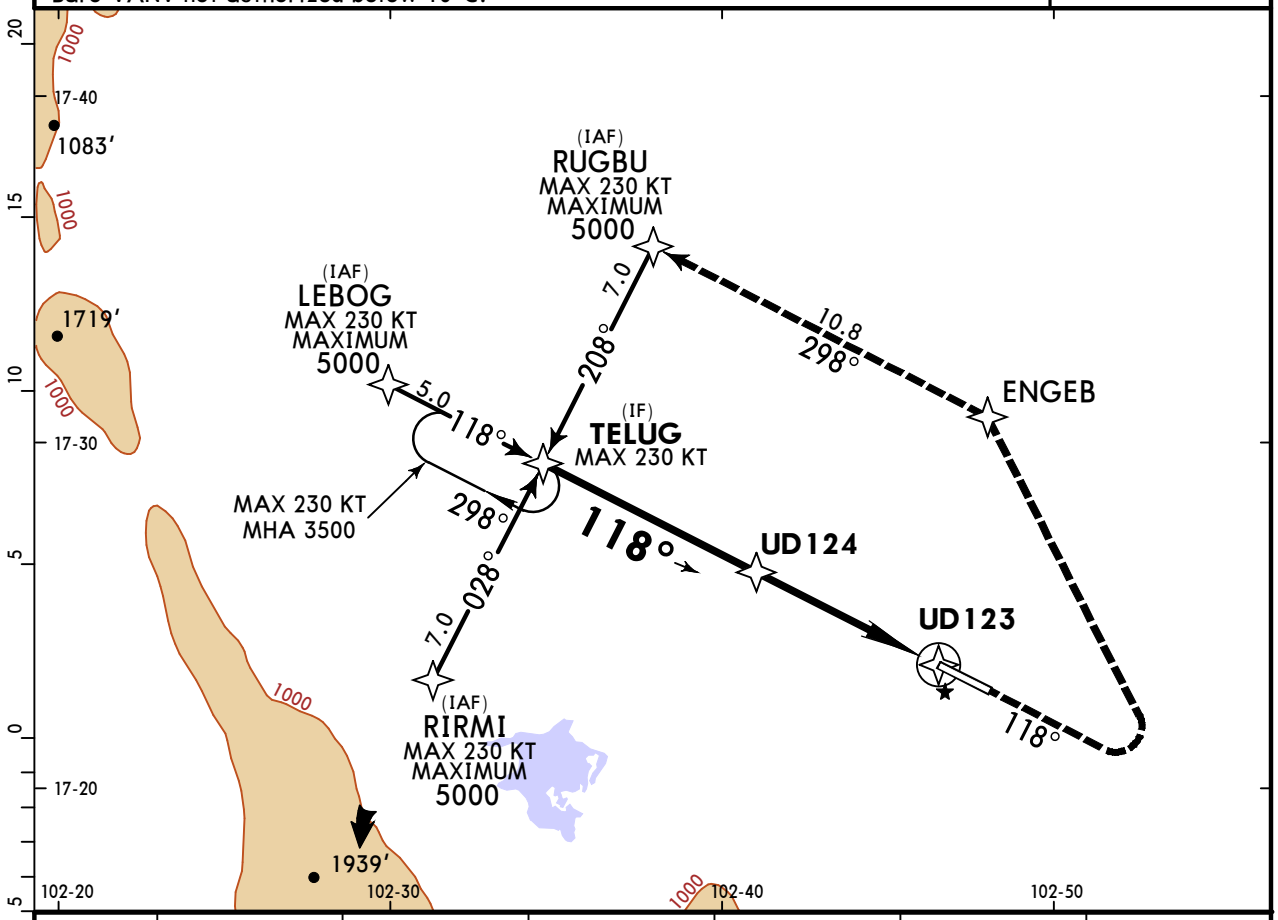

NM to THR	FAF	5.0	4.0	3.0	2.0	1.9
ALTITUDE	2500′	2210′	1895′	1575′	1260′	1230′

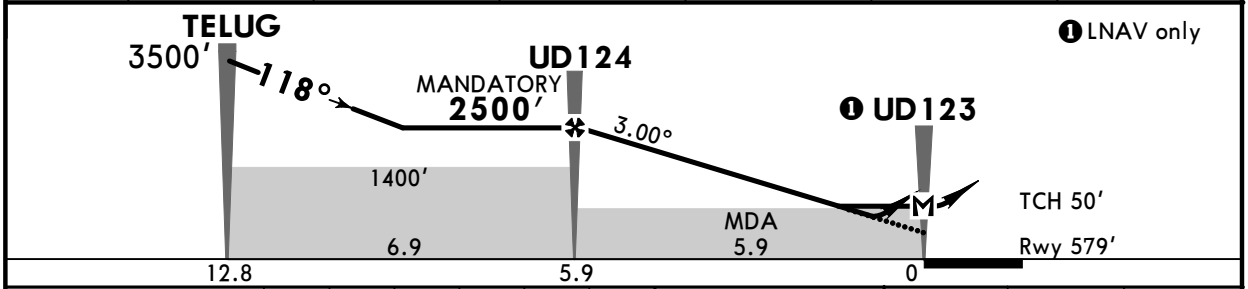

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
LNAV/VNAV: MAP at DA							
LNAV: MAP at UD123							



1500′ on 118°


PANS OPS

Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 990′(411′)		LNAV CDFA 1 DA/MDA(H) 1230′(651′)	
		ALS out		ALS out
A	R1500m	R1500m	R1500m	R1500m
B				
C		R1900m	R2400m	R2400m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1300′(721′) V1500m
135	1300′(721′) V1600m
180	1300′(721′) V2400m
205	1300′(721′) V3600m



1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure, minimums.

© JEPPESEN, 2012, 2021. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN

22 JAN 21 (12-2) Eff 28 Jan

UDON THANI, THAILAND
RNP Rwy 30

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9


BRIEFING STRIP ™

RNAV	Final Apch Crs	UD3Ø5 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 579′
	298°	2500′(1921′)	1140′(561′)	Rwy 579′


MISSED APCH: Climb on track 298° to 1500′, then turn RIGHT direct to OSPEK. Continue to ALDES, then proceed to MUNUR at minimum 3500′ and hold or directed by ATC. No turn before MAP.

RNP Apch | Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL 130 | Trans alt: 11000′


Baro-VANV not authorized below 10°C.



MSA ARP

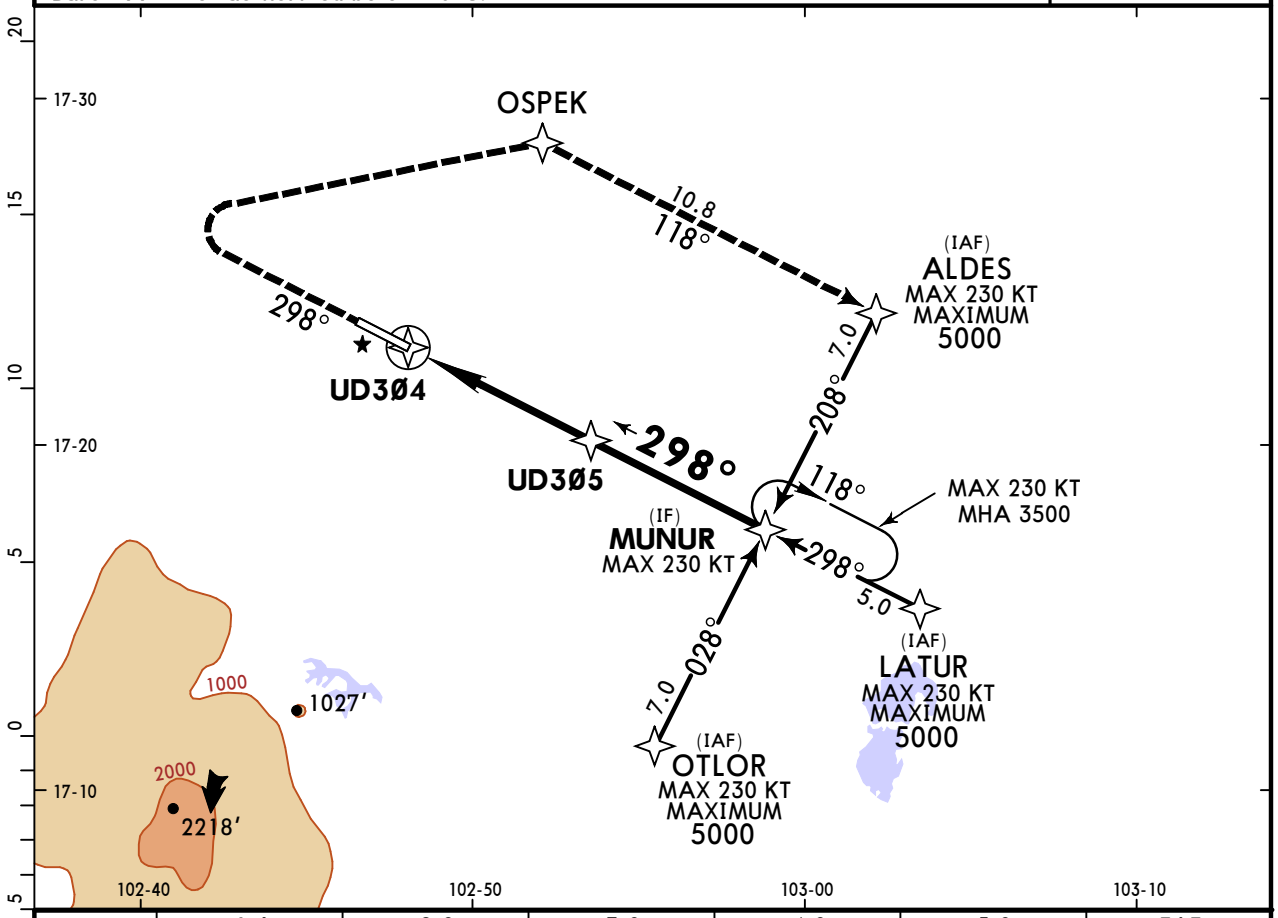

NM to THR	1.6	2.0	3.0	4.0	5.0	FAF
ALTITUDE	1140′	1260′	1575′	1895′	2210′	2500′

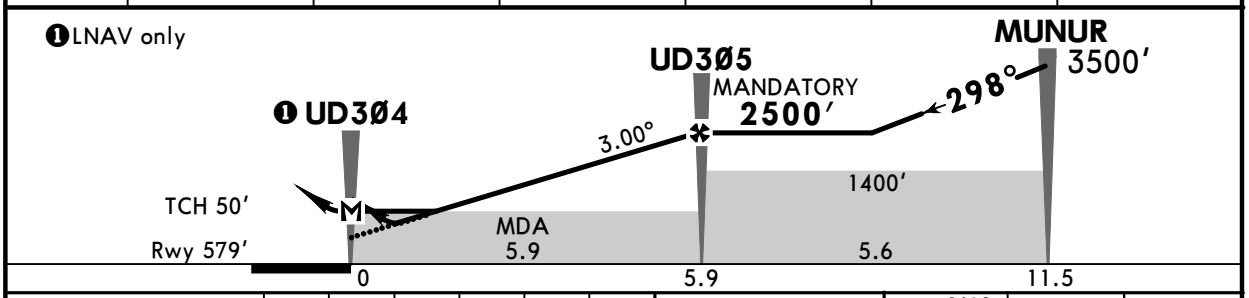

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
LNAV/VNAV: MAP at DA							
LNAV: MAP at UD3Ø4							


SALS
PAPI
1500′ on 298°

Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 1140′(561′)		LNAV CDFA ❶ DA/MDA(H) 1140′(561′)	
		ALS out		ALS out
A	R1500m	R1500m	R1500m	R1500m
B				
C	R2200m	R2400m	R2200m	R2400m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1300′(721′) V1500m
135	1300′(721′) V1600m
180	1300′(721′) V2400m
205	1300′(721′) V3600m



PANS OPS

❶ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure, minimums.

© JEPPESEN, 2012, 2021. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN 9 MAY 25 (13-1) Eff 15 May

UDON THANI, THAILAND
VOR Rwy 12

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9


BRIEFING STRIP ™

VOR UDN	Final Apch Crs	UD121	DA/MDA(H)	Apt Elev 579′
114.3	126°	2500′(1921′)	1100′(521′)	Rwy 579′


MISSED APCH: Climb STRAIGHT AHEAD to 1500′, then turn LEFT to intercept outbound R-306 UDN VOR, then proceed to UD122 at minimum 3500′ and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.



MSA UDN VOR

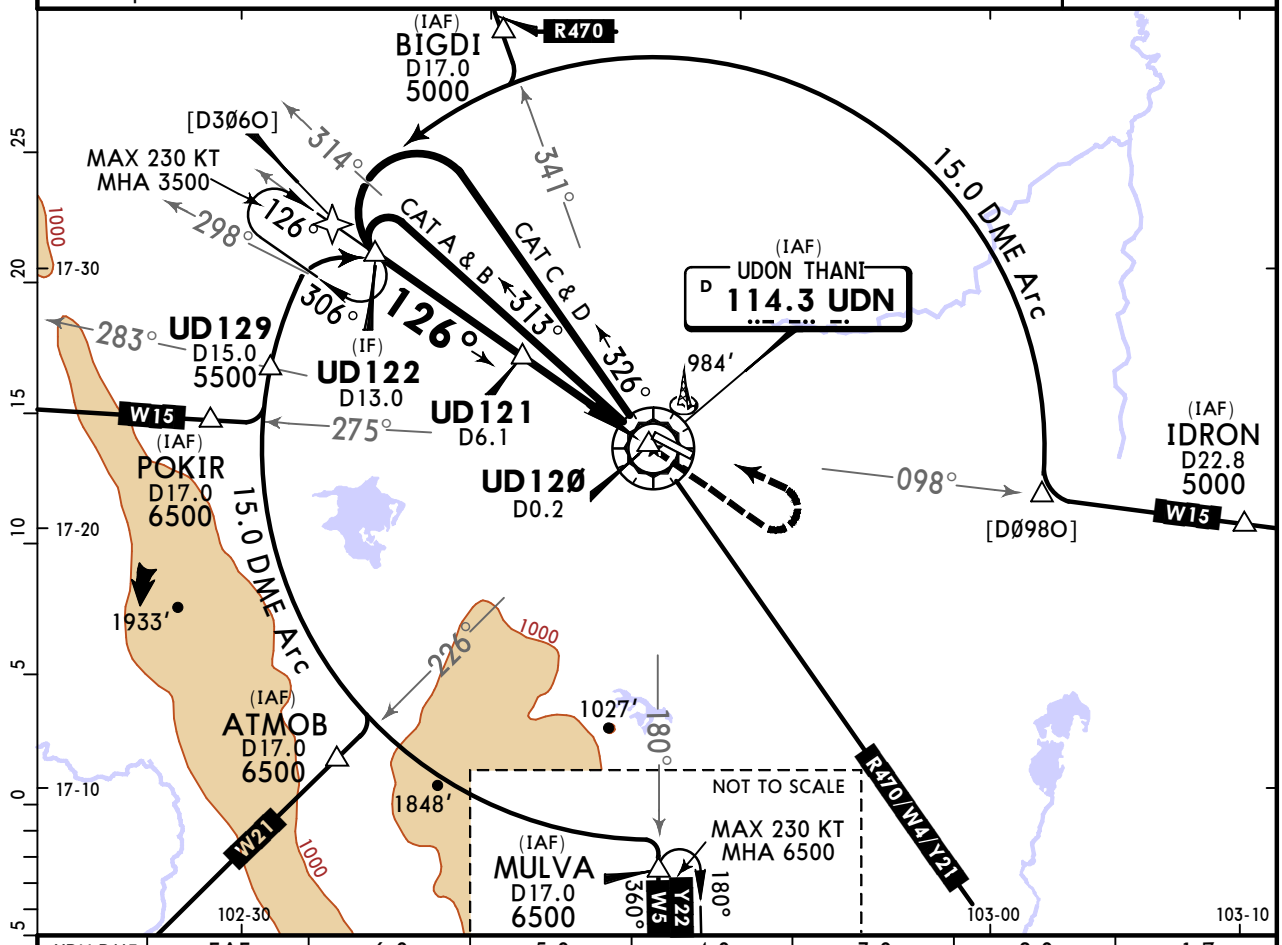

UDN DME	FAF	6.0	5.0	4.0	3.0	2.0	1.7
ALTITUDE	2500′	2460′	2145′	1830′	1515′	1200′	1100′

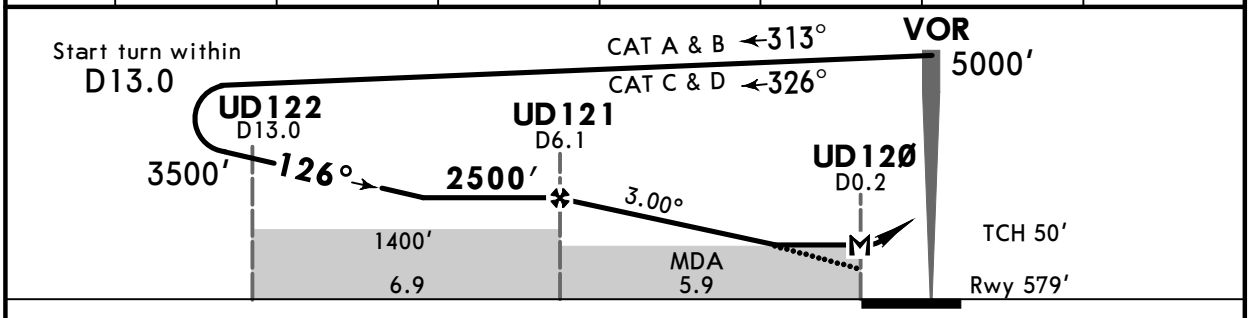

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at UD12Ø							

SALS PAPI 1500′ LT

UDN 114.3 R-306

Std STRAIGHT-IN LANDING


CDFA

1 DA/MDA(H) 1100′(521′)

	ALS out
A	R1500m
B	R1500m
C	R2000m
D	R2400m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1300′(721′) V1500m
135	1300′(721′) V1600m
180	1300′(721′) V2400m
205	1300′(721′) V3600m



PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Waypoint name UD129 added.

© JEPPESEN, 2002, 2025. ALL RIGHTS RESERVED.

VTUD/UTH
UDON THANI

JEPPESEN 9 MAY 25 (13-2) Eff 15 May

UDON THANI, THAILAND
VOR Rwy 30

*ATIS	*UDON Approach	*UDON Tower	*Ground
127.6	126.2	122.5	121.9


BRIEFING STRIP ™

VOR UDN	Final Apch Crs	UD3Ø1	DA/MDA(H)	Apt Elev 579′
114.3	292°	2500′(1921′)	1070′(491′)	Rwy 579′


MISSED APCH: Climb STRAIGHT AHEAD to 1500′, then turn RIGHT to intercept outbound R-112 UDN VOR, then proceed to UD3Ø2 at minimum 3500′ and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa | Rwy Elev: 21 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.



MSA UDN VOR

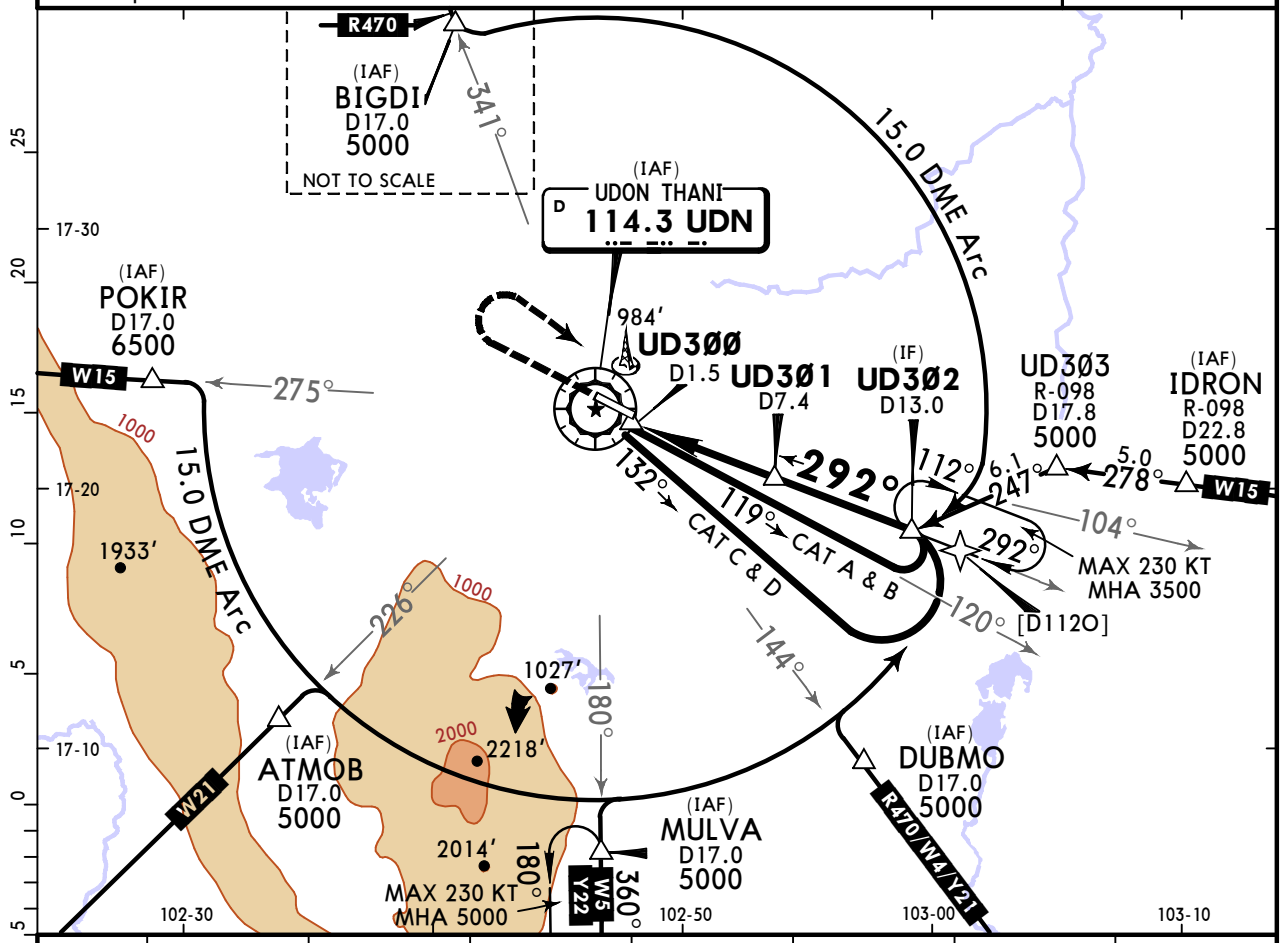

UDN DME	2.9	3.0	4.0	5.0	6.0	7.0	FAF
ALTITUDE	1070′	1100′	1420′	1735′	2050′	2365′	2500′

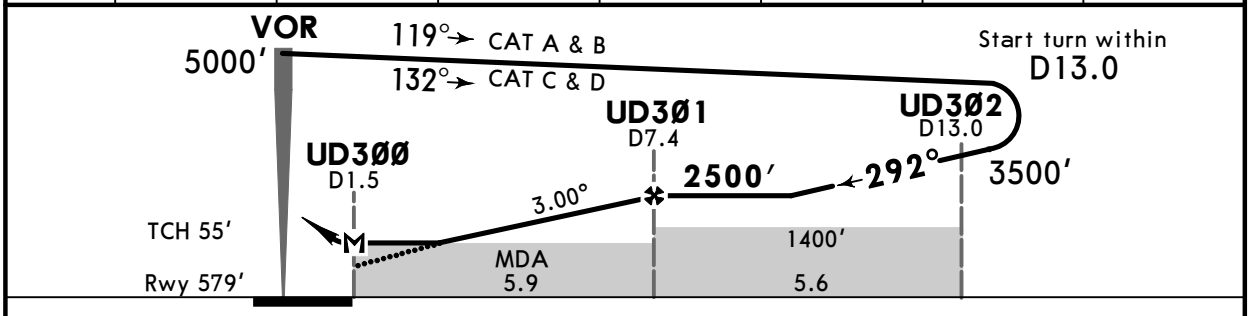

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at UD3ØØ							

SALS PAPI 1500′ RT

UDN 114.3 R-112

Std STRAIGHT-IN LANDING


CDFA

1 DA/MDA(H) 1070′(491′)

	ALS out	
A	R1500m	R1500m
B		
C	R1800m	R2300m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1300′(721′) V1500m
135	1300′(721′) V1600m
180	1300′(721′) V2400m
205	1300′(721′) V3600m



PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: None.

© JEPPESEN, 2002, 2024. ALL RIGHTS RESERVED.