
VTUN — JEPPESEN NAKHON RATCHASIMA, THAILAND

Apt Elev **729′**
N14 56.1 E102 04.7

4 JUL 25 (20-9) **Eff 10 Jul**

KHORAT

*ATIS		KHORAT Ground		Tower		KHORAT Departure (R)	
390.6	134.8	121.75	257.8	122.2	240.5	134.1	285.0

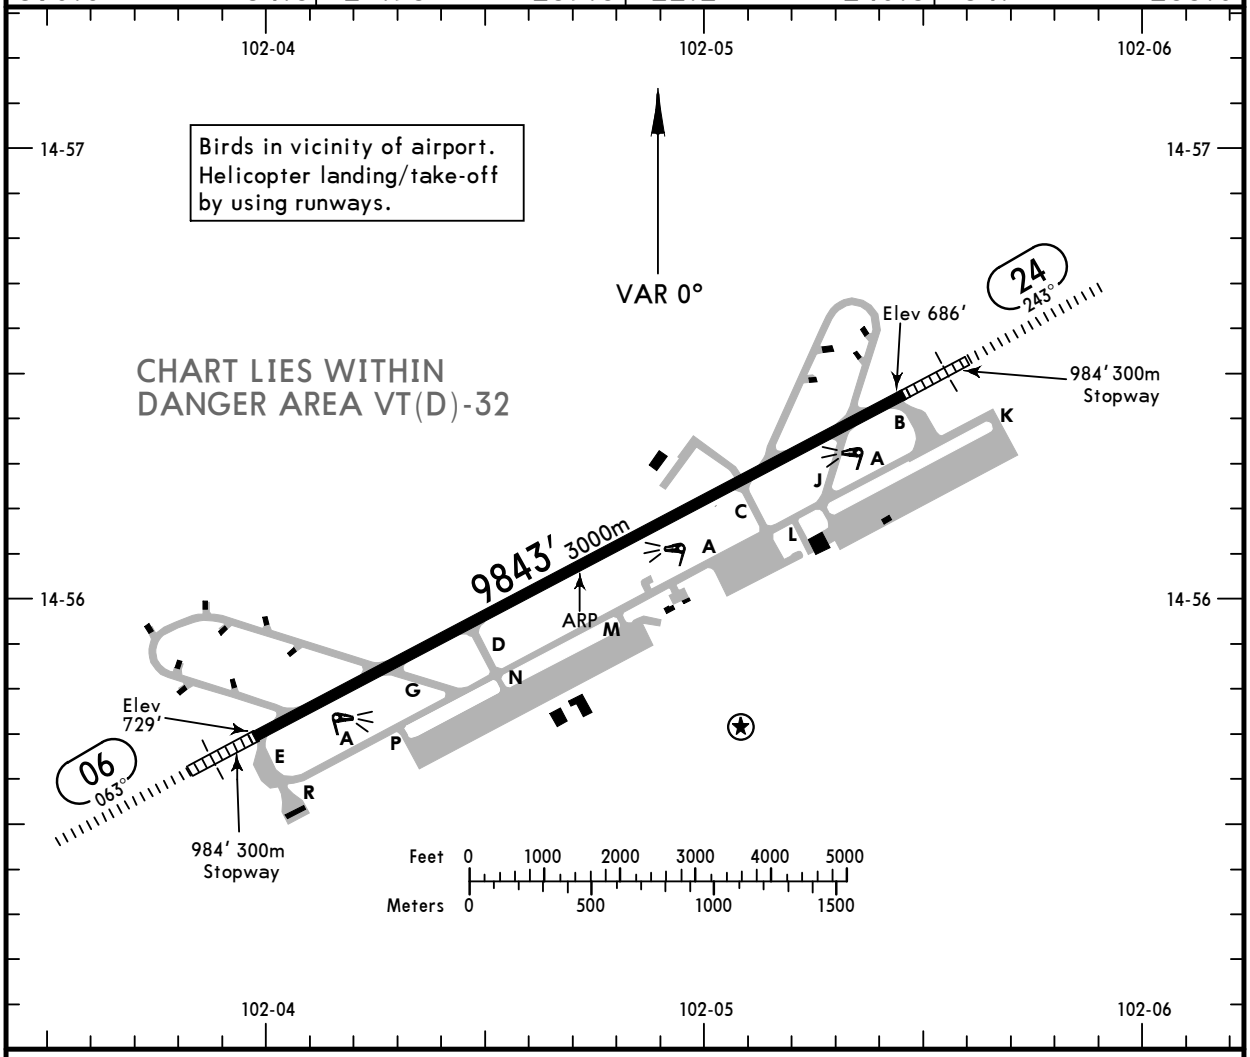

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND: Threshold	Glide Slope	TAKE-OFF	WIDTH
06	HIRL(45m) ❶PALS CAT I ❷PAPI			❹	148′ 45m
24	HIRL(45m) ❶PALS CAT I ❸PAPI		9066′ 2763m		

❶ length 900m
❷ (angle 3.0°, MEHT 53′)
❸ (angle 3.0°, MEHT 66′)

❹ INTERSECTION TAKE-OFF POSITIONS & DISTANCES

RUNWAY	FROM TAXIWAY	RUNWAY REMAINING	RUNWAY	FROM TAXIWAY	RUNWAY REMAINING
06	G	8373′ (2552m)	24	J	8471′ (2582m)
	D	6398′ (1950m)		C	7290′ (2222m)

Std TAKE-OFF

❶ RL & RCLM	❶ RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA

❶ For NIGHT operations, at least RL and RENL are required.

CHANGES: Lights, ABN, WDI, helicopter note, additional runway information.

© JEPPESEN, 2008, 2025. ALL RIGHTS RESERVED.

1. GENERAL

1.1 ATIS

*ATIS 134.8, 390.6

1.2 AERODROME TRAFFIC CIRCUIT

Using both sides of traffic circuit.

1.2.1 Overhead pattern

Fly initial at 300 KT. Pattern and Break altitude is 2200′ MSL. The standard break is:

- Using Rwy 06 by Right turn pattern.
- Using Rwy 24 by Left turn pattern.

1.2.2 Straight-in pattern

Request a straight-in upon contact with Korat Approach and reiterate your request with Korat Tower when transferred to the tower frequency. Be at 1700′ MSL by 6 NM.

1.2.3 Re-entry pattern

The re-entry pattern altitude is 2700′ MSL. Proceed to the 6 NM initial or closed traffic pattern as directed by Korat Tower.

1.2.4 Closed traffic pattern

Do not climb above 1700′ MSL before the turn to downwind. Mid-field and present position closed patterns are authorized with Korat Tower approval.

2. ARRIVAL

2.1 RADIO COMMUNICATIONS FAILURE PROCEDURE

All attempts should be made to have radio-capable aircraft bring/chase NORDO aircraft home.
If no chase ship is available, follow the single-ship recovery procedures below:

- Intercept KRT VOR R-330 or R-150 at 10 DME 1700′ MSL then proceeded inbound.
- Hold at 3-5 DME until the active runway can be determined.
- Join appropriate downwind at 7 NM initial.
- Fly low approach between runway and taxiway at 1300′ MSL, rock wings.
- Pitchout at departure end, establish landing configuration, and check mobile control or tower for the green light on downwind and/or on final.
- After landing, taxi clears off the runway and waits for the Follow Me vehicle.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

VTUN
KHORAT

JEPPESEN

4 JUL 25 (21-1) Eff 10 Jul

NAKHON RATCHASIMA, THAILAND
ILS or LOC Rwy 24


*ATIS		KHORAT Approach (R)		KHORAT Tower		Ground	
390.6	134.8	129.75	349.0	122.2	240.5	121.75	257.8

LOC IKRT	Final Apch Crs	D7.3 IKRT	ILS DA(H)	Apt Elev 729′
109.9	243°	3000′ (2314′)	900′ (214′)	Rwy 686′


MISSED APCH: Climb STRAIGHT AHEAD to 2600′, then turn LEFT to intercept R-049 KRT VOR and proceed to YARMO at 4000′ and hold or as directed by ATC. **No turn before MAP for LOC only.**

Alt Set: hPa | Rwy Elev: 25 hPa | Trans level: FL 130 | Trans alt: 11000′


1. VOR & DME Required.
2. PAPI not coincident with ILS GS starting from 0.8 DME or 900′.



MSA KRT VOR

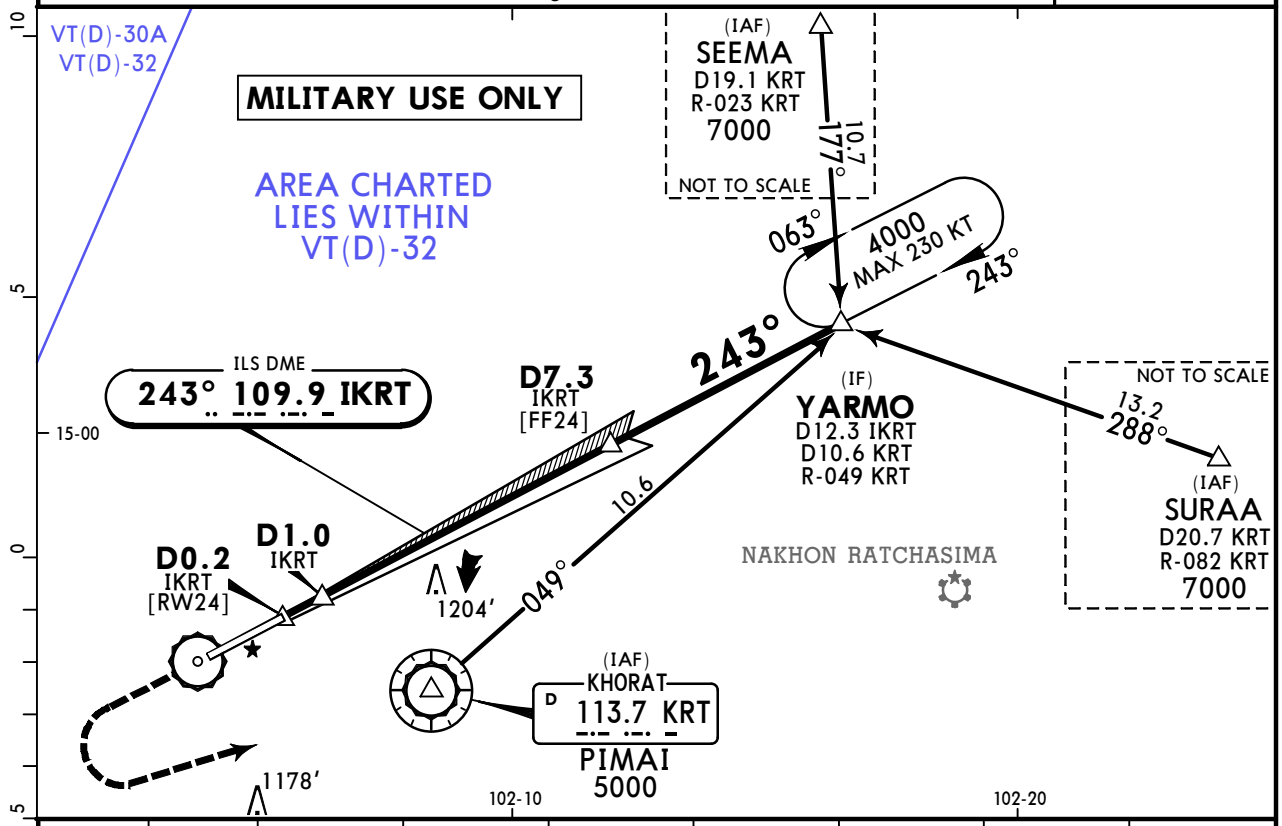

LOC (GS out)	IKRT DME	1.0	2.0	3.0	4.0	5.0	6.0	7.3
	ALTITUDE	990′	1305′	1620′	1935′	2255′	2570′	3000′

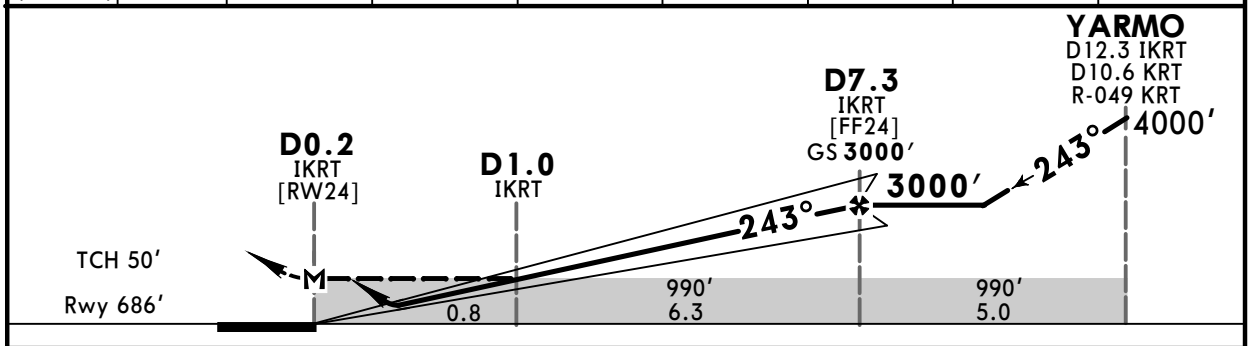

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at D0.2 IKRT							

PALS CAT I
PAPI PAPI
2600′
LT
KRT 113.7 R-049

Std

STRAIGHT-IN LANDING				CIRCLE-TO-LAND	
ILS		LOC (GS out) CDFA			
DA(H) 900′ (214′)		1 DA/MDA(H) 990′ (304′)		Max Kts	MDA(H)
	ALS out		ALS out		
A	R750m	R1200m	R750m	R1400m	100 1400′ (671′) V1500m
B					135 1400′ (671′) V1600m
C					180 1700′ (971′) V2400m
D					205 1700′ (971′) V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

PANS OPS

CHANGES: ABN, lighting, visibility.

© JEPPESEN, 2016, 2025. ALL RIGHTS RESERVED.