
*ATIS	*UBON Ground	*Tower	*UBON Departure (R)
128.2	121.9	119.9	134.1

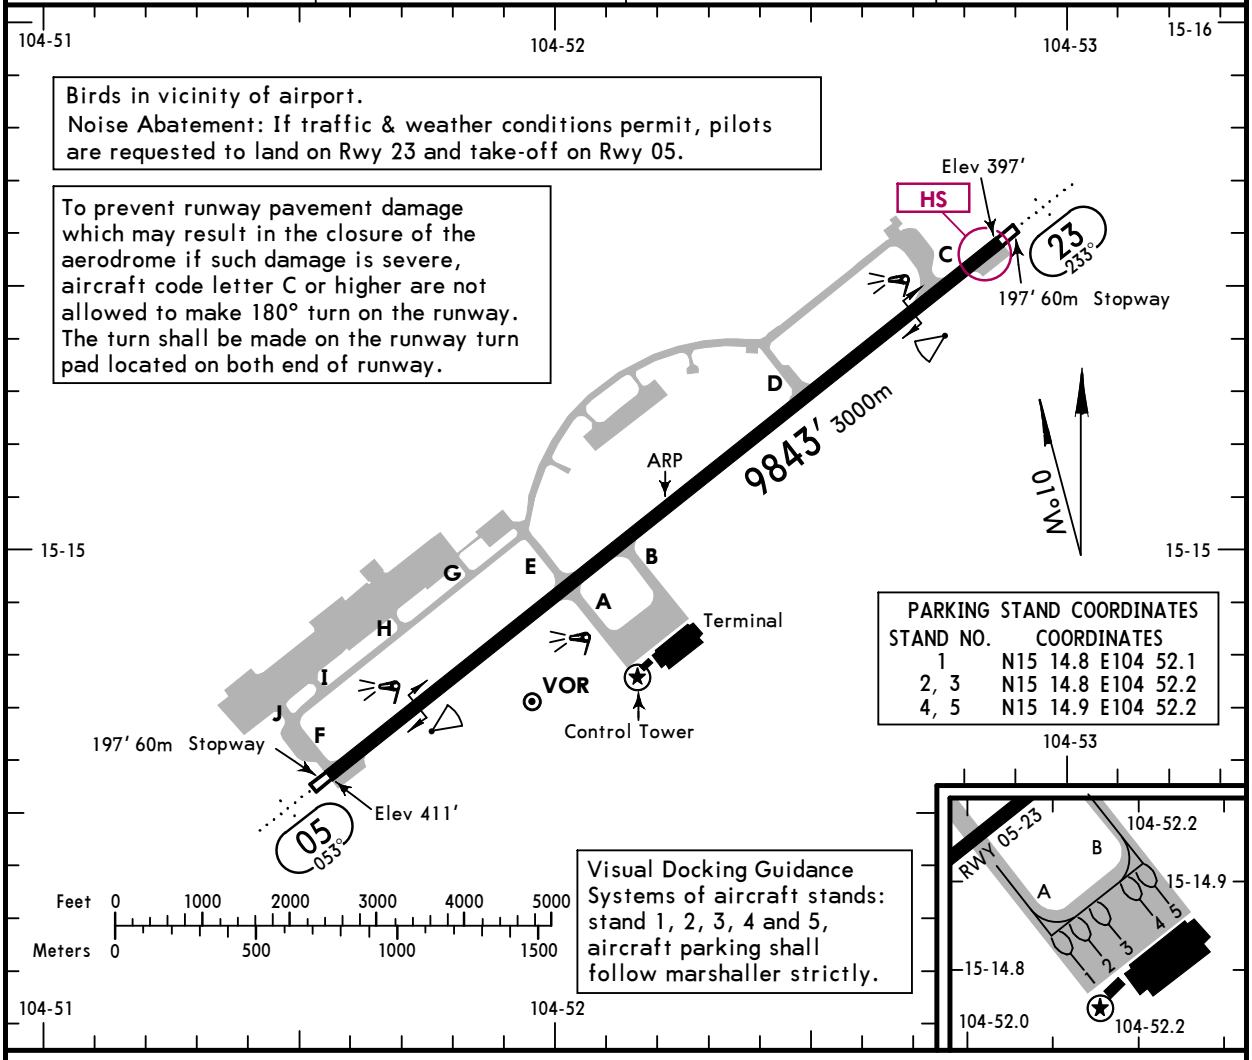

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND — Threshold	Glide Slope	TAKE-OFF	WIDTH
05	HIRL (60m) ❶ SALS(LIH) ❸PAPI-L (angle 3.0°) RVR				148′ 45m
23	HIRL (60m) ❷ SALS(LIH) ❹PAPI-L (angle 3.0°) RVR		8899′2712m		

❶ length 420m
❷ length 407m
❸MEHT 54′
❹MEHT 49′

HOT SPOTS

HS

For information only, not to be construed as ATC instructions.

HS Partially invisible by Tower.

Std TAKE-OFF

[1] RL & RCLM	[1] RL or RCLM	Adequate Vis Ref DAY	Adequate Vis Ref NIGHT
R/V300m	R/V400m	R/V500m	NA

[1] For NIGHT operations, at least RL or CL and RENL are required.

CHANGES: NDB removed.

© JEPPESEN, 2004, 2025. ALL RIGHTS RESERVED.

ROAD CONSTRUCTION FROM FIRE STATION TO RUNWAY 05/23 AT UBON RATCHATHANI AIRPORT (SUP B 006/26 AIRAC)

1. INTRODUCTION


With effect from 19 February 2026 at 0000 UTC to 31 July 2026 at 2200 UTC this chart is to inform all concerned of the road construction from fire station to Rwy 05/23 at Ubon Ratchathani Airport.

2. DETAILS

The construction works at Ubon Ratchathani Airport include the road construction from fire station to Rwy 05/23, revision width extension of strip at Twy A and Twy B and Airfield Lighting Systems Revision.

3. VALIDITY

This chart will remain current until 31 July 2026 at 2200 UTC. Any changes or postponements to this chart will be notified through NOTAM.

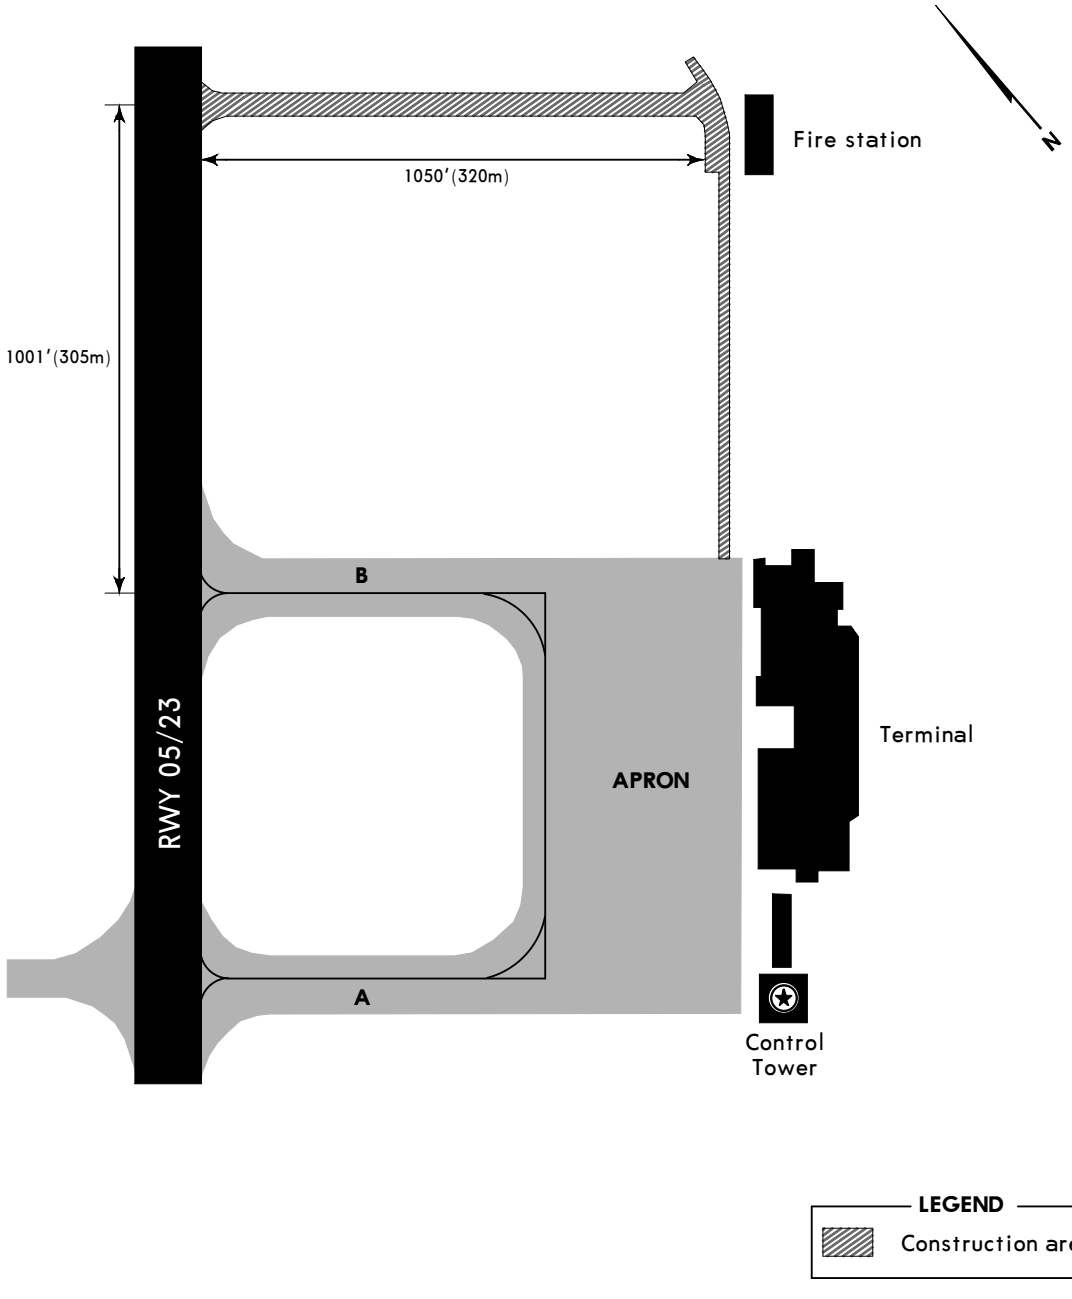

CHANGES: New temporary chart.

© JEPPESEN, 2026. ALL RIGHTS RESERVED.

*UBON Departure (R)	Apt Elev
134.1	411

Trans alt: 11000

RNP 1 required GNSS required


If unable to comply with SID or climb gradient, advise UBON Approach on 123.5.

ASABO 1B [ASAB1B]
ENLEP 1B [ENLE1B]
POTEV 1B [POTE1B]
SAGAL 1B [SAGA1B]
VENPO 1B [VENP1B]
RNP DEPARTURES
(RWY 05)

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▼ LOST


These SIDs require minimum climb gradient of: 377 FT/NM (6.2%) until 8000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
377 FT/NM	471	628	943	1257	1571	1885

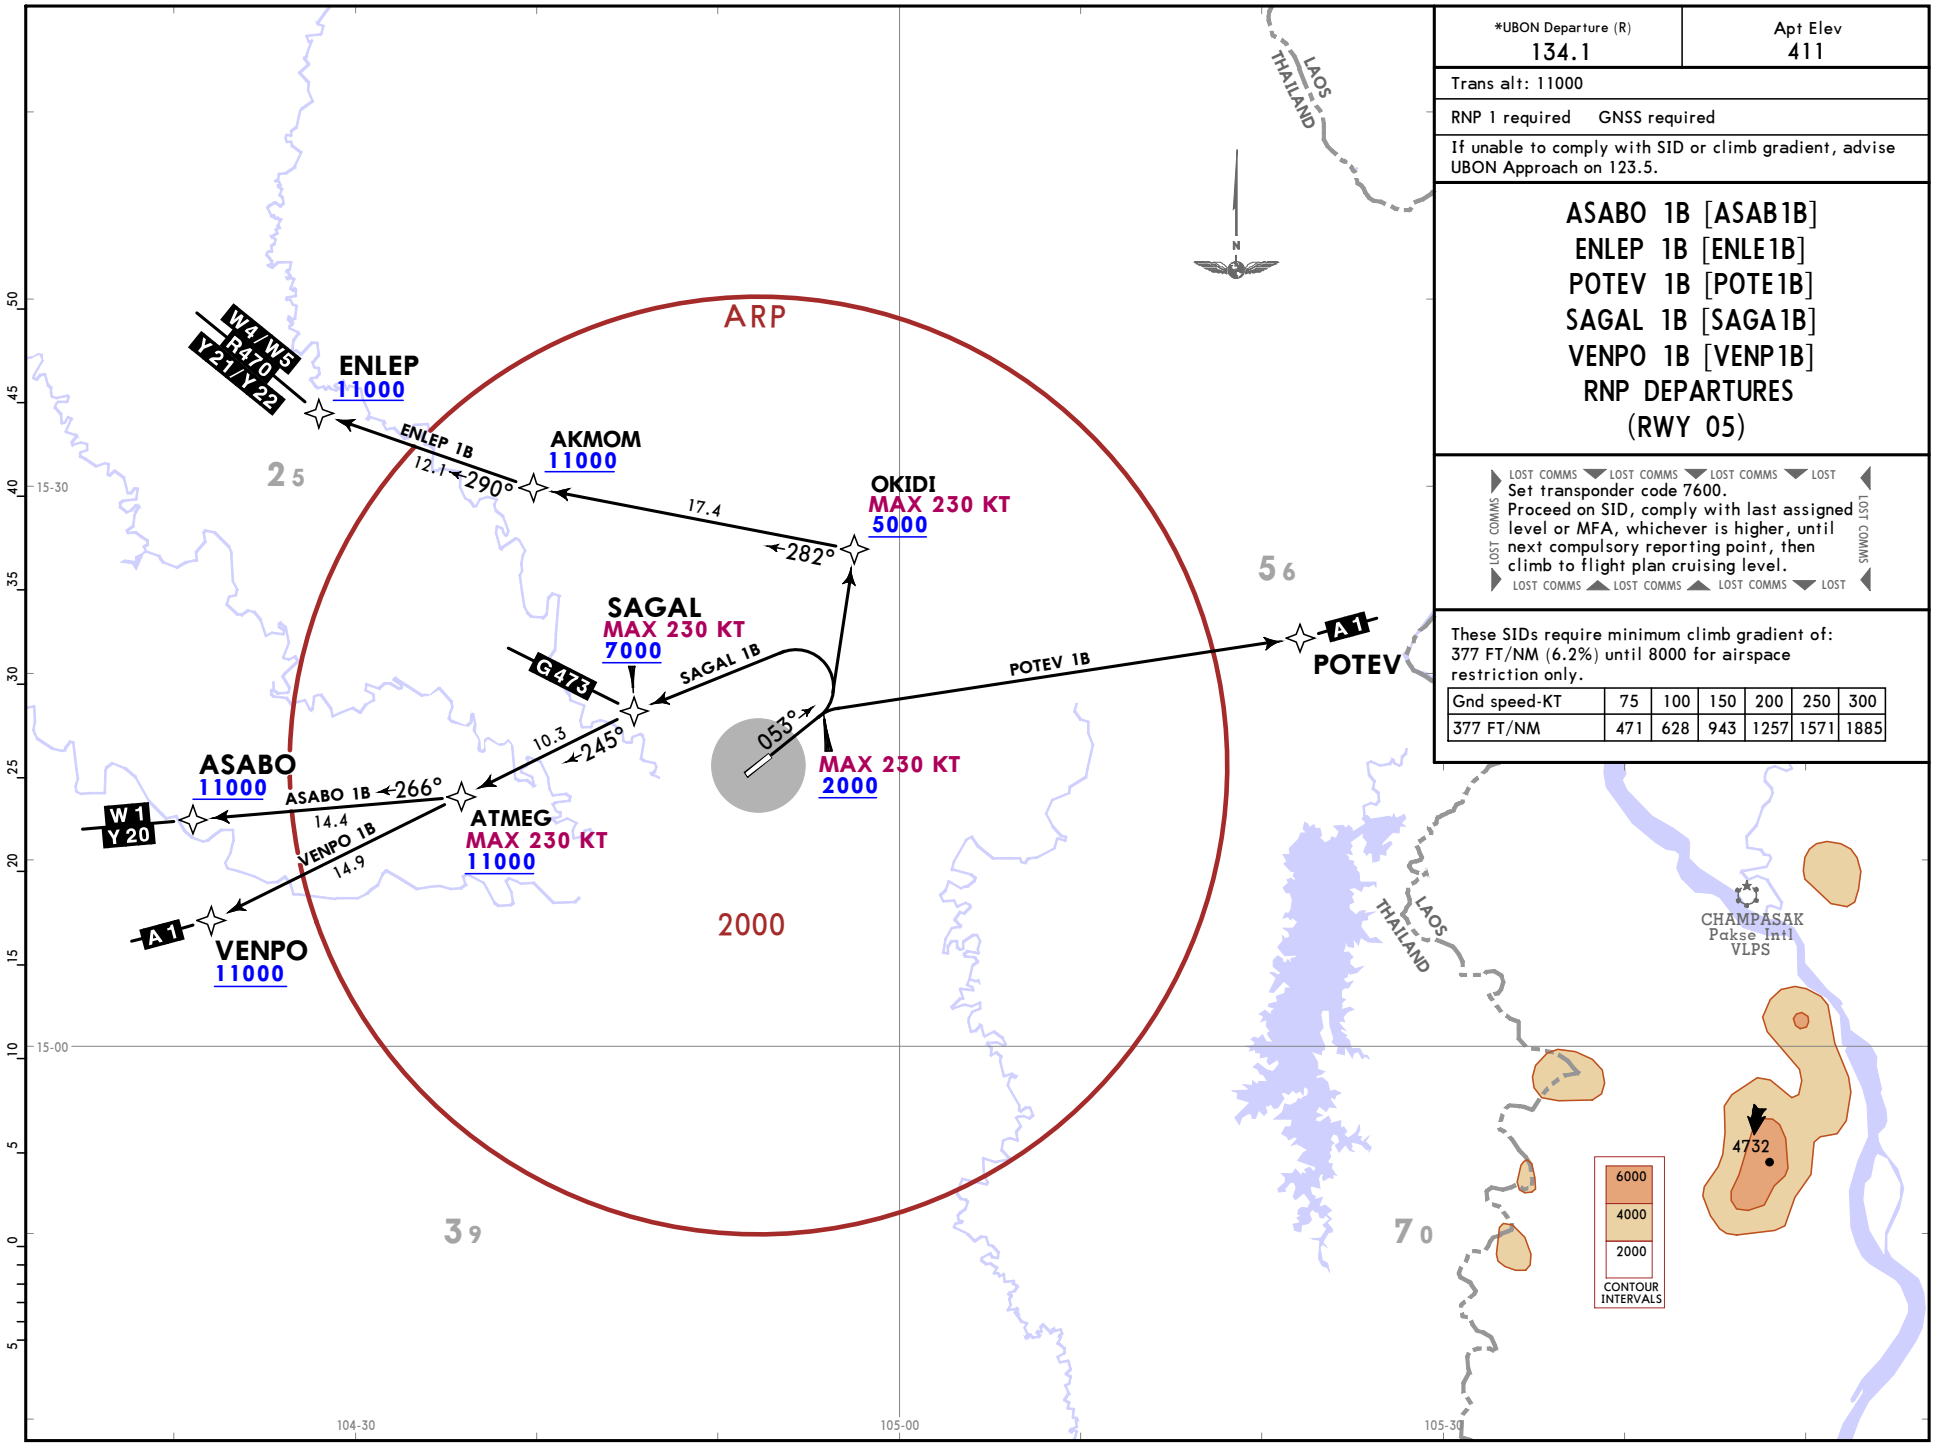

CHANGES: New procedures at this airport.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

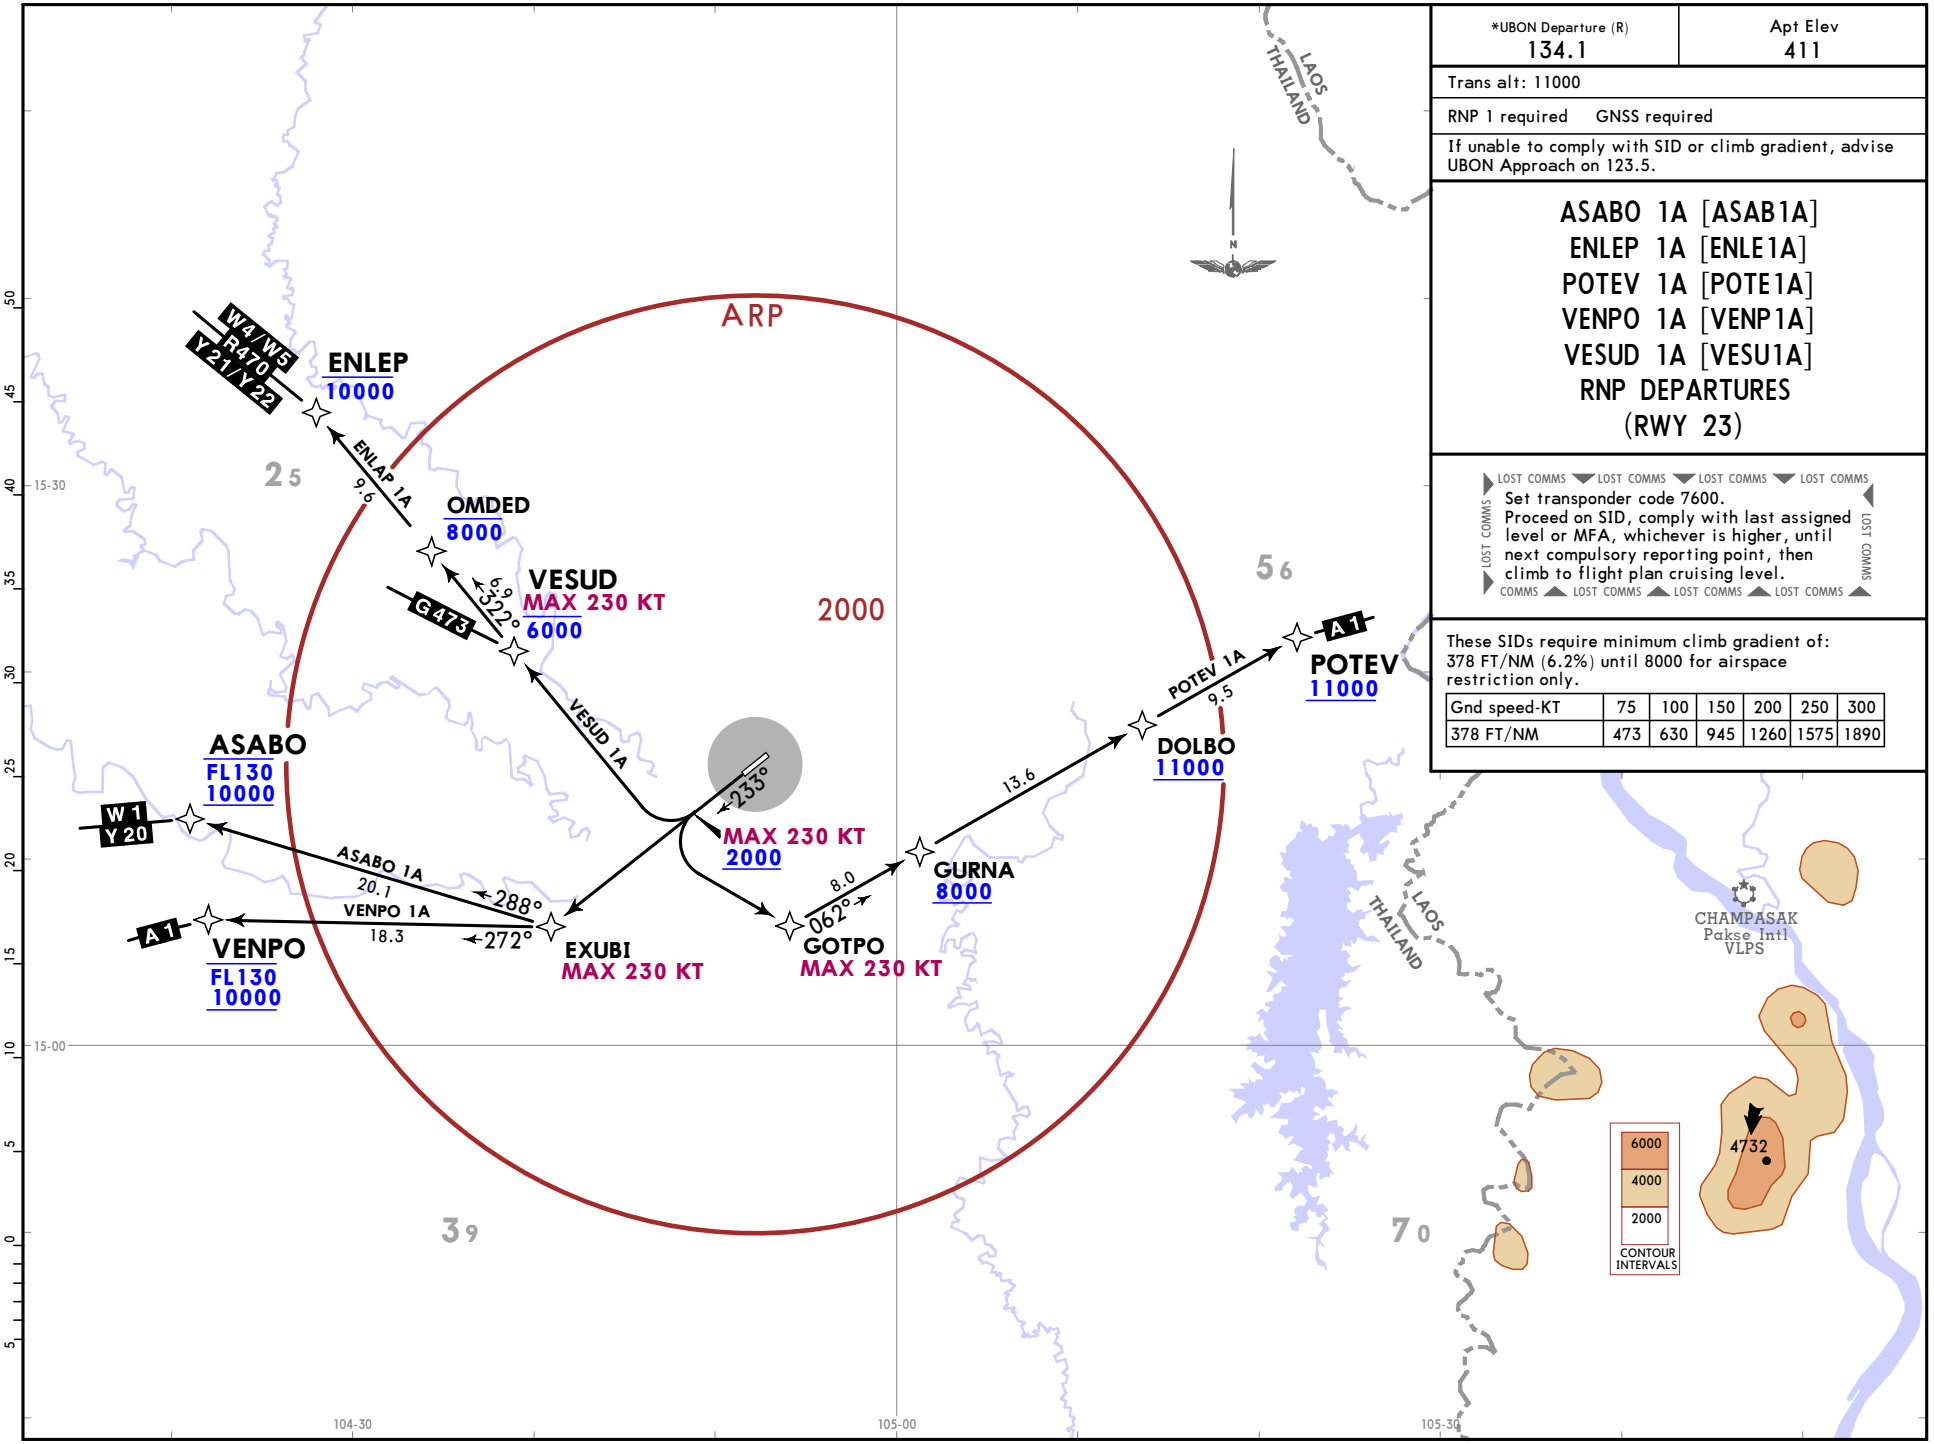

*UBON Departure (R)	Apt Elev
134.1	411

Trans alt: 11000

RNP 1 required GNSS required

If unable to comply with SID or climb gradient, advise UBON Approach on 123.5.

ASABO 1A [ASAB1A]
ENLEP 1A [ENLE1A]
POTEV 1A [POTE1A]
VENPO 1A [VENP1A]
VESUD 1A [VESU1A]
RNP DEPARTURES
(RWY 23)

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

These SIDs require minimum climb gradient of:
378 FT/NM (6.2%) until 8000 for airspace restriction only.

Gnd speed-KT	75	100	150	200	250	300
378 FT/NM	473	630	945	1260	1575	1890

CHANGES: New procedures at this airport.


© JEPPESEN, 2025. ALL RIGHTS RESERVED.

*UBON Departure (R)
134.1

Apt Elev
411

Trans alt: 11000
1. OMNIDIRECTIONAL departures during take-off and initial climb-out are permitted during the day and night. ATC clearance to execute an OMNIDIRECTIONAL depature may be issued upon request of the pilot or upon initiative of the ATC and accepted by the pilot.
2. The pilot shall be maintaining a minimum climb gradient up to specific altitude as published shown as below.
3. The pilot shall be responsible for adherence to such obtained ATC clearance.
4. The pilot prior to take-off shall agree to execute this procedure.
5. The ATC clearance shall be readback.

OMNI DEPARTURE
[OMNI]
(ALL RWYS)

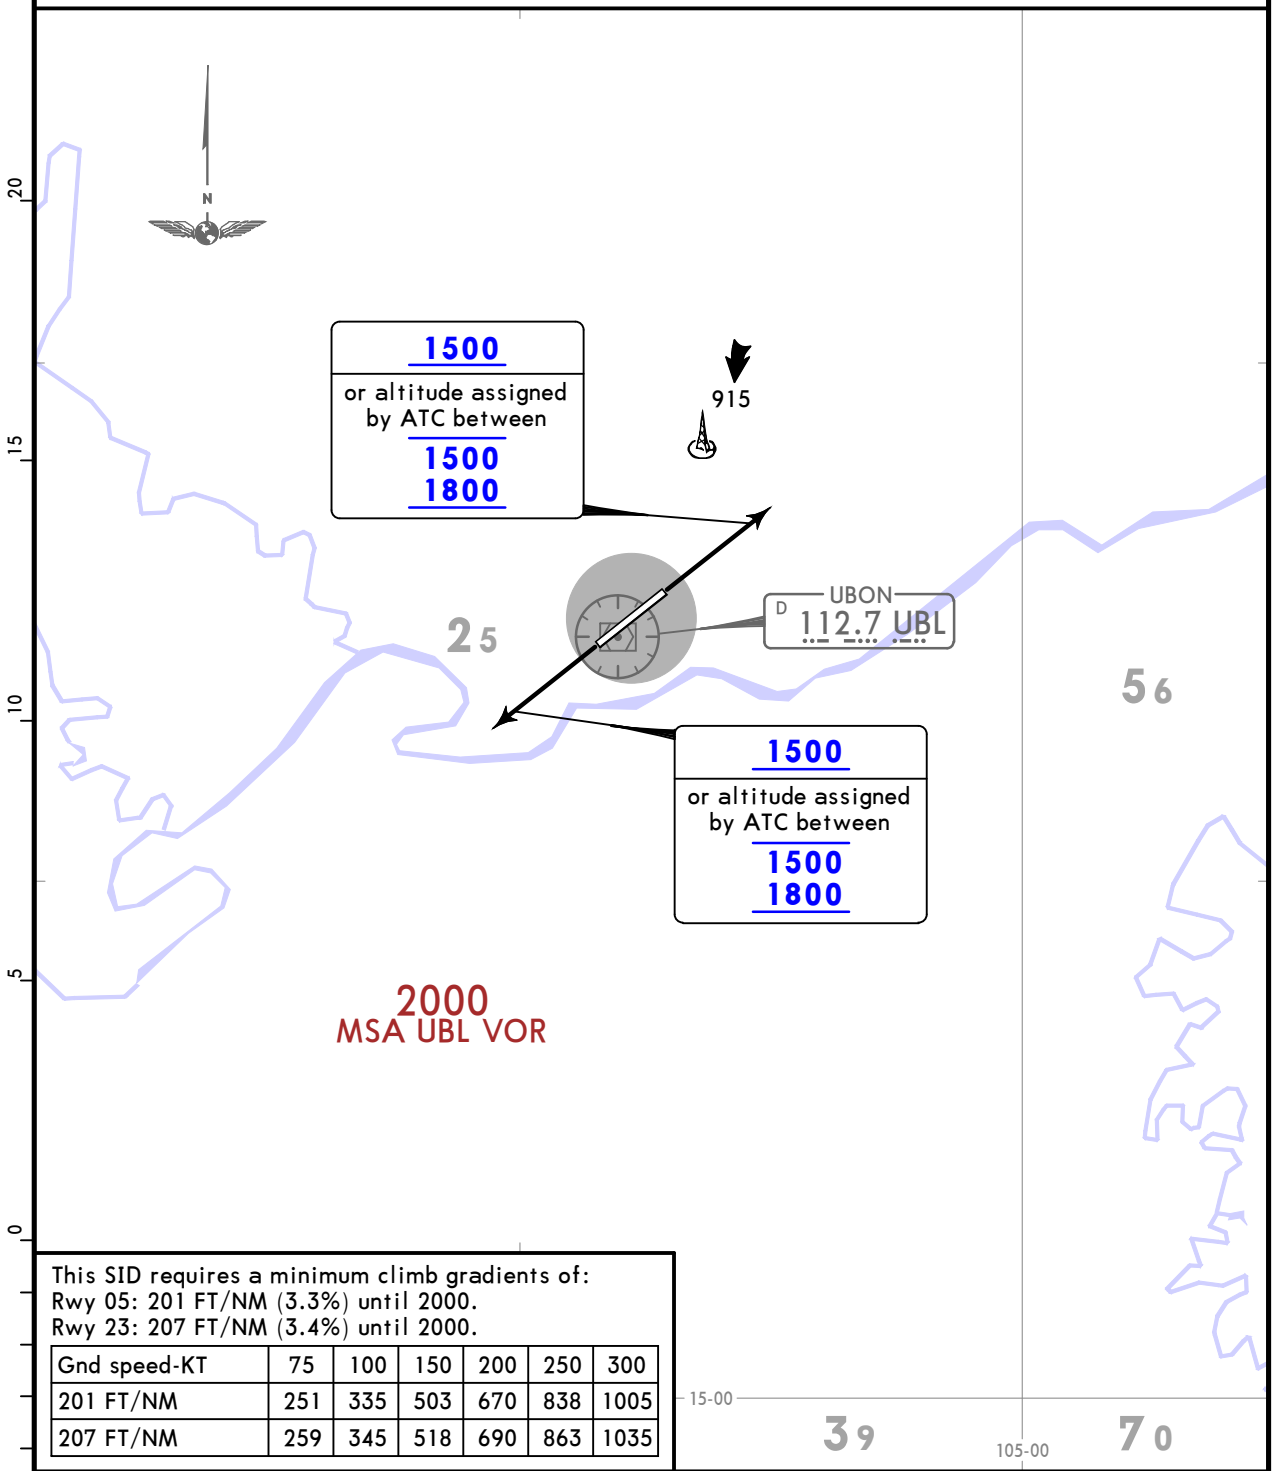

This SID requires a minimum climb gradients of:
Rwy 05: 201 FT/NM (3.3%) until 2000.
Rwy 23: 207 FT/NM (3.4%) until 2000.

Gnd speed-KT	75	100	150	200	250	300
201 FT/NM	251	335	503	670	838	1005
207 FT/NM	259	345	518	690	863	1035

RWY	INITIAL CLIMB
05	No turn before DER. After departure climb straight ahead until 1500 (or altitude assigned by ATC between 1500-1800), then comply with ATC clearence issued (or as directed by ATC).
23	No turn before DER. After departure climb straight ahead until 1500 (or altitude assigned by ATC between 1500-1800), then comply with ATC clearence issued (or as directed by ATC).

CHANGES: Chart reindexed, airport elevation revised.

© JEPPESEN, 2023, 2025. ALL RIGHTS RESERVED.

ATIS	Apt Elev	Alt set: hPa	Trans level: FL130
128.2	411	RNP 1 required	GNSS required

ASABO 1D [ASAB1D]
ENLEP 1D [ENLE1D]
OBKIB 1D [OBKI1D]
POTEV 1D [POTE1D]
VENPO 1D [VENP1D]
RNP ARRIVALS
(RWY 23)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to SUNIN.
Commence descend in the SUNIN holding as close as EAT or ETA to 3000. Carry out standard instruction approach to RWY 23.

ARP

ENLEP
11000

W4/W5
R470
Y21/Y22

110° 12.1 ENLEP 1D

AKMOM
11000

100° 16.4

RUSTU
5000

143° 7.0

SUNIN
MAX 230 KT
3000

233° MAX 230 KT MHA 3000
053°
9.7

272°

OSNID
6000

10.6 POTEV 1D
271°

POTEV
10000

A1

G473

060° 15.6 OBKIB 1D

OBKIB
10000

ASABO
FL140

W1
Y20

086° 11.3 ASABO 1D

060° 11.5

UBNES
FL140

VENPO 1D 12.1
060°

A1

VENPO
FL140

2000

25 39 56 70

15-30 15-00

104-30 105-00 105-30

LAOS
THAILAND

CHAMPASAK
Pakse Intl
VLPS

4732

6000
4000
2000
CONTOUR INTERVALS

CHANGES: None.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

JEPPESEN UBON, THAILAND
29 AUG 25 10-2 Eff 4 Sep RNAV STAR

ATIS	Apt Elev	Alt set: hPa	Trans level: FL130
128.2	411	RNP 1 required	GNSS required

ASABO 1C [ASAB1C]
ENLEP 1C [ENLE1C]
POTEV 1C [POTE1C]
VENPO 1C [VENP1C]
VESUD 1C [VESU1C]
RNP ARRIVALS
(RWY 05)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to ARARA.
Commence descend in the ARARA holding as close as EAT or ETA to 3000. Carry out standard instrument approach to RWY 05.

ARP
2000
LAOS
THAILAND
W4/W5
R470
Y21/Y22
ENLEP
10000
142°
ENLEP 1C
16.5
G473
VESUD
5000
180°
VESUD 1C
7.3
AREVU
5000
143°
7.0
ARARA
MAX 230 KT
3000
ASABO
10000
W1
Y20
ASABO 1C
100°
10.1
TOGOK
7000
102°
12.0
11.1
VENPO
10000
A1
9.8
VENPO 1C
086°
GOPVI
7000
087°
053°
233°
8.0
323°
MAX 230 KT
MHA 3000
SADUP
5000
21.8
239°
OPTAD
11000
POTEV 1C
16.1
241°
POTEV
11000
A1
CHAMPASAK
Pakse Intl
VLPS
6000
4000
2000
CONTOUR INTERVALS
4732
25
39
56
70
15-30
15-00
104-30
105-00
105-30

CHANGES: Lost communications note.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
19 DEC 25 (11-2) Eff 25 Dec

UBON, THAILAND
ILS or LOC Y Rwy 23

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9

BRIEFING STRIP ™

LOC IUBL	Final Apch Crs	UBNON MANDATORY	ILS DA(H)	Apt Elev 411′ Rwy 397′
110.1	233°	2000′ (1603′)	650′ (253′)	


MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb STRAIGHT AHEAD to 1500′ then turn RIGHT to intercept outbound UBL VOR R-052 and proceed to SUNIN at minimum 3000′ and hold or as directed by ATC.

2000


MSA UBL VOR

Alt Set: hPa | Rwy Elev: 14 hPa | Trans level: FL130 | Trans alt: 11000′

VOR, DME required.

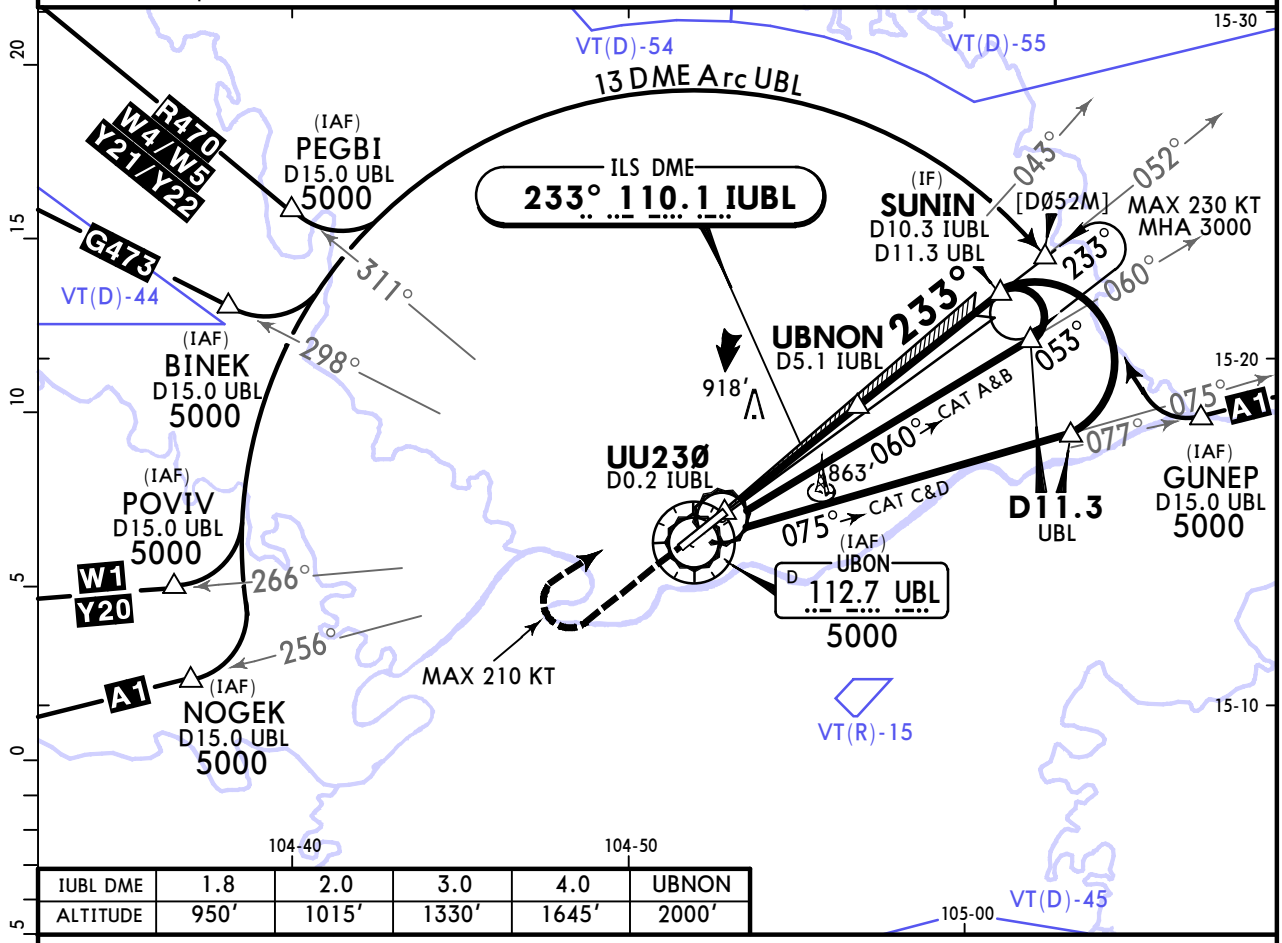

IUBL DME	1.8	2.0	3.0	4.0	UBNON
ALTITUDE	950′	1015′	1330′	1645′	2000′

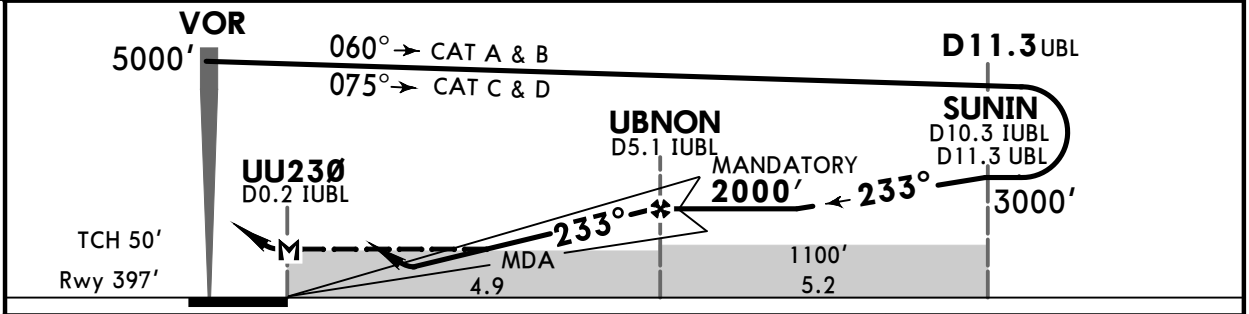

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at UU23Ø							

PAPI | SALS

210 KT max

1500′

3000′ via RT

UBL 112.7 R-052

PANS OPS

Std STRAIGHT-IN LANDING

	ILS DA(H) 650′ (253′) ALS out		LOC (GS out) CDFA 1 DA/MDA(H) 950′ (553′) ALS out	
A	R1100m	R1300m	R1500m	
B				
C			R2300m	R2400m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1400′ (989′)	V1500m
135	1400′ (989′)	V1600m
180	1400′ (989′)	V2400m
205	1400′ (989′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure title, ILS minimums added.

© JEPPESEN, 2004, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
19 DEC 25 (11-1) Eff 25 Dec

UBON, THAILAND
ILS or LOC Z Rwy 23

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9


LOC IUBL	Final Apch Crs	UBNON MANDATORY	ILS DA(H)	Apt Elev 411′ Rwy 397′
110.1	233°	2000′ (1603′)	650′ (253′)	

MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb on track 233° to 1500′, then turn RIGHT direct to SUNIN at minimum 3000′ and hold or as directed by ATC.


Alt Set: hPa	Rwy Elev: 14 hPa	Trans level: FL130	Trans alt: 11000′
RNP 1 required	1. GNSS required. 2. DME required.		

2000
MSA ARP

BRIEFING STRIP™

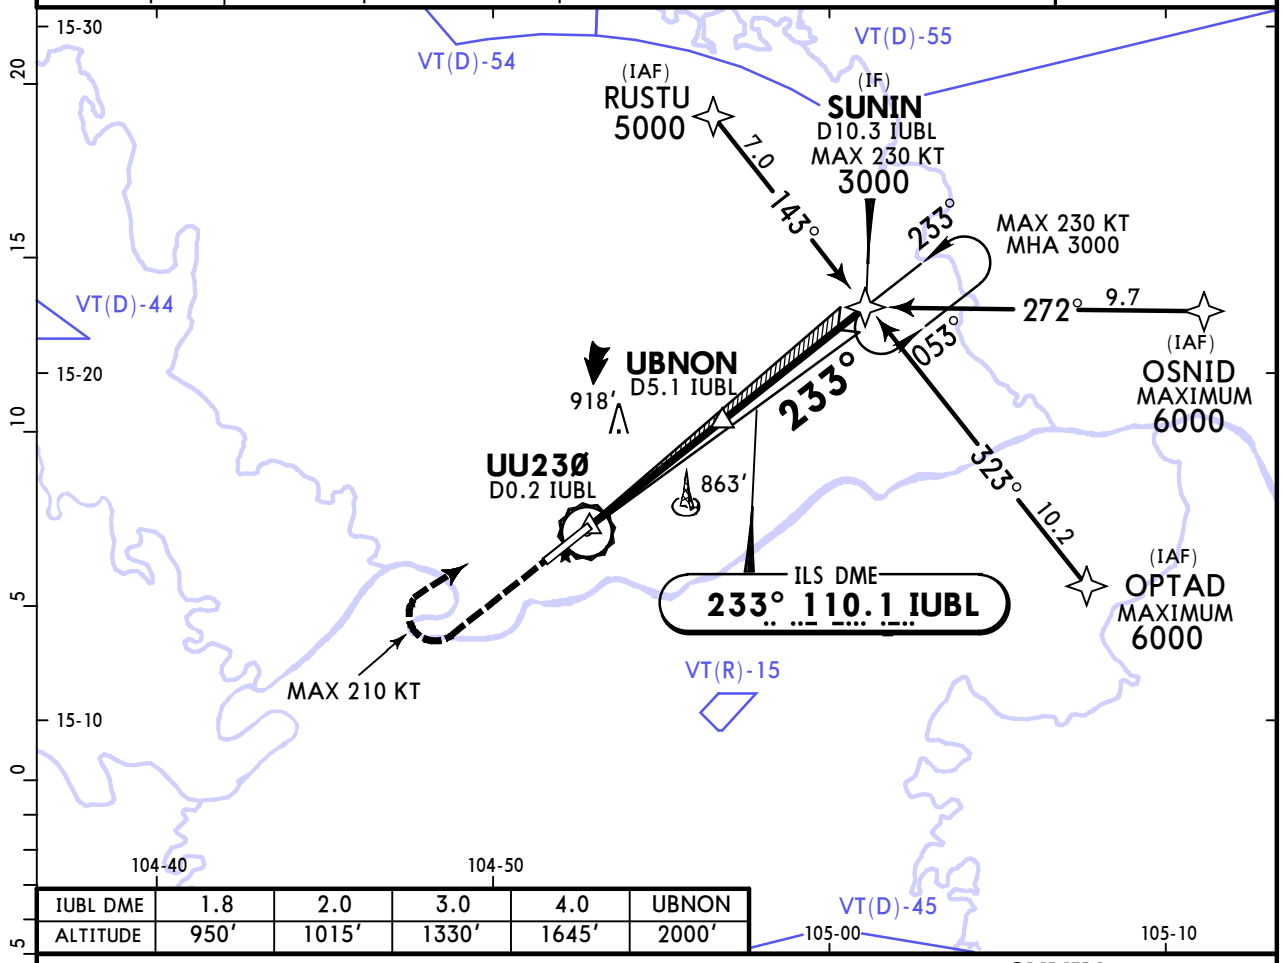

IUBL DME	1.8	2.0	3.0	4.0	UBNON
ALTITUDE	950′	1015′	1330′	1645′	2000′

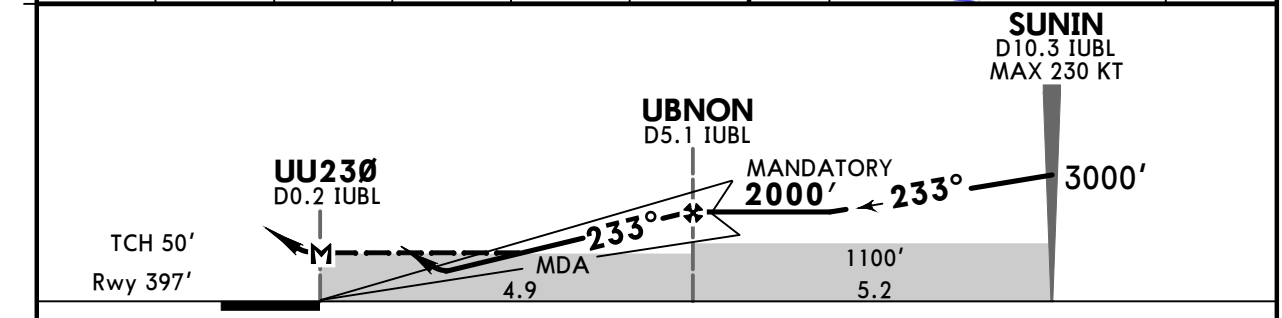

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at UU23Ø							

PAPI SALS

210 KT max

1500′ on **233°**

PANS OPS

Std STRAIGHT-IN LANDING

	ILS DA(H) 650′ (253′) ALS out		LOC (GS out) CDFA 1 DA/MDA(H) 950′ (553′) ALS out	
A	R1100m	R1300m	R1500m	
B				
C			R2300m	R2400m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1400′ (989′)	V1500m
135	1400′ (989′)	V1600m
180	1400′ (989′)	V2400m
205	1400′ (989′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure title, ILS minimums added.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
4 JUL 25 (12-1) Eff 10 Jul

UBON, THAILAND
RNP Rwy 05

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9

BRIEFING STRIP ™


RNAV	Final Apch Crs	SAPIL MANDATORY	LNAV/VNAV DA(H)	Apt Elev 411′
	053°	2000′ (1589′)	890′ (479′)	Rwy 411′

MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb on track 053° to 1500′ then turn LEFT direct to ARARA at minimum 3000′ and hold or as directed by ATC.


Alt Set: hPa | Rwy Elev: 15 hPa | Trans level: FL130 | Trans alt: 11000′

RNP Apch | Baro-VNAV not authorized below +10°C.

2000
MSA ARP

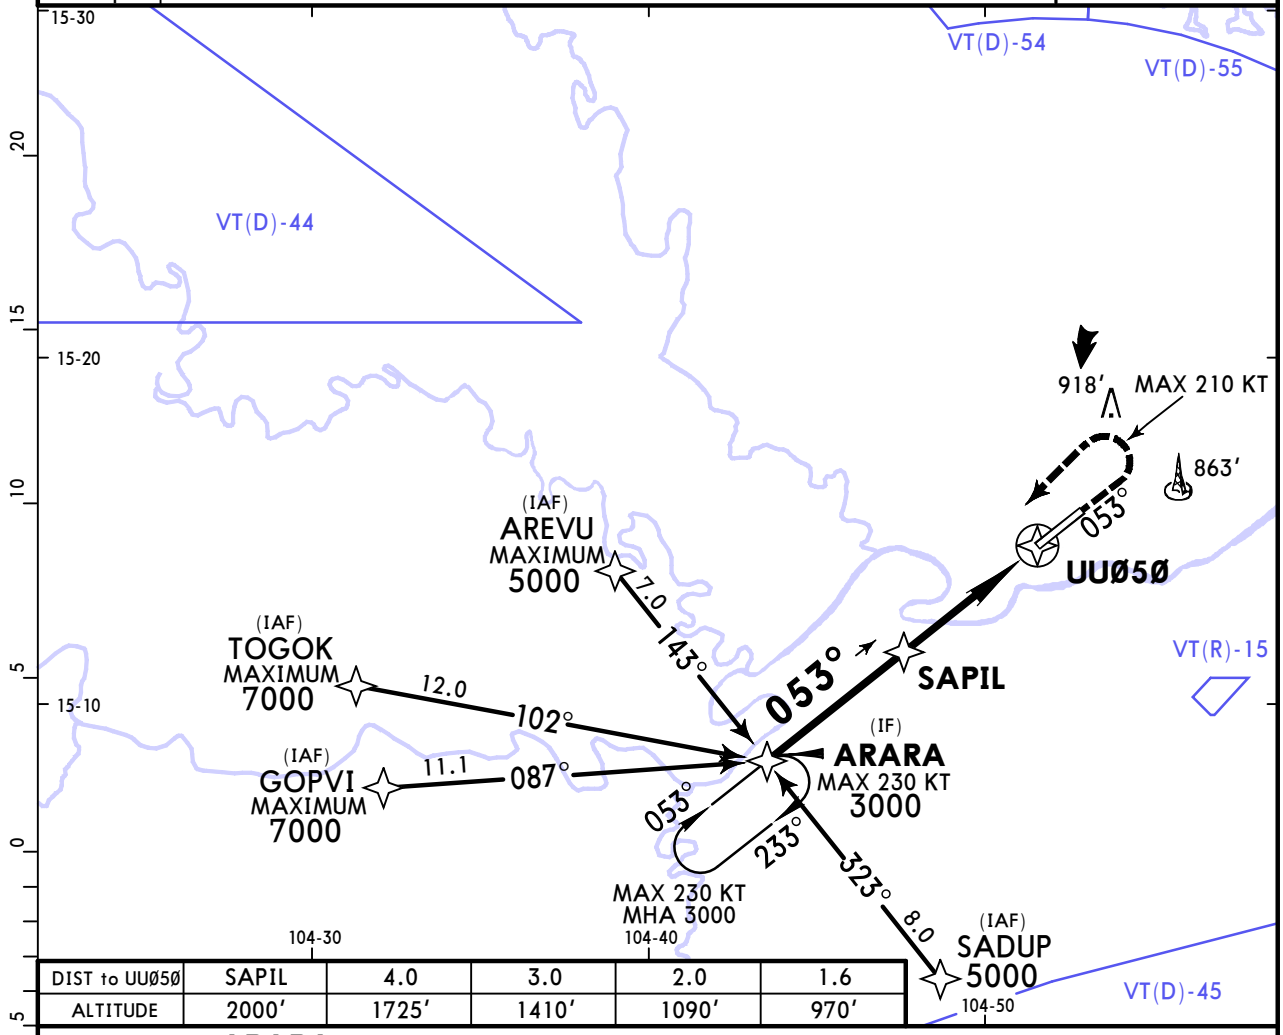

DIST to UU05Ø	SAPIL	4.0	3.0	2.0	1.6
ALTITUDE	2000′	1725′	1410′	1090′	970′

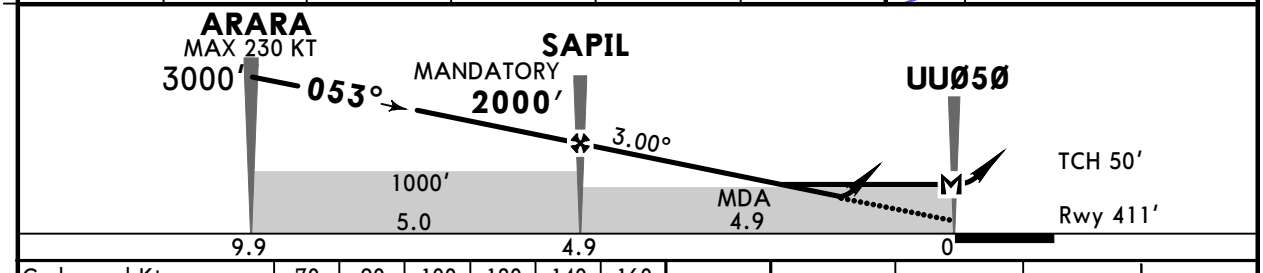

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at UU05Ø							

PAPI | SALS | 210 KT max | 1500′ on 053°

PANS OPS

Std

STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 890′ (479′)		LNAV CDFA 1 DA/MDA(H) 970′ (559′)	
		ALS out		ALS out
A	R1500m		R1500m	
B				
C	R1800m	R2200m	R2100m	R2400m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1400′ (989′) V1500m
135	1400′ (989′) V1600m
180	1400′ (989′) V2400m
205	1400′ (989′) V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure revised.

© JEPPESEN, 2014, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
4 JUL 25 (12-2) Eff 10 Jul

UBON, THAILAND
RNP Rwy 23

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9


BRIEFING STRIP™

RNAV	Final Apch Crs	UBNON MANDATORY	LNAV/VNAV DA(H)	Apt Elev 411′ Rwy 397′
	233°	2000′ (1603′)	760′ (363′)	


MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb on track 233° to 1500′, then turn RIGHT direct to SUNIN at minimum 3000′ and hold or as directed by ATC.

2000
MSA ARP

Alt Set: hPa	Rwy Elev: 14 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below +10°C.		

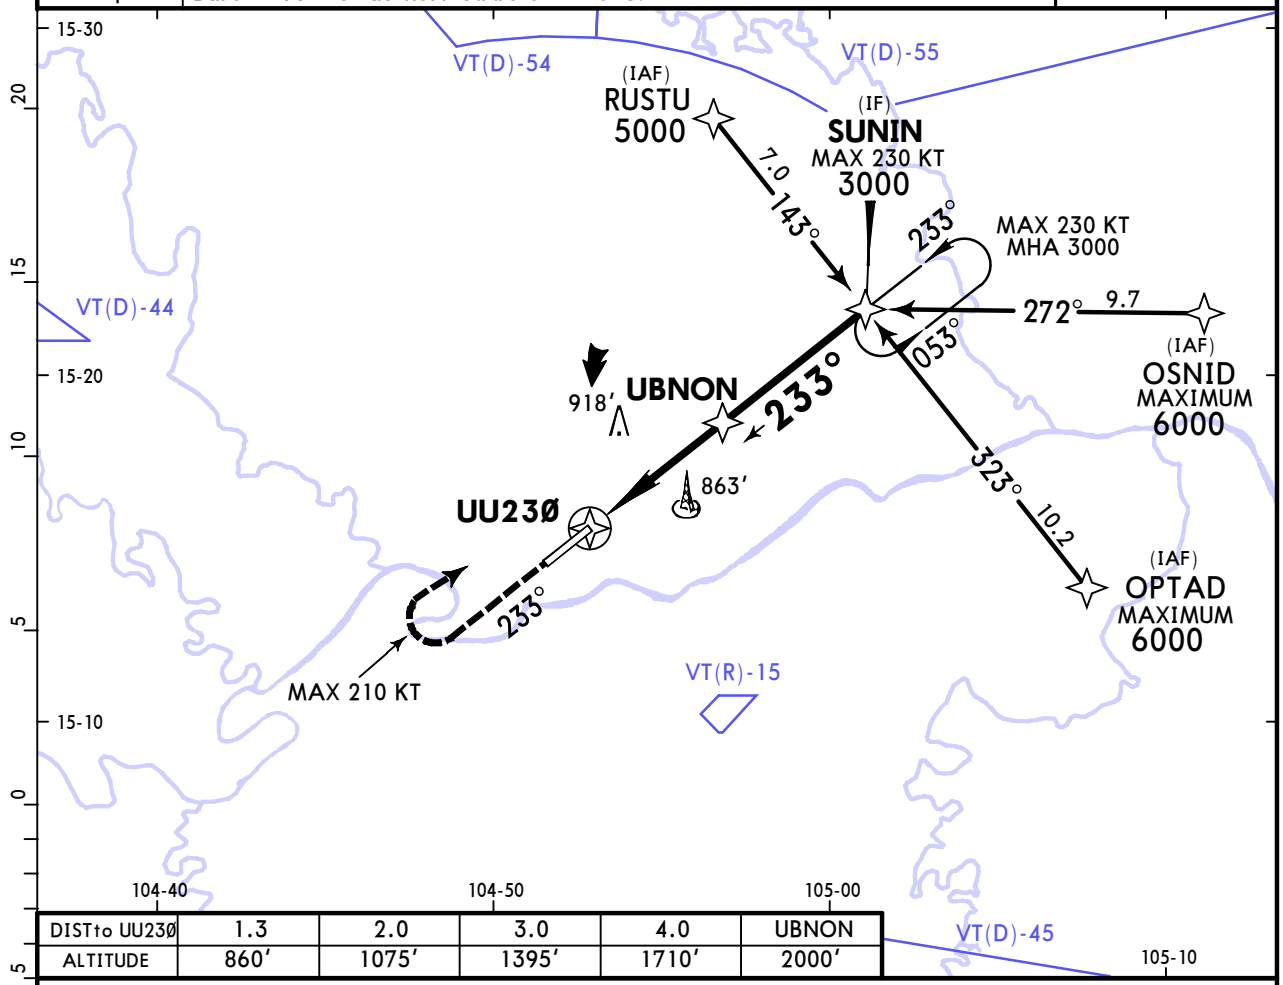

DISTto UU23Ø	1.3	2.0	3.0	4.0	UBNON
ALTITUDE	860′	1075′	1395′	1710′	2000′

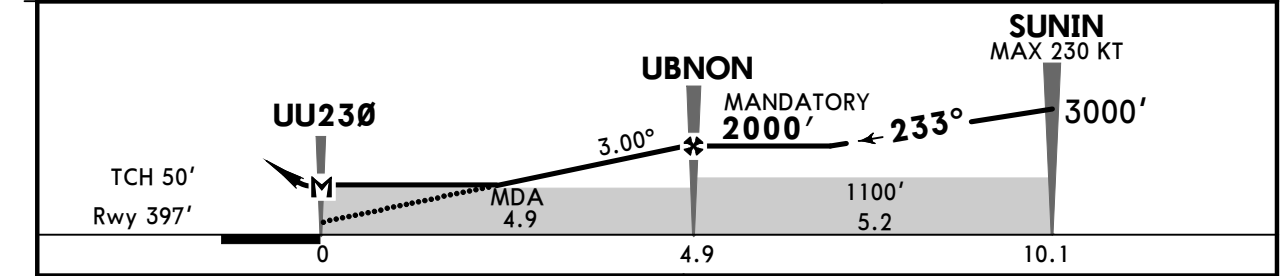

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at UU23Ø							

PAPI SALS | 210 KT max | 1500′ on 233°

Std

STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 760′ (363′)		LNAV CDFA 1 DA/MDA(H) 860′ (463′)	
		ALS out		ALS out
A	R1500m		R1500m	
B				
C	R1500m	R1700m	R2000m	R2200m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1400′ (989′) V1500m
135	1400′ (989′) V1600m
180	1400′ (989′) V2400m
205	1400′ (989′) V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure revised.

© JEPPESEN, 2014, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
4 JUL 25 (13-1) Eff 10 Jul

UBON, THAILAND
VOR Rwy 05

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9

BRIEFING STRIP ™

VOR UBL	Final Apch Crs	MUBDA MANDATORY	DA/MDA(H)	Apt Elev 411′
112.7	059°	2000′ (1589′)	970′ (559′)	Rwy 411′


MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb STRAIGHT AHEAD to 1500′ then turn LEFT to intercept outbound UBL VOR R-239 and proceed to NINOM at minimum 3000′ and hold or as directed by ATC.

Alt Set: hPa | Rwy Elev: 15 hPa | Trans level: FL130 | Trans alt: 11000′


DME required.

2000

MSA UBL VOR

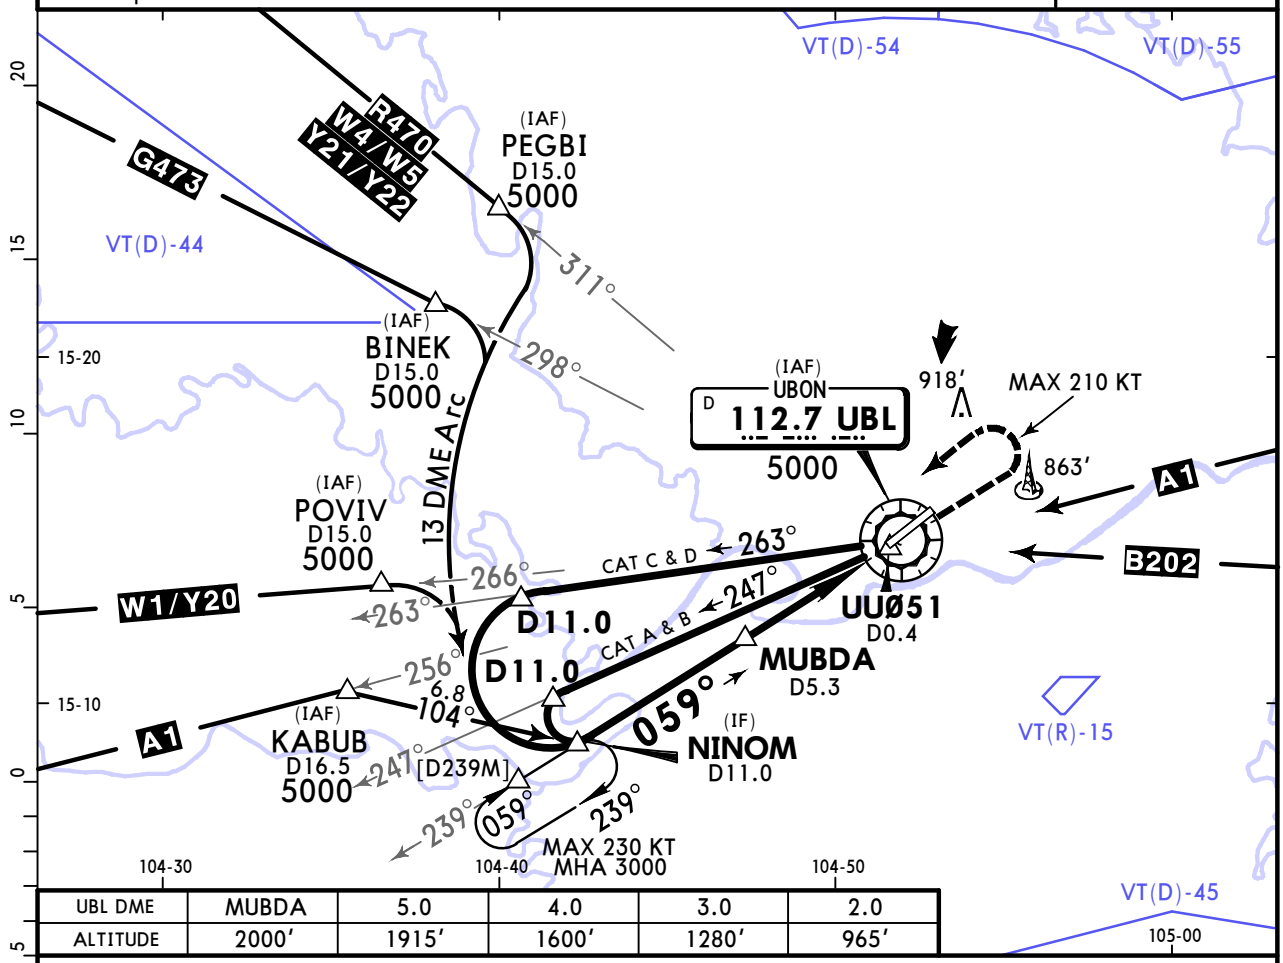

UBL DME	MUBDA	5.0	4.0	3.0	2.0
ALTITUDE	2000′	1915′	1600′	1280′	965′

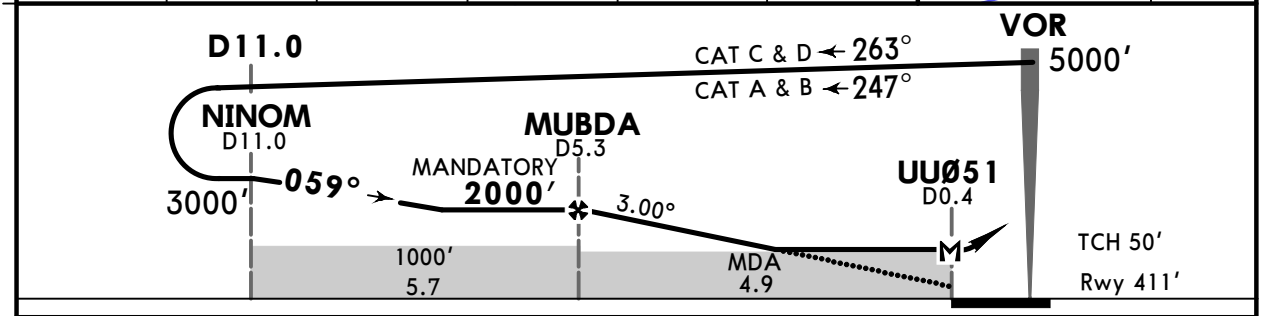

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at UUØ51						

PAPI | SALS

210 KT max | 1500′ | 3000′ LT via UBL 112.7 R-239

PANS OPS

Std STRAIGHT-IN LANDING

CDFA

1 DA/MDA(H) 970′ (559′)

ALS out

A	R1500m	
B		
C	R2100m	R2500m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	1400′ (989′)	V1500m
135	1400′ (989′)	V1600m
180	1400′ (989′)	2 V2400m
205	1400′ (989′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy. 2 or higher straight-in minimums.

CHANGES: Procedure revised.

© JEPPESEN, 2004, 2025. ALL RIGHTS RESERVED.

VTUU/UBP
UBON RATCHATHANI

JEPPESEN
4 JUL 25 (13-2) Eff 10 Jul

UBON, THAILAND
VOR Rwy 23

*ATIS	*UBON Approach (R)	*UBON Tower	*Ground
128.2	123.5	119.9	121.9

BRIEFING STRIP ™


VOR UBL	Final Apch Crs	MALOL MANDATORY	DA/MDA(H)	Apt Elev 411′ Rwy 397′
112.7	229°	2000′ (1603′)	950′ (553′)	

MISSED APCH: No turn before MAP. MAX 210 KT until after turn. Climb STRAIGHT AHEAD to 1500′ then turn RIGHT to intercept outbound UBL VOR R-049 and proceed to DUGIL at minimum 3000′ and hold or as directed by ATC.


2000
MSA UBL VOR

Alt Set: hPa | Rwy Elev: 14 hPa | Trans level: FL130 | Trans alt: 11000′

DME required.

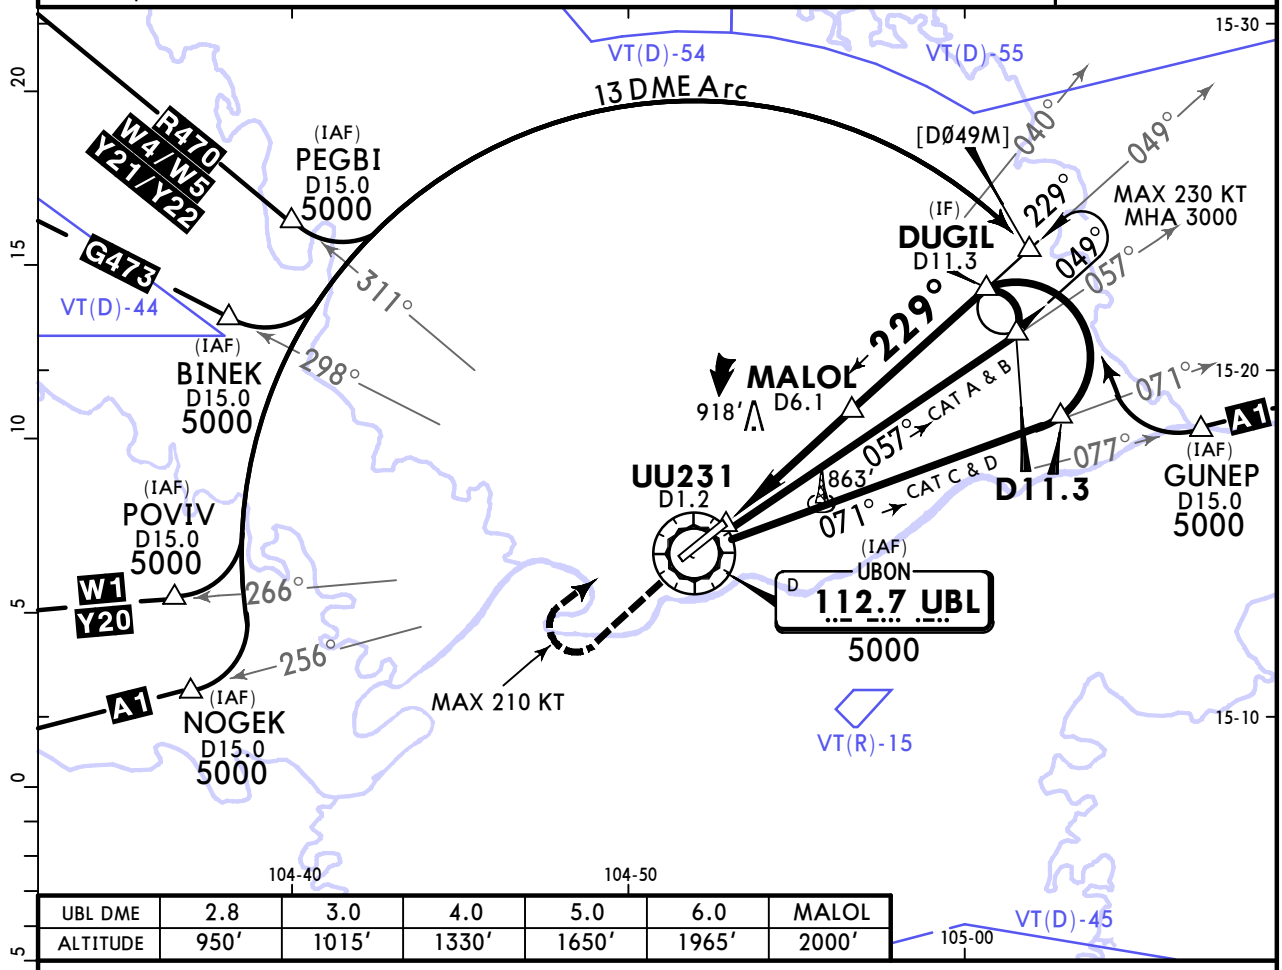

104-40			104-50		
UBL DME	2.8	3.0	4.0	5.0	6.0	MALOL
ALTITUDE	950′	1015′	1330′	1650′	1965′	2000′

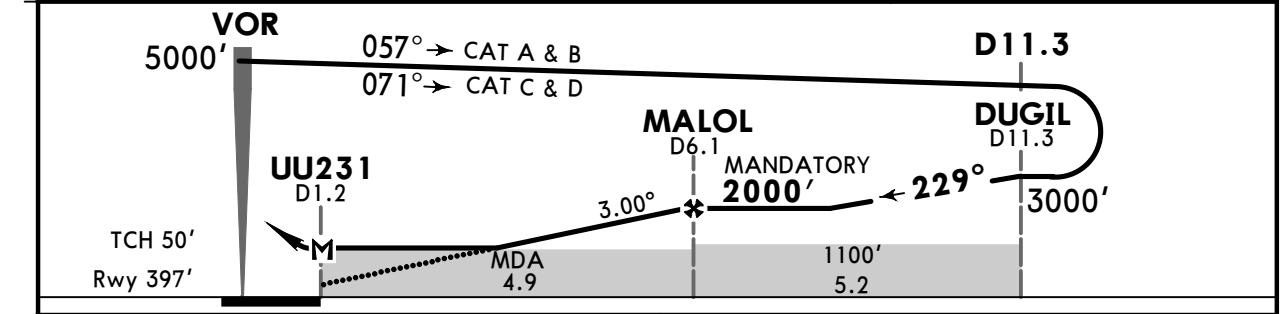

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at UU231							

PAPI | SALS

210 KT max | 1500′ | 3000′ via RT | UBL 112.7 R-049

Std STRAIGHT-IN LANDING

CDFA

1 DA/MDA(H) 950′ (553′)

ALS out

A	R1500m	
B		
C	R2300m	R2400m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1400′ (989′) V1500m
135	1400′ (989′) V1600m
180	1400′ (989′) V2400m
205	1400′ (989′) V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure revised.

© JEPPESEN, 2004, 2025. ALL RIGHTS RESERVED.