
D-ATIS Departure	DON MUEANG Clearance	Ground	Tower
118.55	127.7	121.9 122.5	118.1


When Rwy 03R/21L is in use, Twy Y is not allowed to be used by other aircraft. If Twy Y is in use, Rwy 03R/21L will not be allowed to be used.

Birds on vicinity of airport.

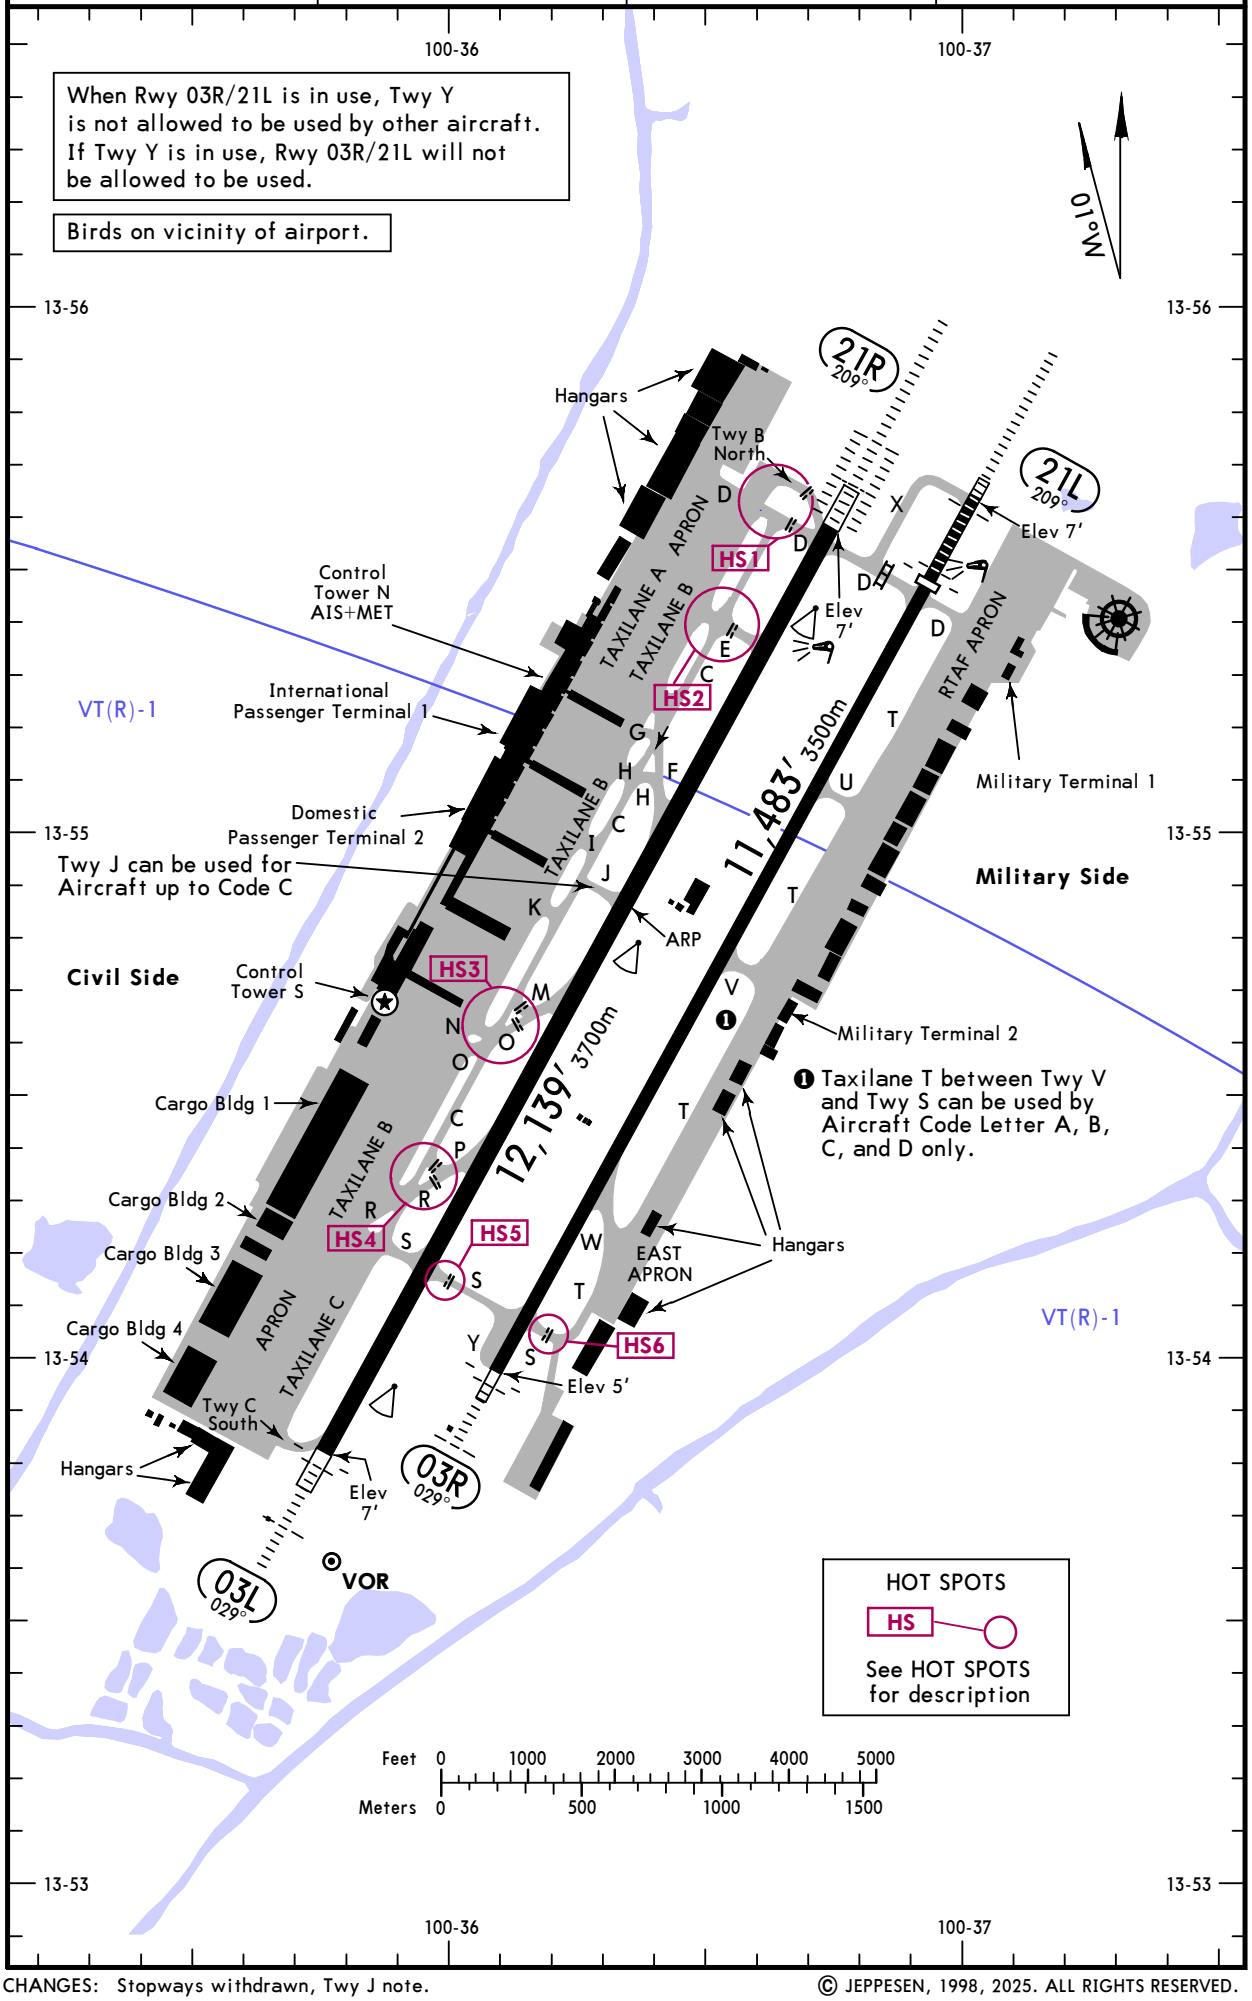

CHANGES: Stopways withdrawn, Twy J note.

© JEPPESEN, 1998, 2025. ALL RIGHTS RESERVED.

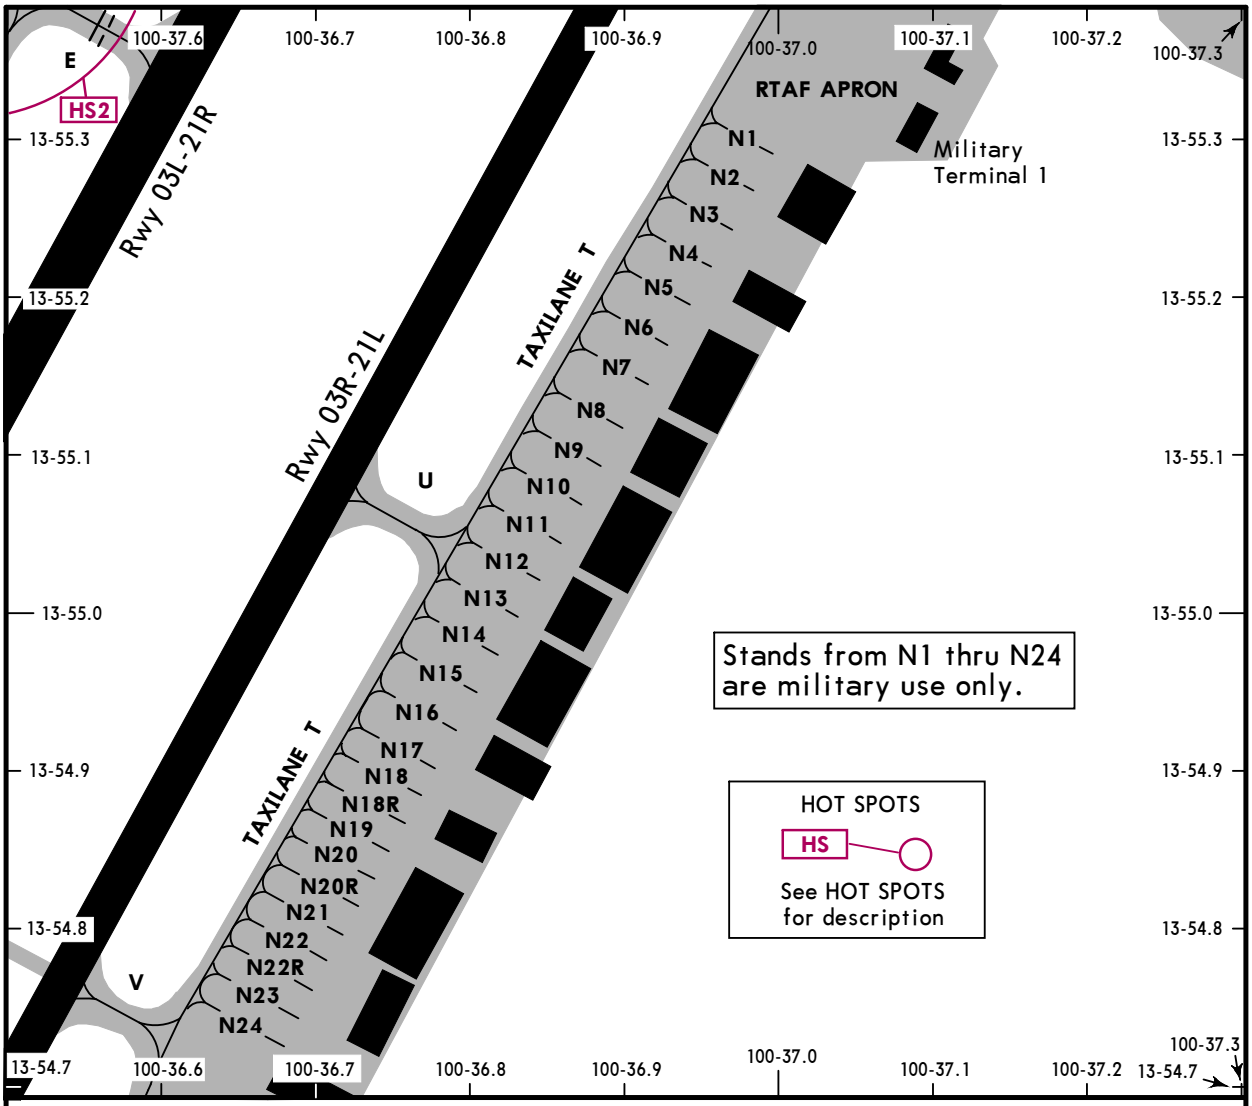

PARKING STANDS COORDINATES


STAND No.	COORDINATES	CAPACITY	REMARKS
RTAF APRON			
N1 thru N3	N14 00.0 E100 37.0	B737-400, B737-800	For VVIP, VIP
N4 thru N9	N14 00.0 E100 36.9	B737-400, B737-800	For VVIP, VIP
N10	N14 00.0 E100 36.9	A319, A320, SSJ100	
N11 thru N13	N14 00.0 E100 36.8	A319, A320, SSJ100	
N14, N15	N14 00.0 E100 36.8	ATR72	
N16 thru N18	N14 00.0 E100 36.8	C-130	
N18R thru N21	N14 00.0 E100 36.7	C-130	
N22 thru N23	N14 00.0 E100 36.7	A340-500	
N24	N14 00.0 E100 36.7	C-130	

CHANGES: Reference to the chart with Hot Spots.

© JEPPESEN, 2024, 2025. ALL RIGHTS RESERVED.

BANGKOK, THAILAND

DON MUEANG INTL

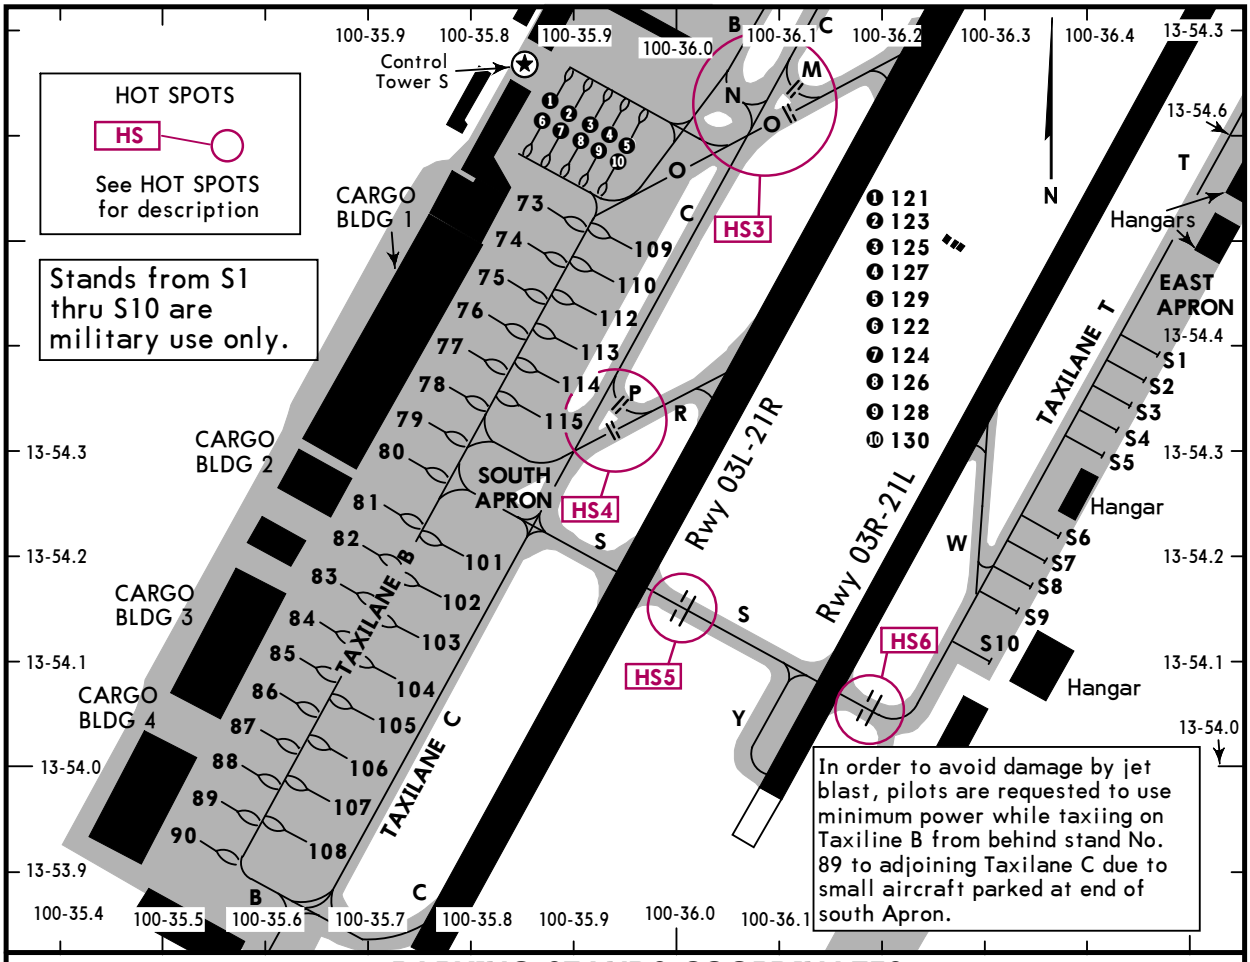

PARKING STANDS COORDINATES


STAND No.	COORDINATES	CAPACITY
SOUTH APRON		
73	N13 54.5 E100 35.9	B744/B773/A346
74, 75	N13 54.5 E100 35.8	B744/B773/A346
76, 77, 78	N13 54.4 E100 35.8	B744/B773/A346
79, 80	N13 54.3 E100 35.7	B744/B773/A346
81, 82, 83	N13 54.2 E100 35.7	B744/B773/A346
84, 85, 86	N13 54.1 E100 35.6	B744/B773/A346
87, 88, 89	N13 54.0 E100 35.6	B744/B773/A346
90	N13 53.9 E100 35.5	B744/B773/A346
101	N13 54.2 E100 35.8	B747-400
102, 103	N13 54.1 E100 35.8	B747-400
104	N13 54.1 E100 35.7	B747-400
105, 106, 107	N13 54.0 E100 35.7	B747-400
108	N13 53.9 E100 35.7	B747-400
109	N13 54.5 E100 35.0	B772/A333/A346
110	N13 54.4 E100 35.0	B772/A333/A346
112, 113	N13 54.4 E100 35.9	B772/A333/A346
114	N13 54.3 E100 35.9	B772/A333/A346
115	N13 54.3 E100 35.9	MD-11
121 thru 130	N13 54.6 E100 35.9	B737-400
EAST APRON		
S1 thru S3	N13 54.3 E100 36.4	C-130, ATR72
S4, S5	N13 54.3 E100 36.4	LIGHT AIRCRAFT
S6	N13 54.2 E100 36.4	HELICOPTER
S7, S9	N13 54.2 E100 36.4	A319, A320, SSJ100
S8	N13 54.2 E100 36.4	
S10	N13 54.1 E100 36.3	HELICOPTER

CHANGES: Reference to the chart with Hot Spots.


© JEPPESEN, 2004, 2025. ALL RIGHTS RESERVED.

BANGKOK, THAILAND

DON MUEANG INTL

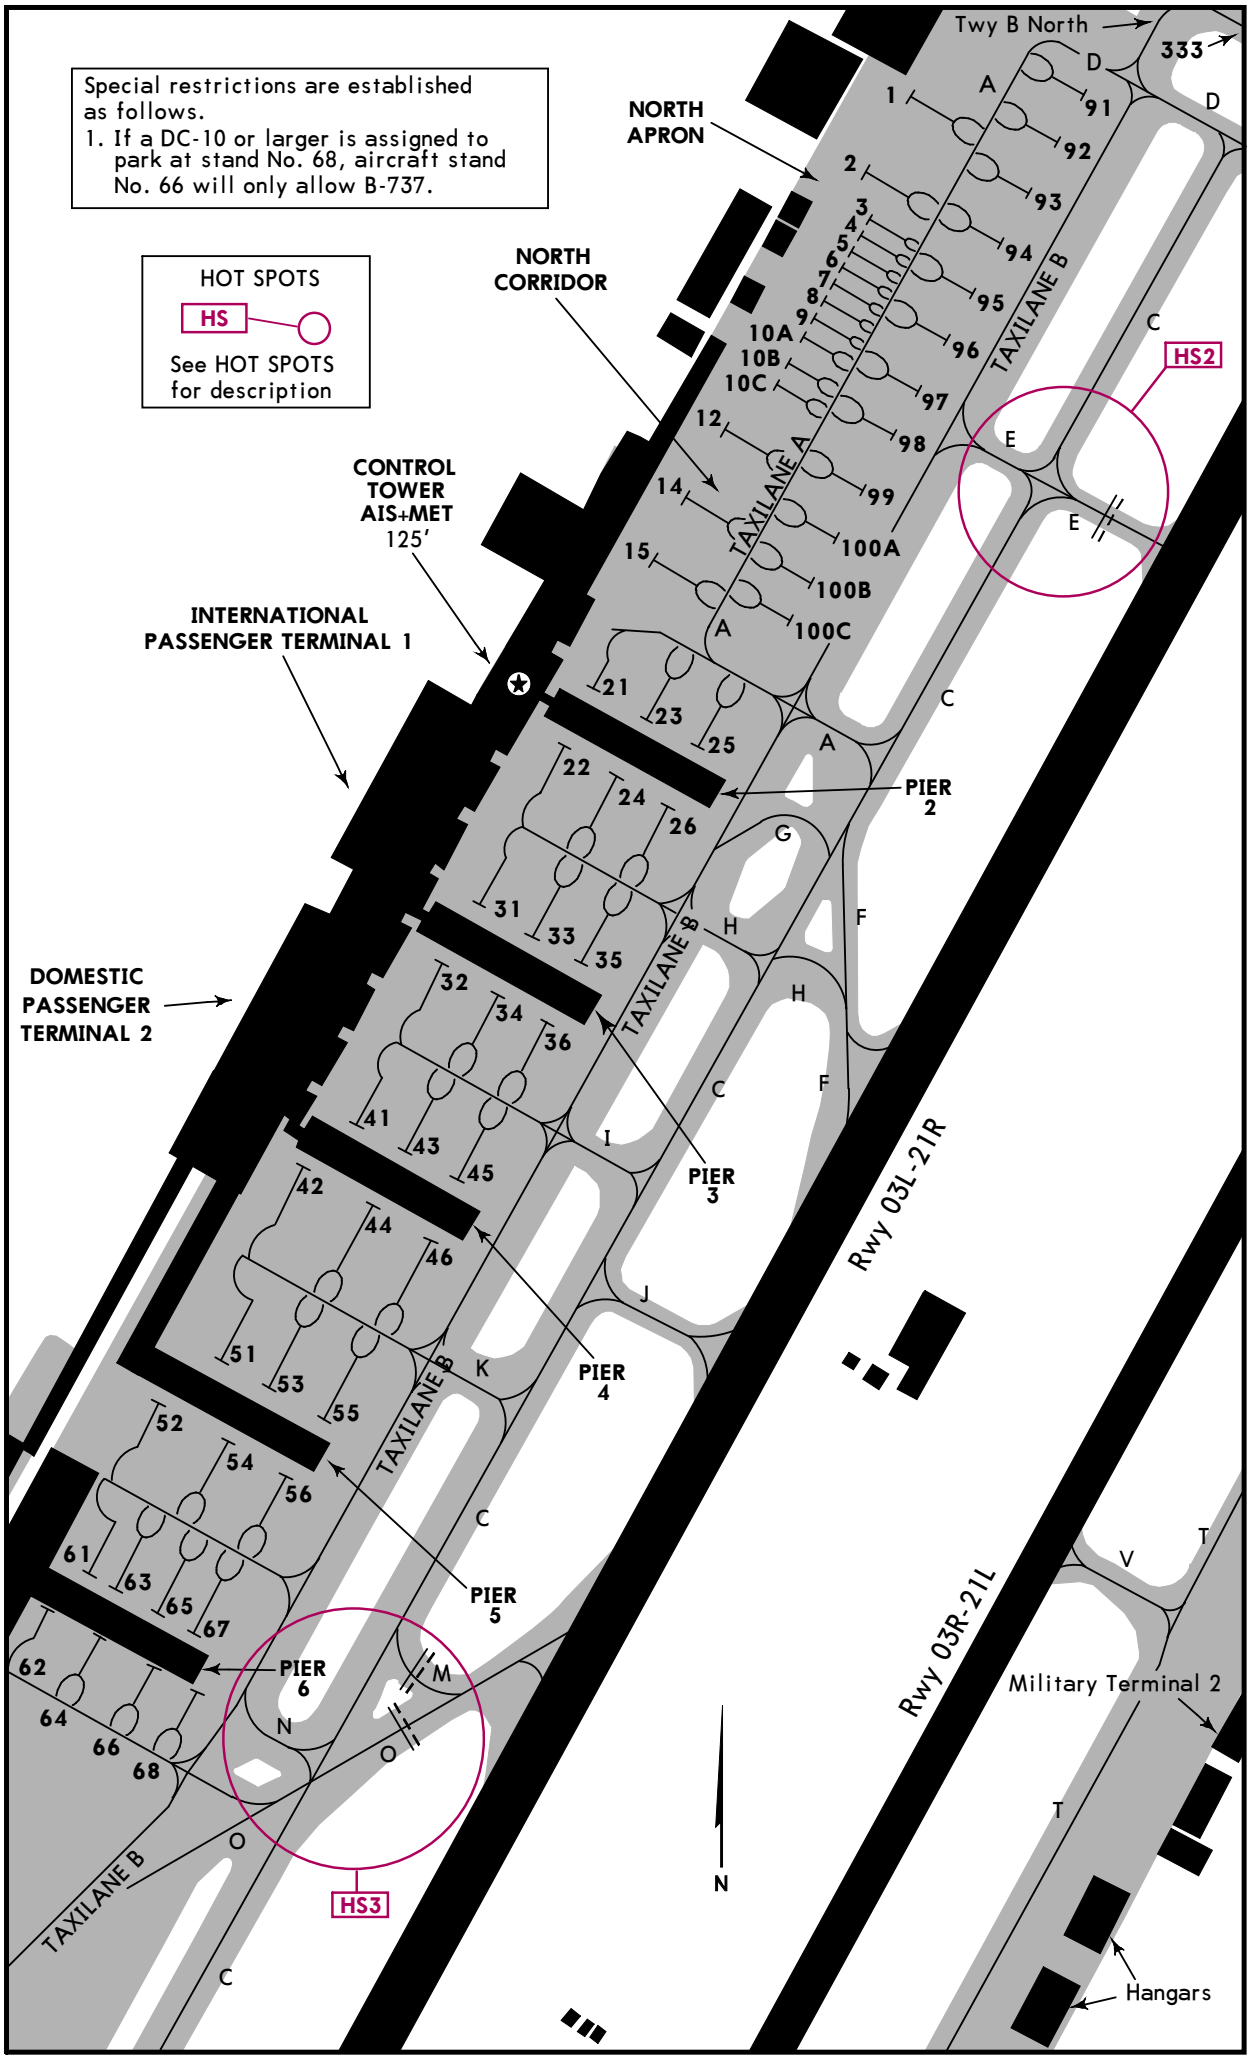

© JEPPESEN, 1998, 2025. ALL RIGHTS RESERVED.

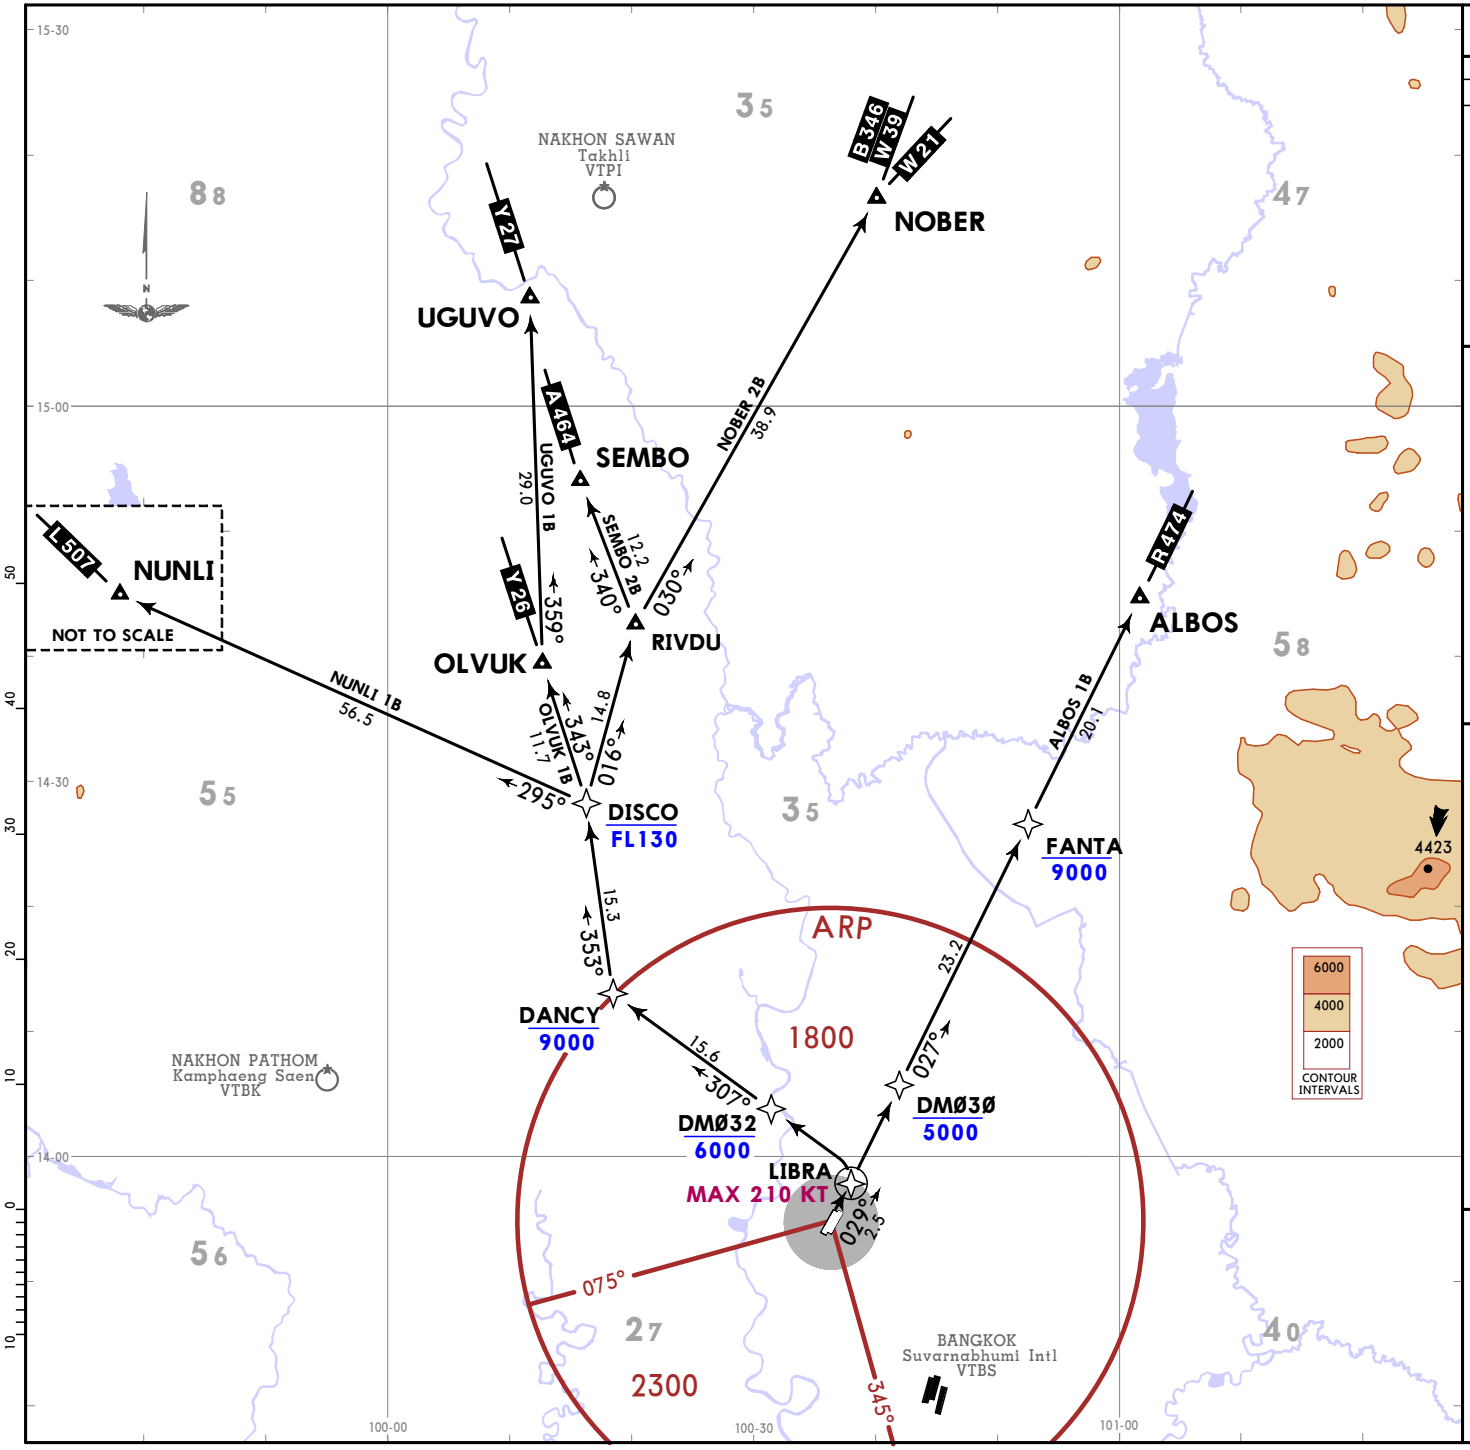

Apt Elev
9

Trans alt: 11000

RNAV1 required. GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure.
5. ALBOS 1B: Initial climb clearance 5000 or as directed by ATC. NOBER 2B, NUNLI 1B, OLVUK 1B, SEMBO 2B, UGUVO 1B: Initial climb clearance 6000 or as directed by ATC.

ALBOS 1B [ALBO1B]
NOBER 2B [NOBE2B]
NUNLI 1B [NUNL1B]
OLVUK 1B [OLVU1B]
SEMBO 2B [SEMB2B]
UGUVO 1B [UGUV1B]
RNAV DEPARTURES
(RWY 03L)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS


1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the pilot shall proceed in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

These SIDs require a minimum climb gradient of: 255 FT/NM (4.2%) until passing LIBRA.

Gnd speed-KT	75	100	150	200	250	300
255 FT/NM	319	425	638	850	1063	1275

CHANGES: Procedures UGUVO 1B established, procedure RIVDU 1B withdrawn.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

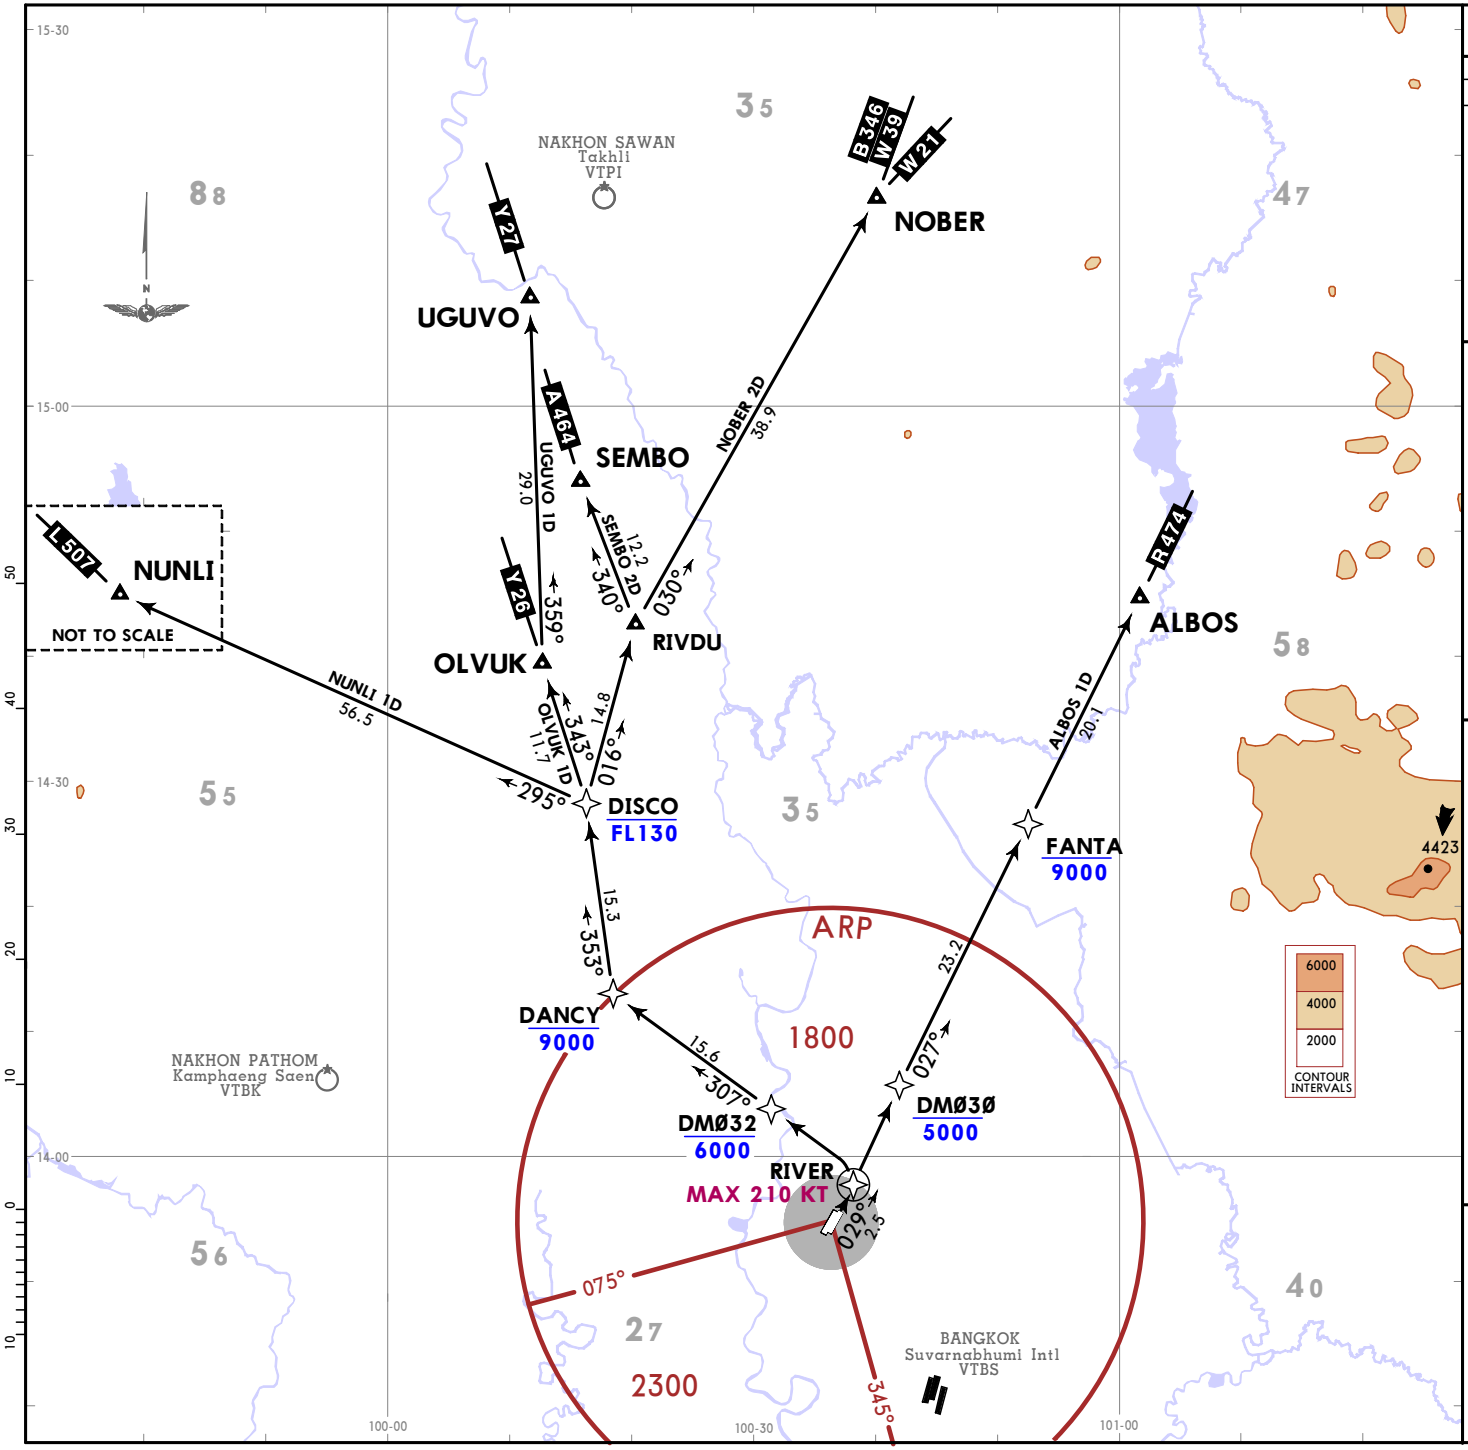

Apt Elev
9

Trans alt: 11000

RNAV1 required. GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure.
5. ALBOS 1D: Initial climb clearance 5000 or as directed by ATC. NOBER 2D, NUNLI 1D, OLVUK 1D, SEMBO 2D, UGUVO 1D: Initial climb clearance 6000 or as directed by ATC.

ALBOS 1D [ALBO1D]
NOBER 2D [NOBE2D]
NUNLI 1D [NUNL1D]
OLVUK 1D [OLVU1D]
SEMBO 2D [SEMB2D]
UGUVO 1D [UGUV1D]
RNAV DEPARTURES
(RWY 03R)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS


1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the pilot shall proceed in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

NOBER 2D, NUNLI 1D, OLVUK 1D, SEMBO 2D, UGUVO 1D:
These SIDs require a minimum climb gradient of:
255 FT/NM (4.2%) until passing RIVER.

Gnd speed-KT	75	100	150	200	250	300
255 FT/NM	319	425	638	850	1063	1275

CHANGES: Procedures UGUVO 1D established, procedure RIVDU 1D withdrawn.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

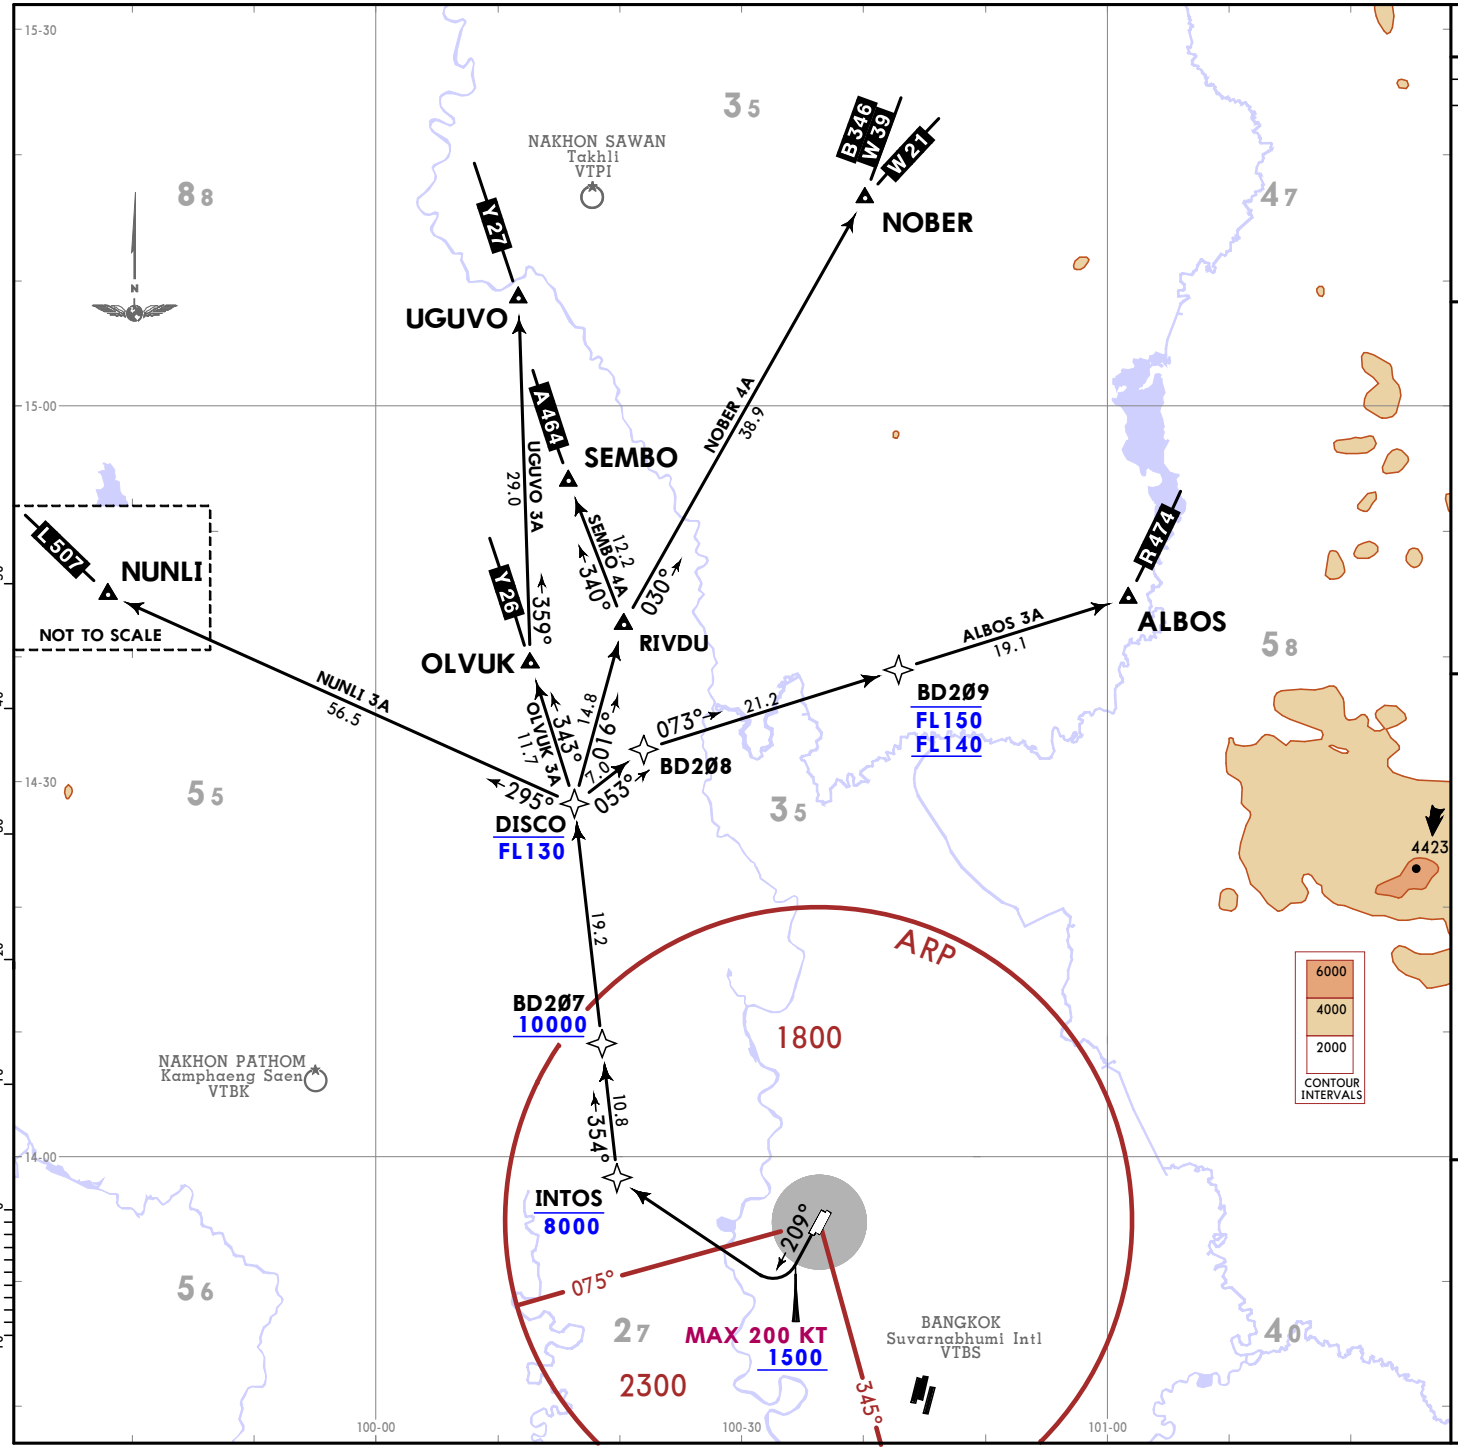

Apt Elev
9

Trans alt: 11000

RNAV1 required. GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure.
5. No turn before DER.
6. Initial climb clearance 8000 or as directed by ATC.

ALBOS 3A [ALBO3A]
NOBER 4A [NOBE4A]
NUNLI 3A [NUNL3A]
OLVUK 3A [OLVU3A]
SEMBO 4A [SEMB4A]
UGUVO 3A [UGUV3A]
RNAV DEPARTURES
(RWY 21R)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS


1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the pilot shall proceed in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

These SIDs require a minimum climb gradient of: 450 FT/NM (7.4%) until passing 1500 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
450 FT/NM	563	750	1125	1500	1875	2250

CHANGES: Procedures UGUVO 3A established, procedure RIVDU 3A withdrawn.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

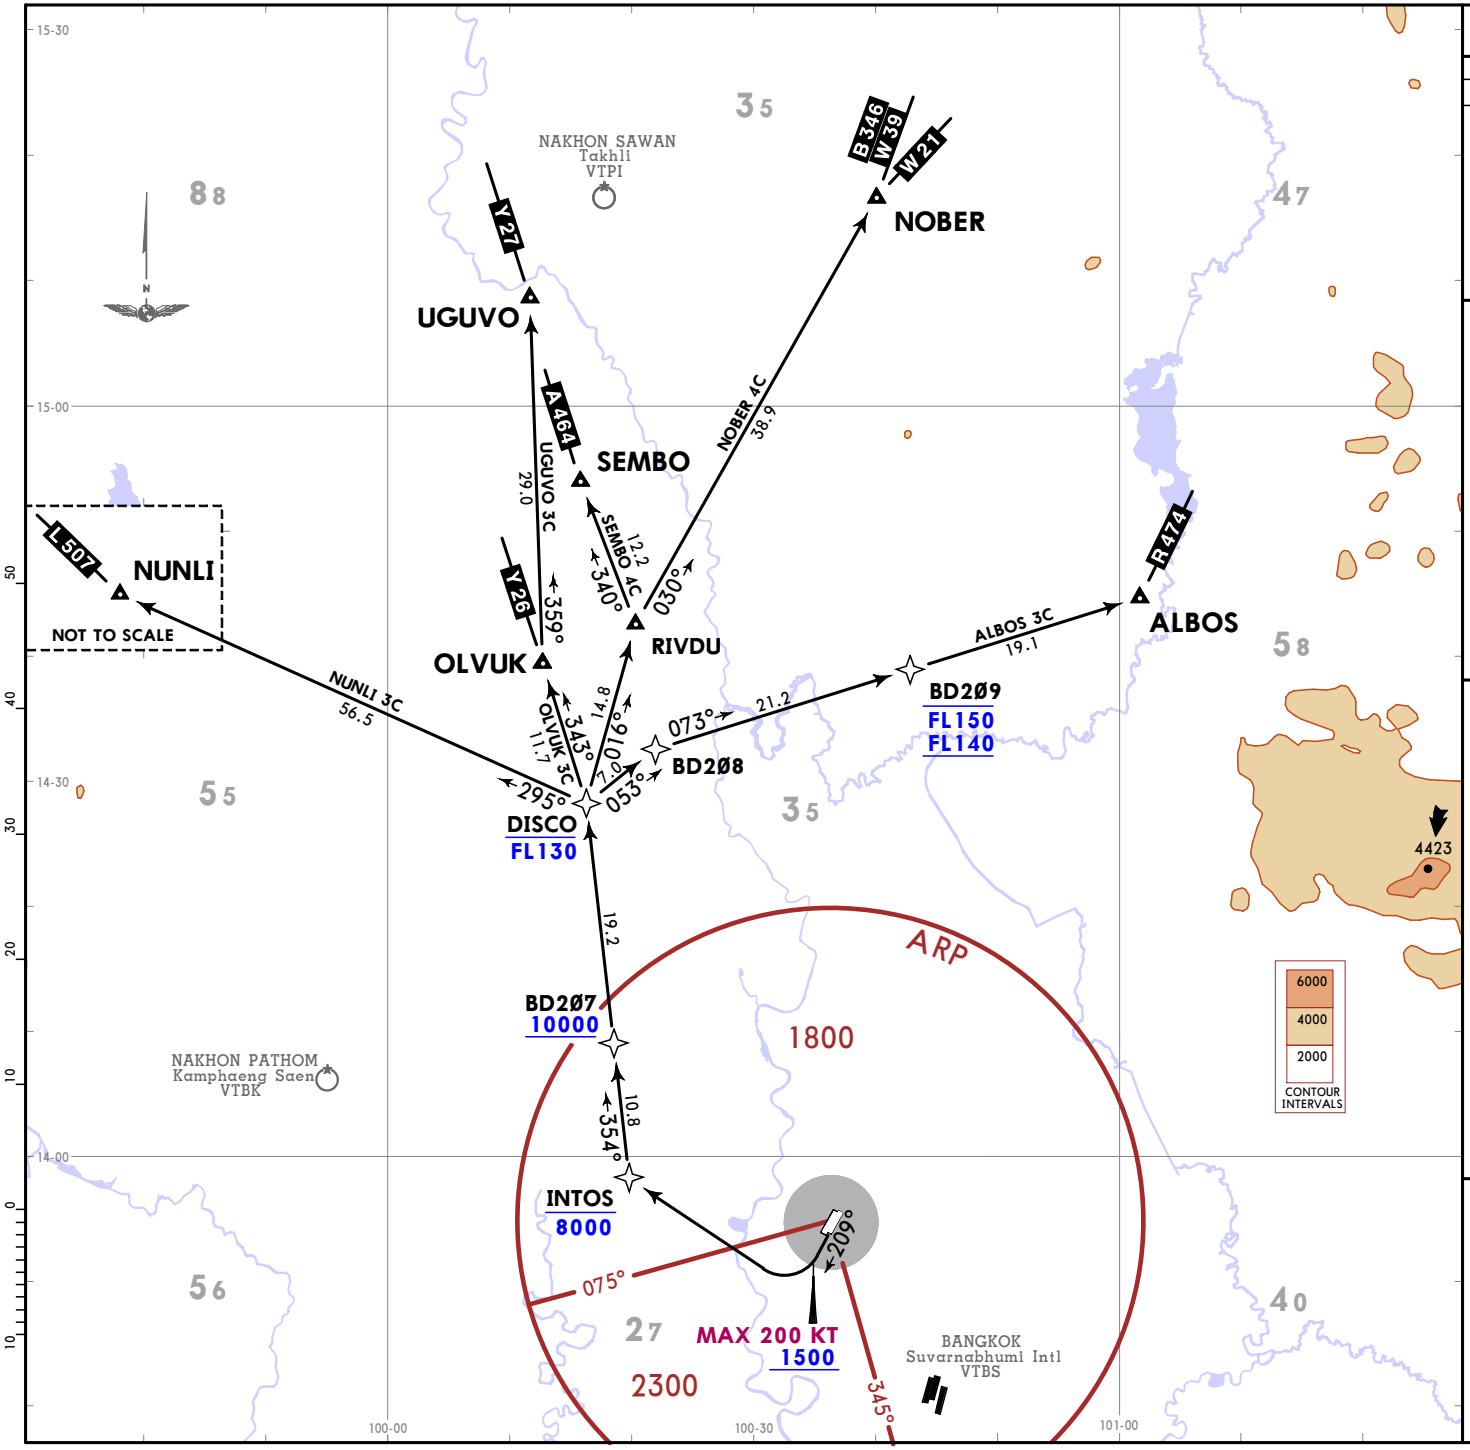

Apt Elev
9

Trans alt: 11000

RNAV1 required. GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance.
3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC.
4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure.
5. No turn before DER.
6. Initial climb clearance 8000 or as directed by ATC.

ALBOS 3C [ALBO3C]
NOBER 4C [NOBE4C]
NUNLI 3C [NUNL3C]
OLVUK 3C [OLVU3C]
SEMBO 4C [SEMB4C]
UGUVO 3C [UGUV3C]
RNAV DEPARTURES
(RWY 21L)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS


1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the pilot shall proceed in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

These SIDs require a minimum climb gradient of: 425 FT/NM (7.0%) until passing 1500 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
425 FT/NM	531	708	1063	1417	1771	2125

CHANGES: Procedures UGUVO 3C established, procedure RIVDU 3C withdrawn.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

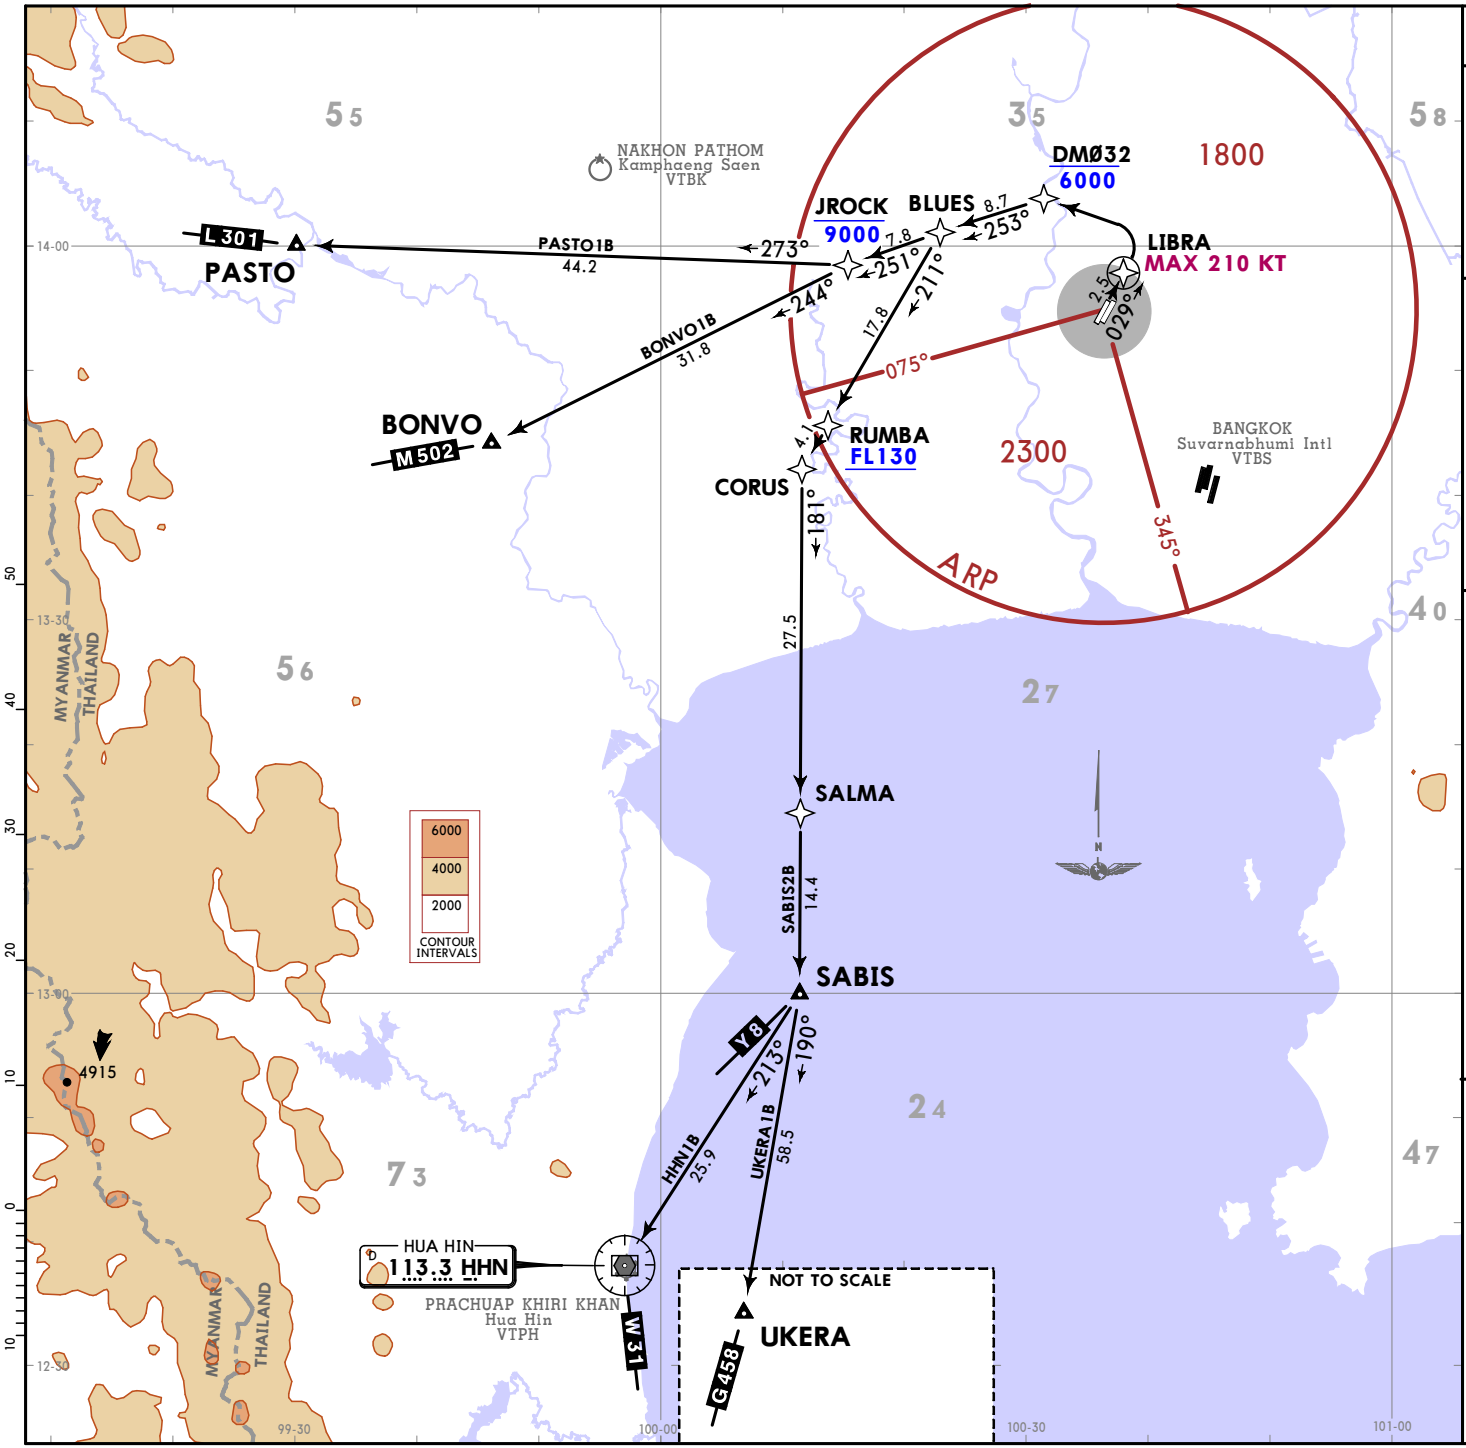

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. Initial climb clearance 6000 or as directed by ATC.

BONVO1B [BONV1B]
HHN1B [HHN1B]
PASTO1B [PAST1B]
SABIS2B [SABI2B]
UKERA1B [UKER1B]
RWY 03L RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

These SIDs require minimum climb gradients of BONVO1B, PASTO1B: 255 per NM (4.2%) until passing LIBRA.
HHN1B, SABIS2B, UKERA1B: 352 per NM (5.8%) until FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
255 per NM	319	425	638	850	1063	1275
352 per NM	440	587	880	1173	1467	1760

CHANGES: None.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

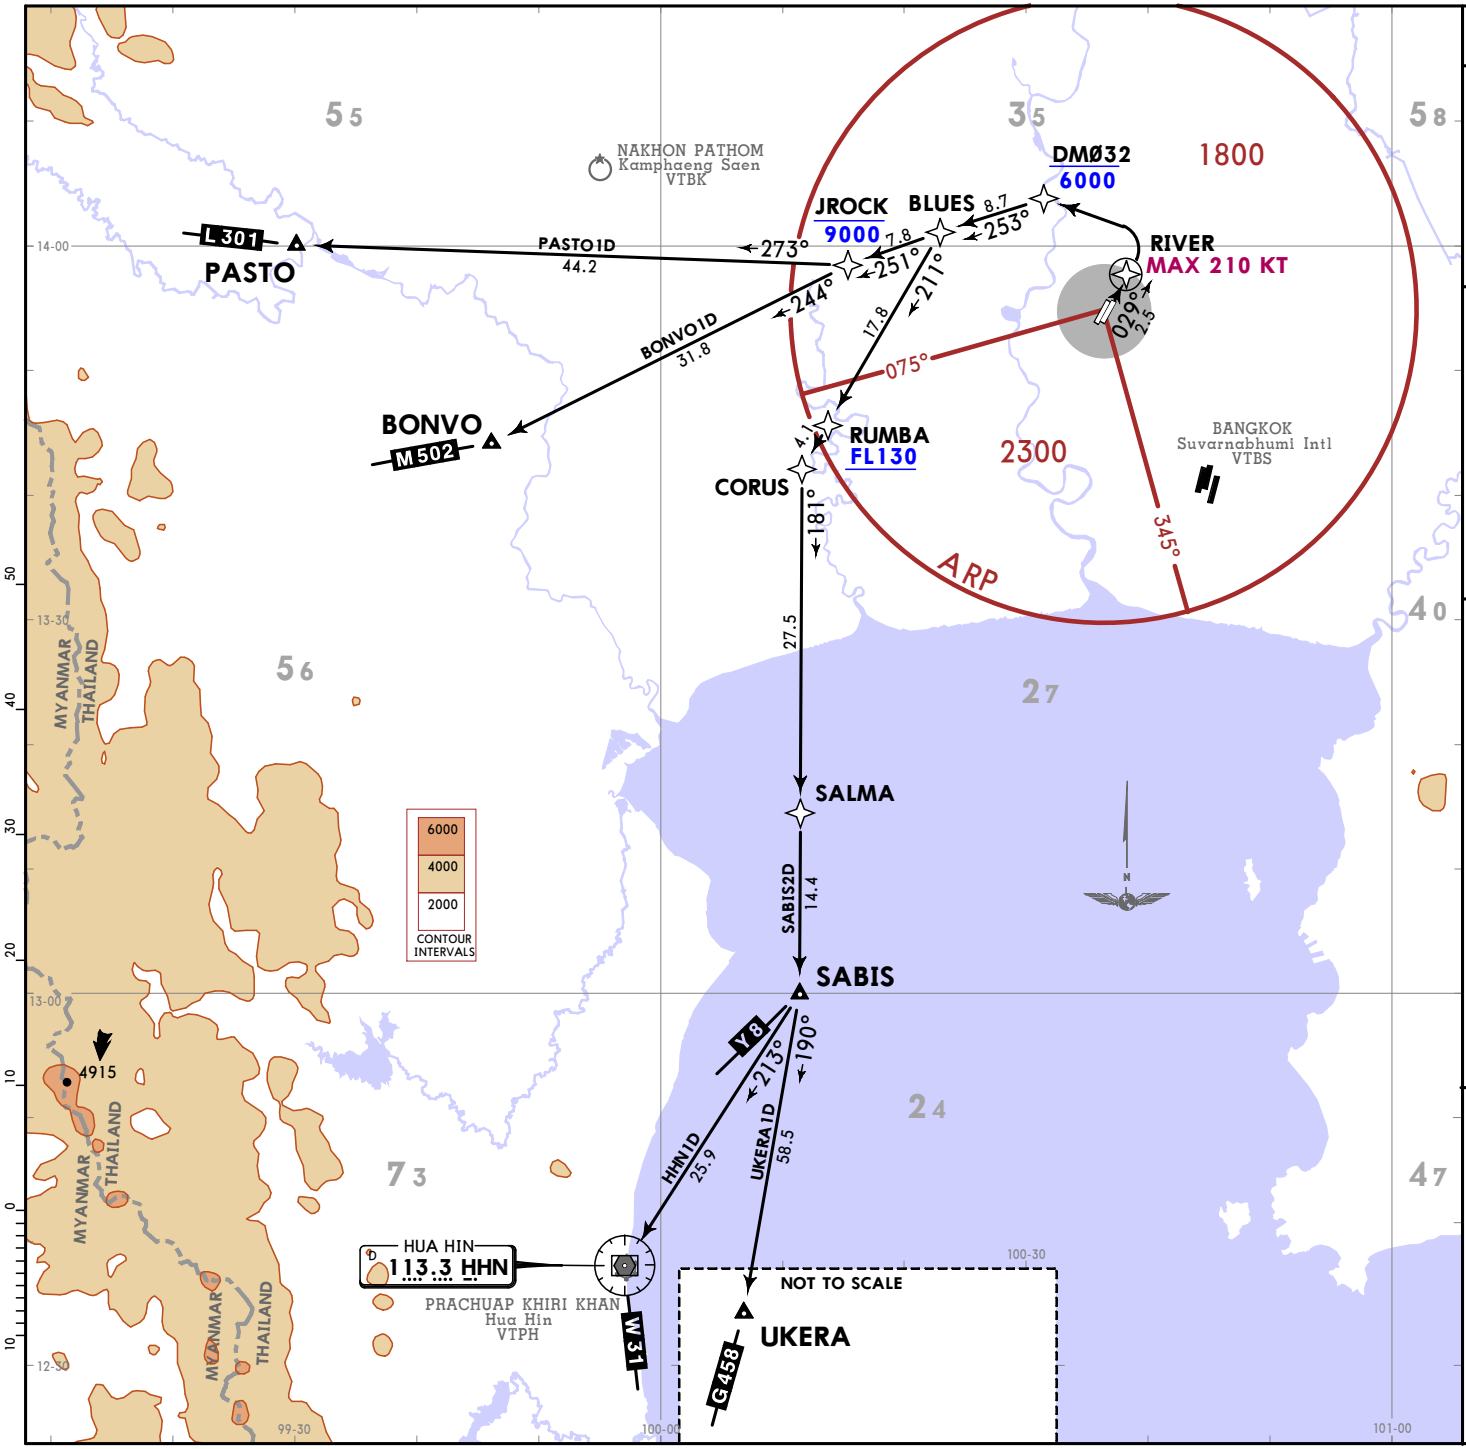

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. Initial climb clearance 6000 or as directed by ATC.

BONVO1D [BONV1D]
HHN1D [HHN1D]
PASTO1D [PAST1D]
SABIS2D [SABI2D]
UKERA1D [UKER1D]
RWY 03R RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require minimum climb gradients of BONVO1D, PASTO1D: 255 per NM (4.2%) until passing RIVER.
HHN1D, SABIS2D, UKERA1D: 352 per NM (5.8%) until FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
255 per NM	319	425	638	850	1063	1275
352 per NM	440	587	880	1173	1467	1760

CHANGES: None.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

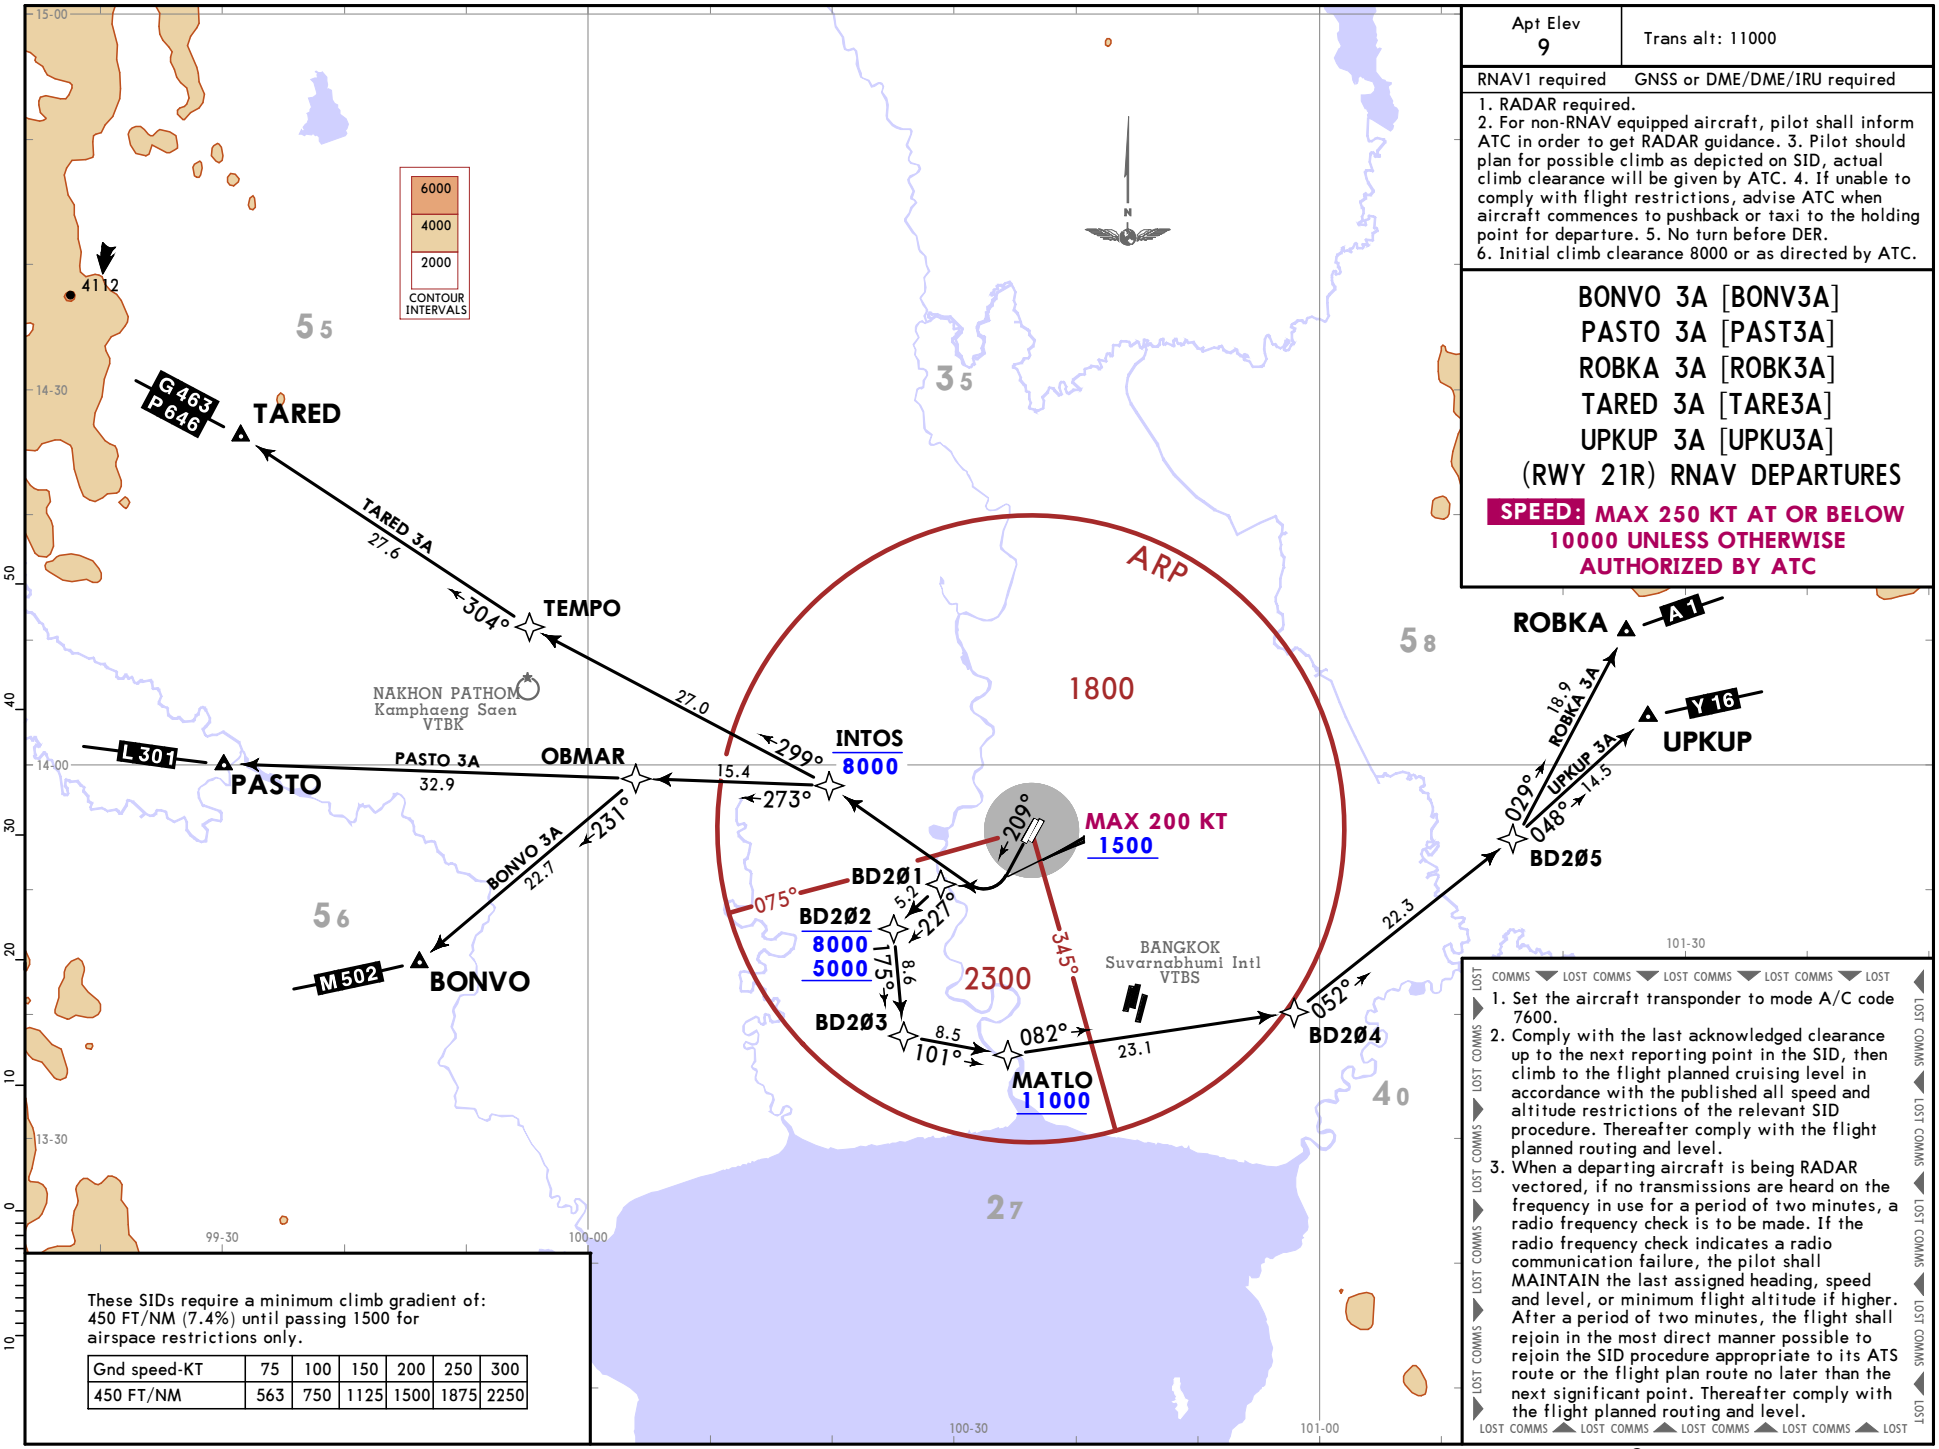

Apt Elev	Trans alt: 11000
9	

RNAV1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 5. No turn before DER.
6. Initial climb clearance 8000 or as directed by ATC.

BONVO 3A [BONV3A]
PASTO 3A [PAST3A]
ROBKA 3A [ROBK3A]
TARED 3A [TARE3A]
UPKUP 3A [UPKU3A]
(RWY 21R) RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

These SIDs require a minimum climb gradient of:
450 FT/NM (7.4%) until passing 1500 for airspace restrictions only.


Gnd speed-KT	75	100	150	200	250	300
450 FT/NM	563	750	1125	1500	1875	2250

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

CHANGES: Bearing from OBMAR to BONVO.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

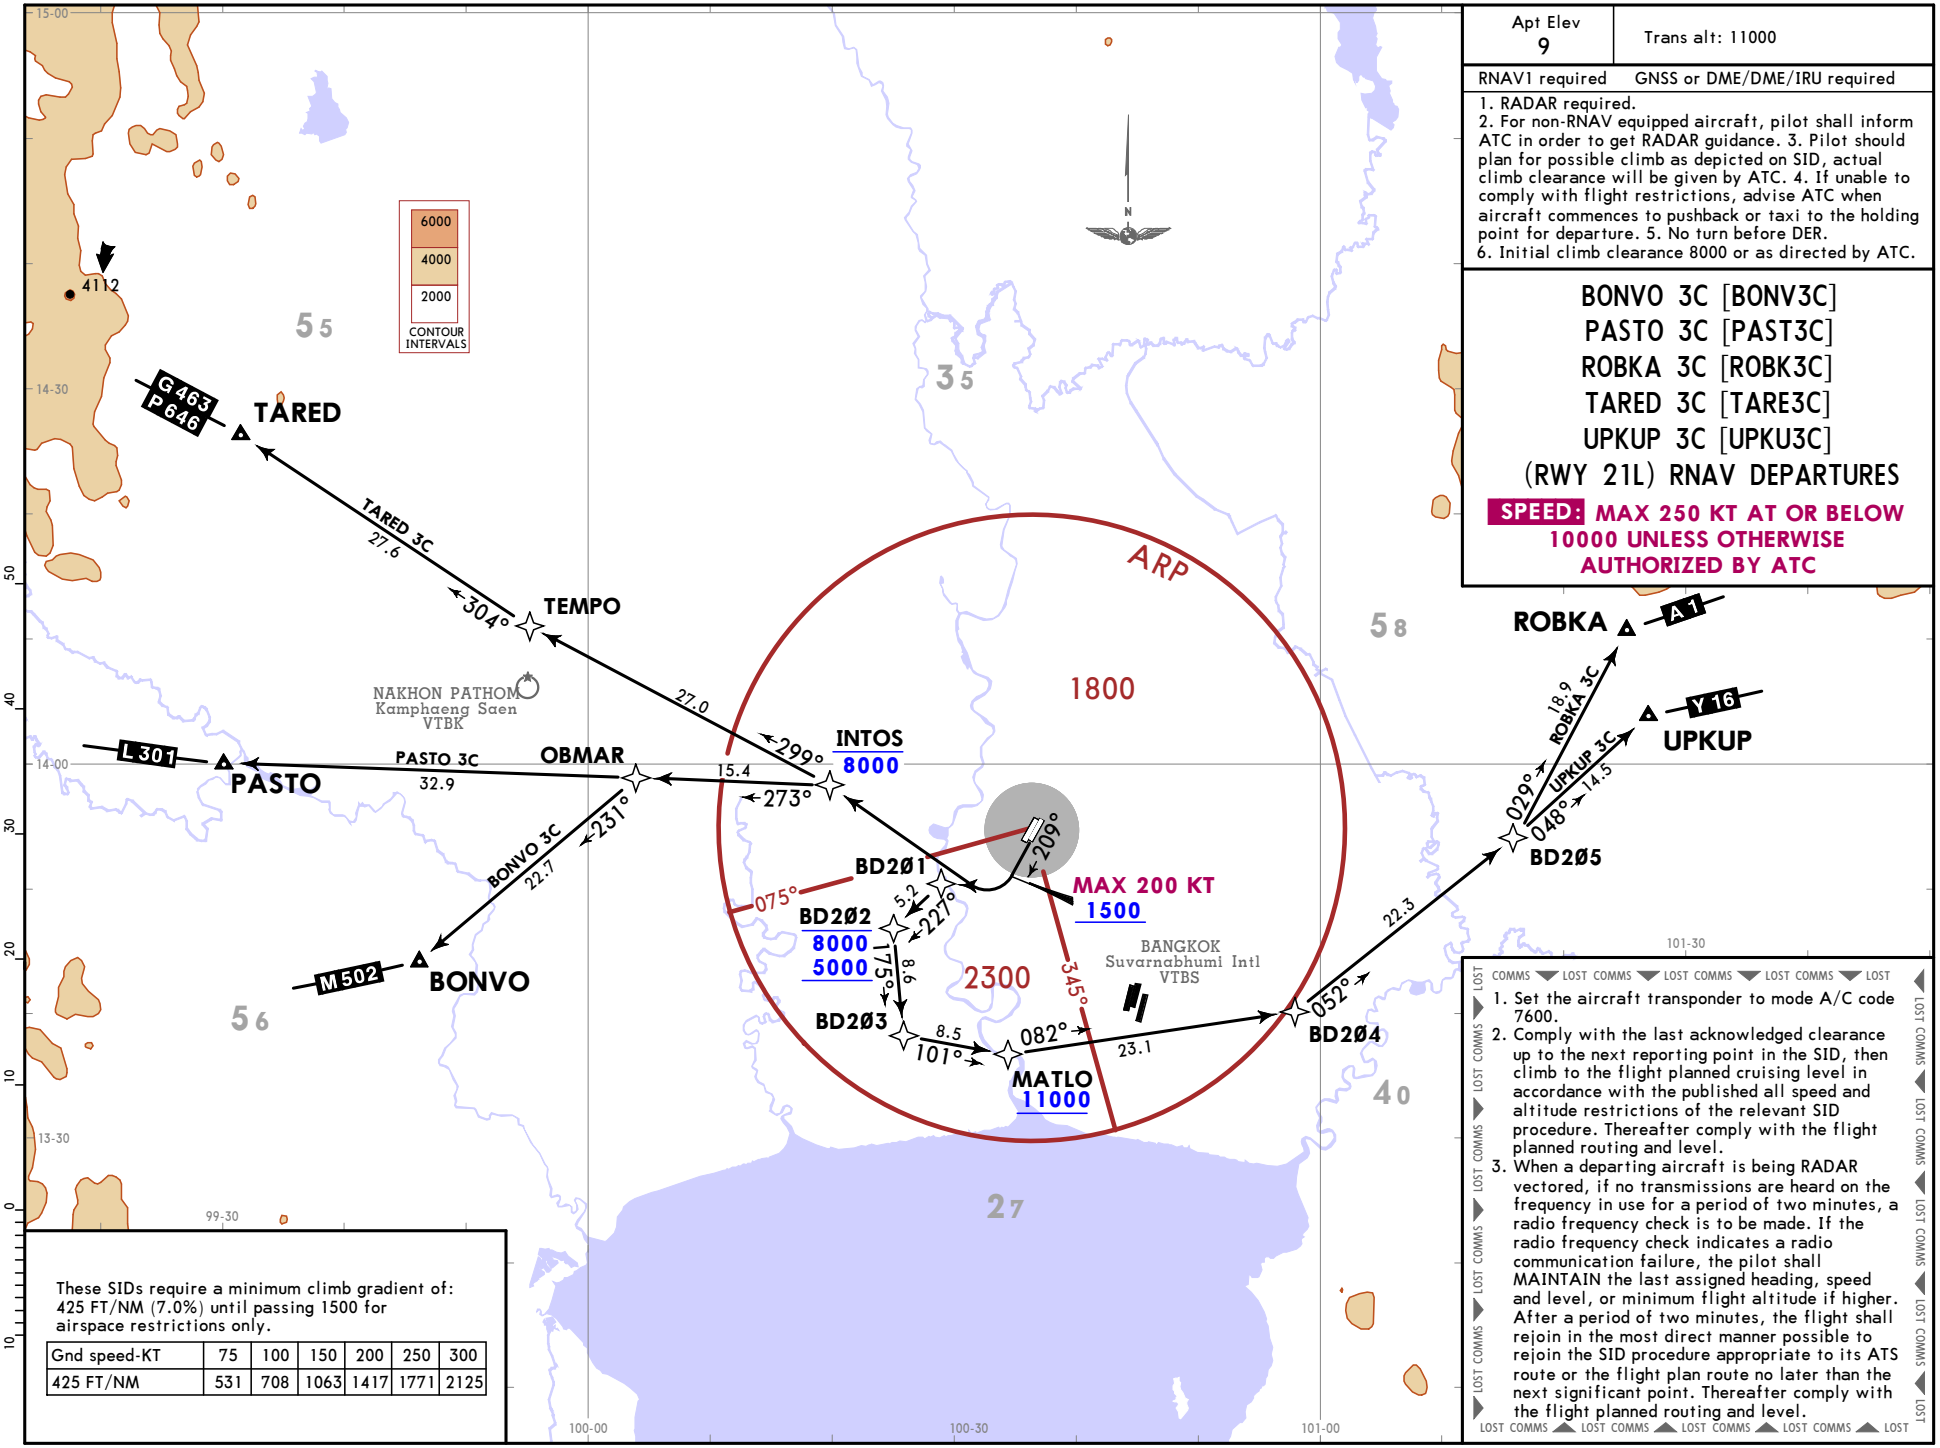

Apt Elev	Trans alt: 11000
9	

RNAV1 required GNSS or DME/DME/IRU required

1. RADAR required.
2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 4. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 5. No turn before DER.
6. Initial climb clearance 8000 or as directed by ATC.

BONVO 3C [BONV3C]
PASTO 3C [PAST3C]
ROBKA 3C [ROBK3C]
TARED 3C [TARE3C]
UPKUP 3C [UPKU3C]
(RWY 21L) RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

These SIDs require a minimum climb gradient of: 425 FT/NM (7.0%) until passing 1500 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
425 FT/NM	531	708	1063	1417	1771	2125


COMMS LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

LOST COMMS

CHANGES: Bearing from OBMAR to BONVO.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

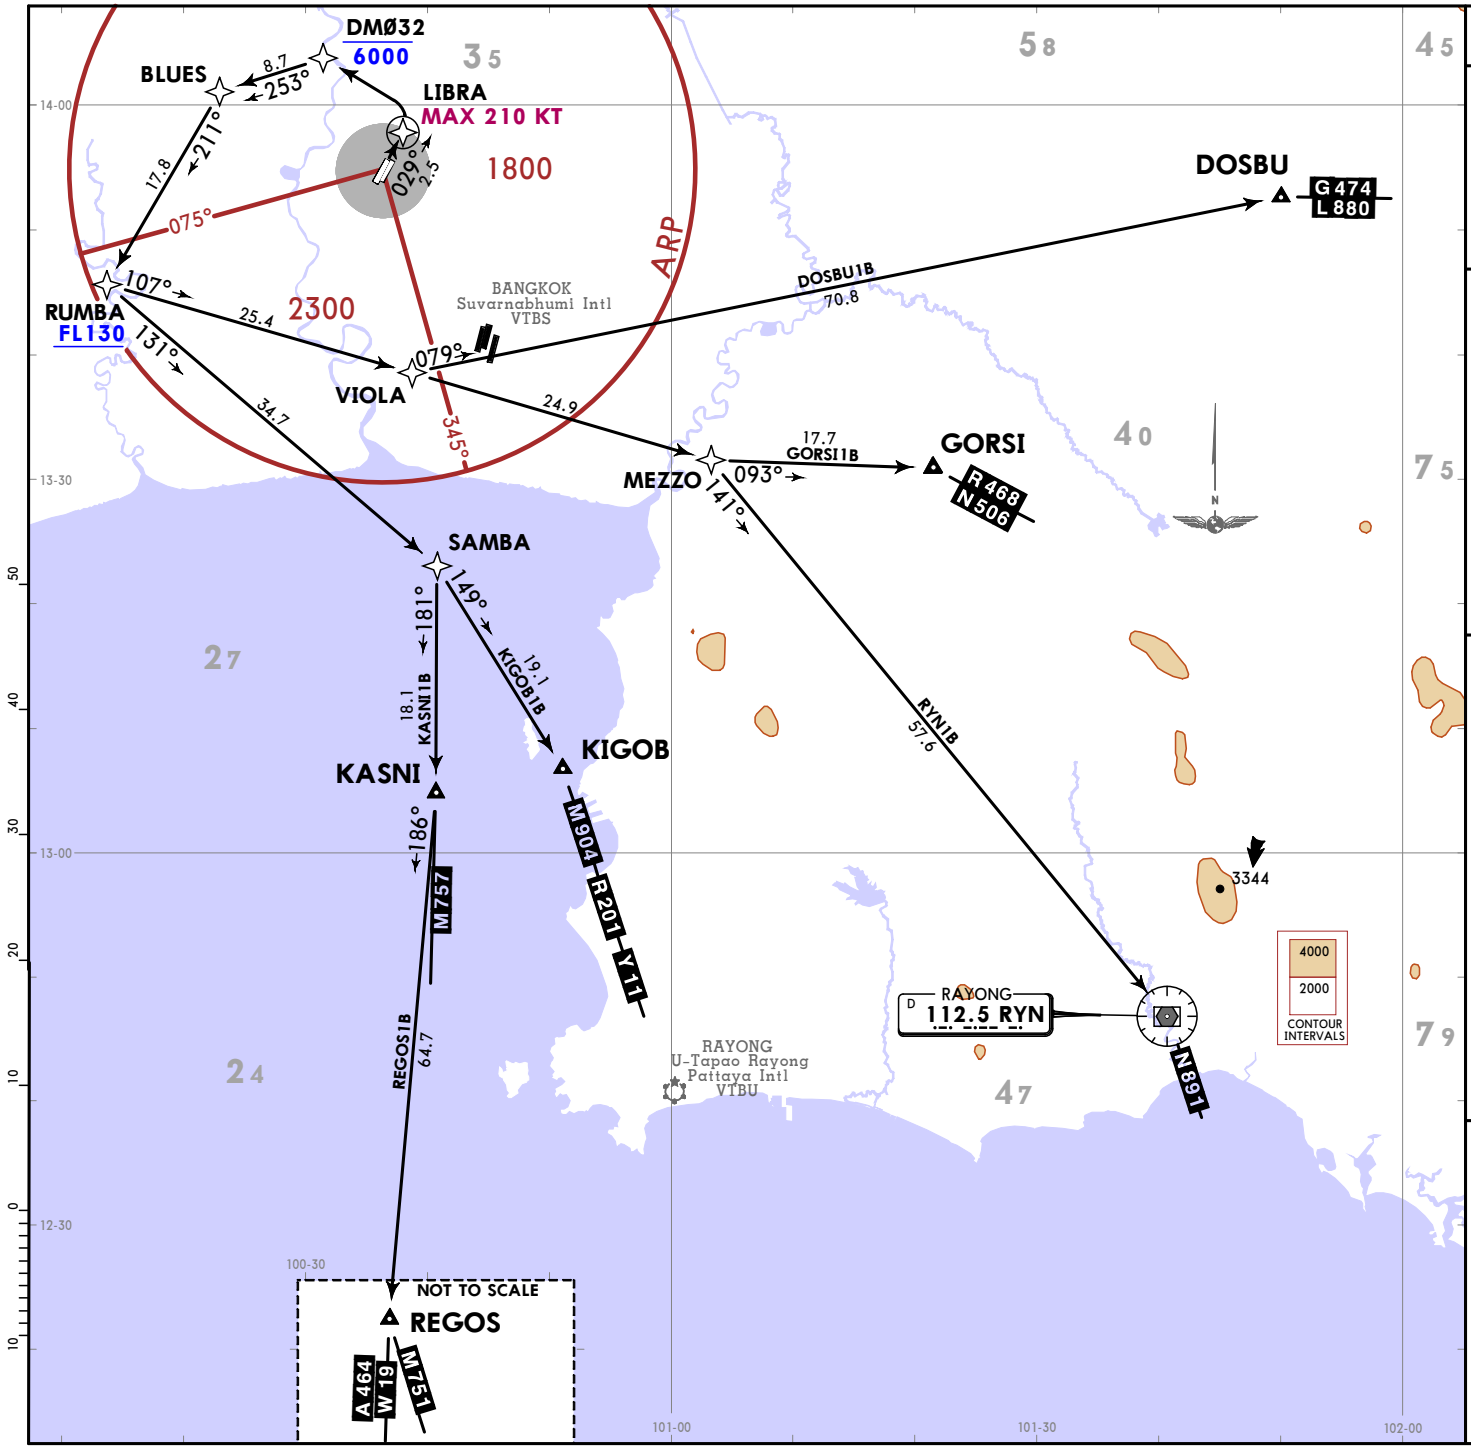

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. Initial climb clearance 6000 or as directed by ATC.

DOSBU1B [DOSB1B]
GORSI1B [GORS1B]
KASNI1B [KASN1B]
KIGOB1B [KIGO1B]
REGOS1B [REGO1B]
RYN1B [RYN1B]

RWY 03L RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require a minimum climb gradient of 352 per NM (5.8%) until FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
352 per NM	440	587	880	1173	1467	1760

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

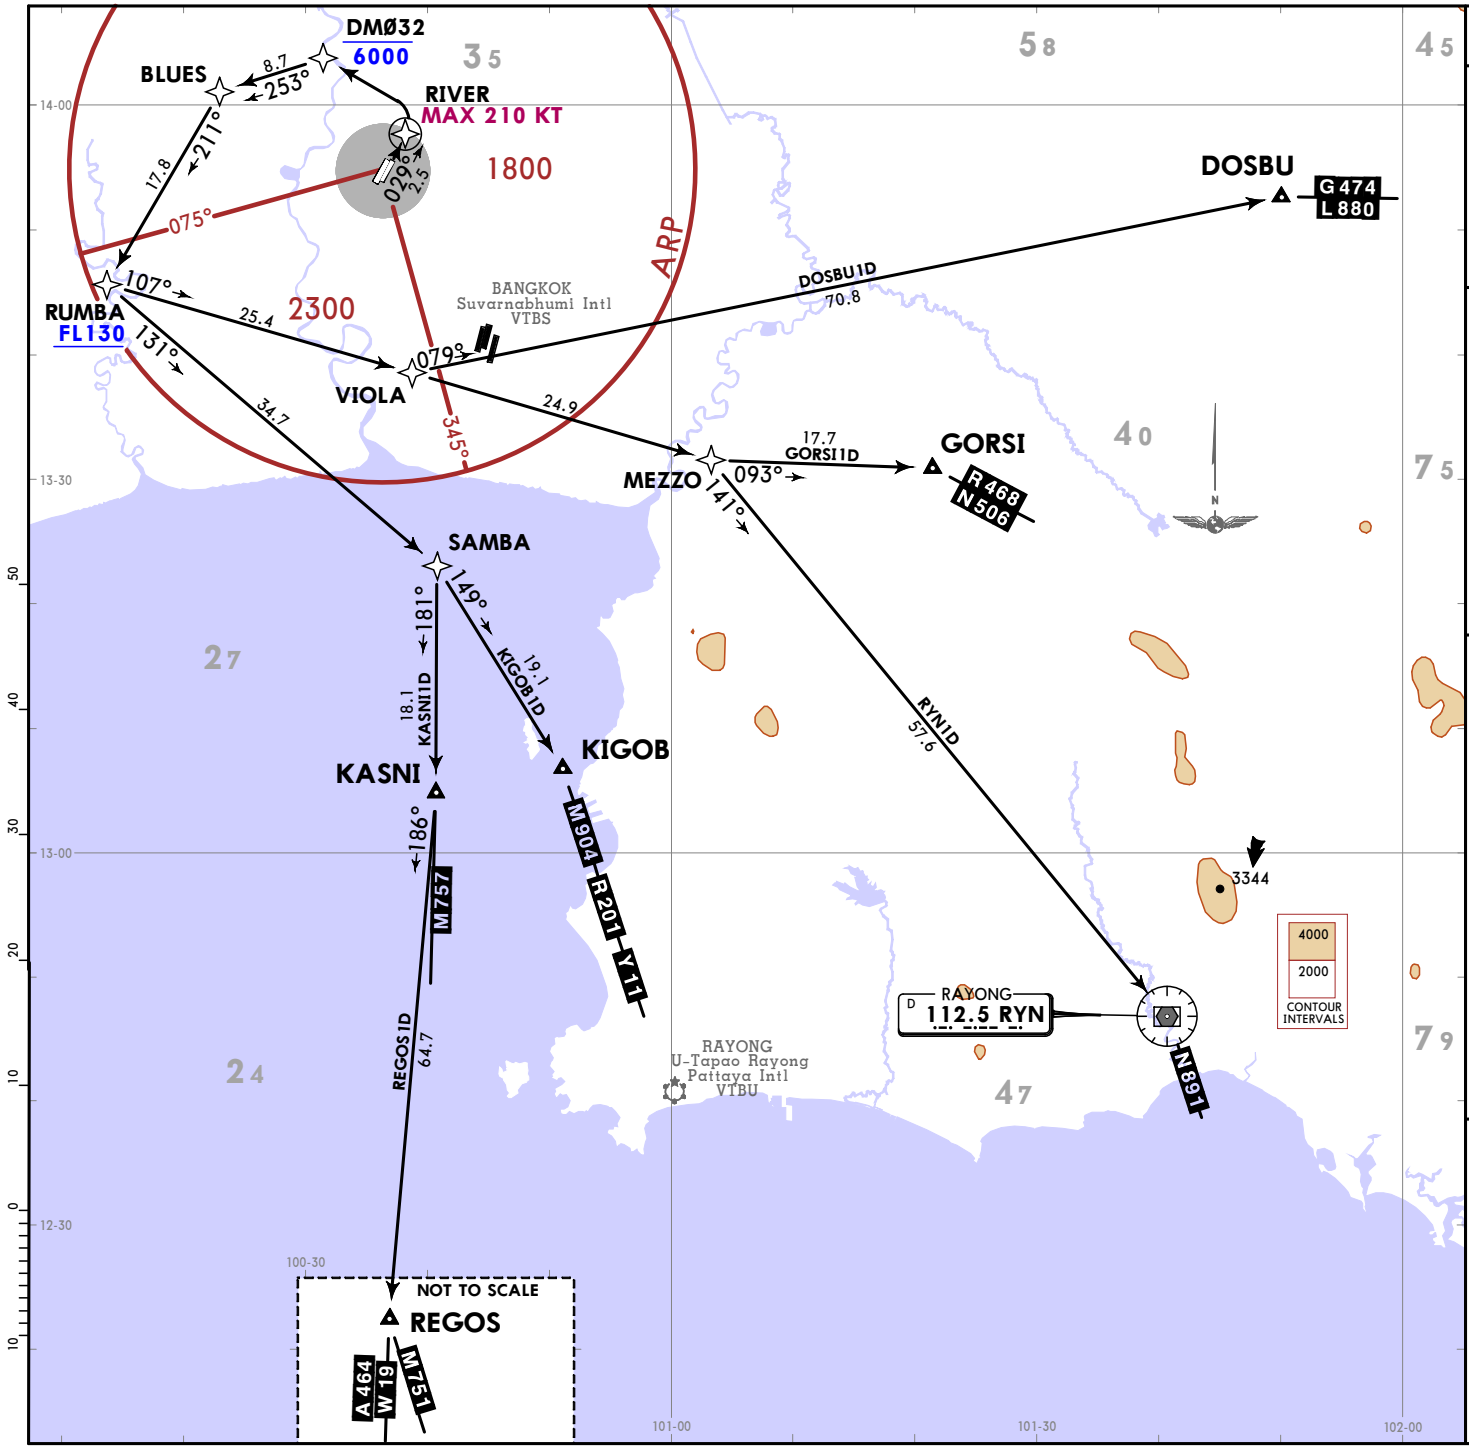

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. Initial climb clearance 6000 or as directed by ATC.

DOSBU1D [DOSB1D]
GORSI1D [GORS1D]
KASNI1D [KASN1D]
KIGOB1D [KIGO1D]
REGOS1D [REGO1D]
RYN1D [RYN1D]
RWY 03R RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

These SIDs require a minimum climb gradient of 352 per NM (5.8%) until FL130 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
352 per NM	440	587	880	1173	1467	1760

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

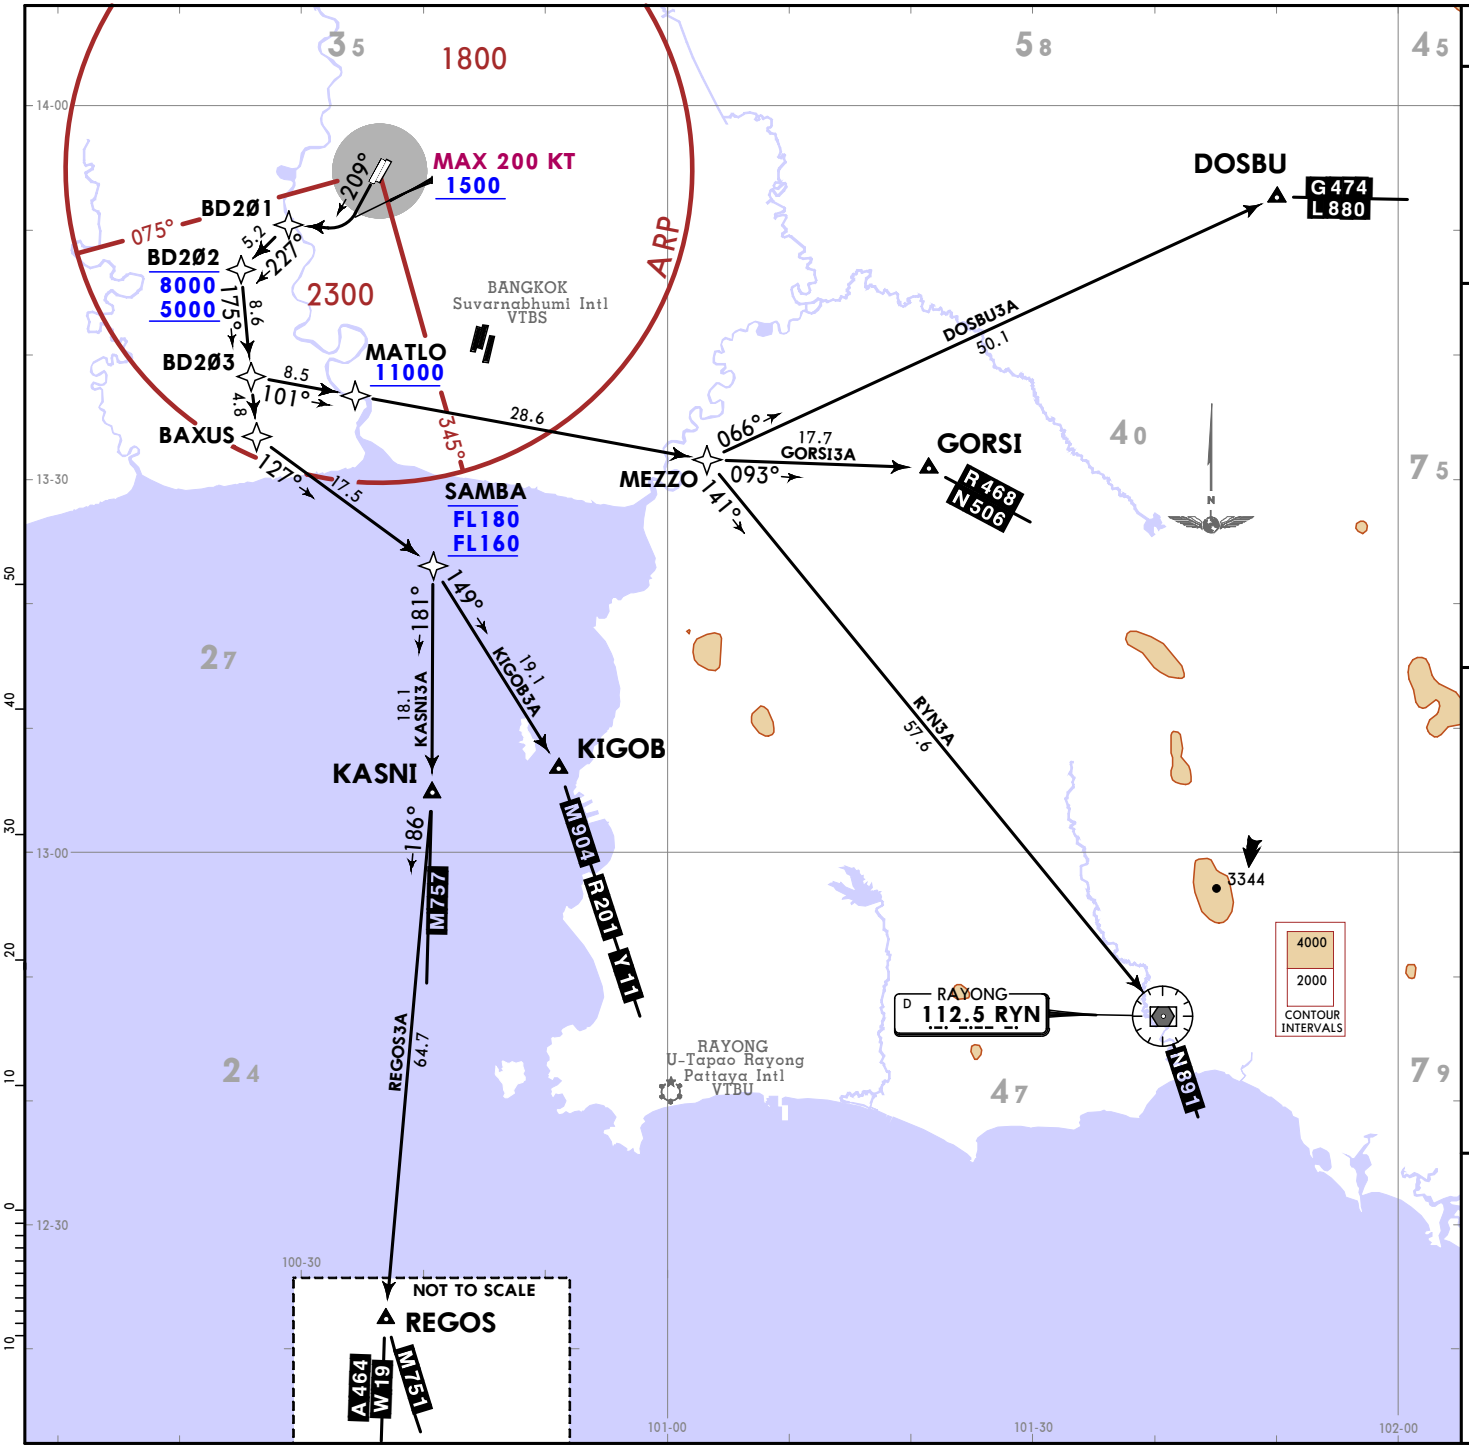

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. No turn before DER. 8. Initial climb clearance 8000 or as directed by ATC.

DOSBU3A [DOSB3A]
GORSI3A [GORS3A]
KASNI3A [KASN3A]
KIGOB3A [KIGO3A]
REGOS3A [REGO3A]
RYN3A [RYN3A]

RWY 21R RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require a minimum climb gradient of 450 per NM (7.4%) until passing 1500 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
450 per NM	563	750	1125	1500	1875	2250

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

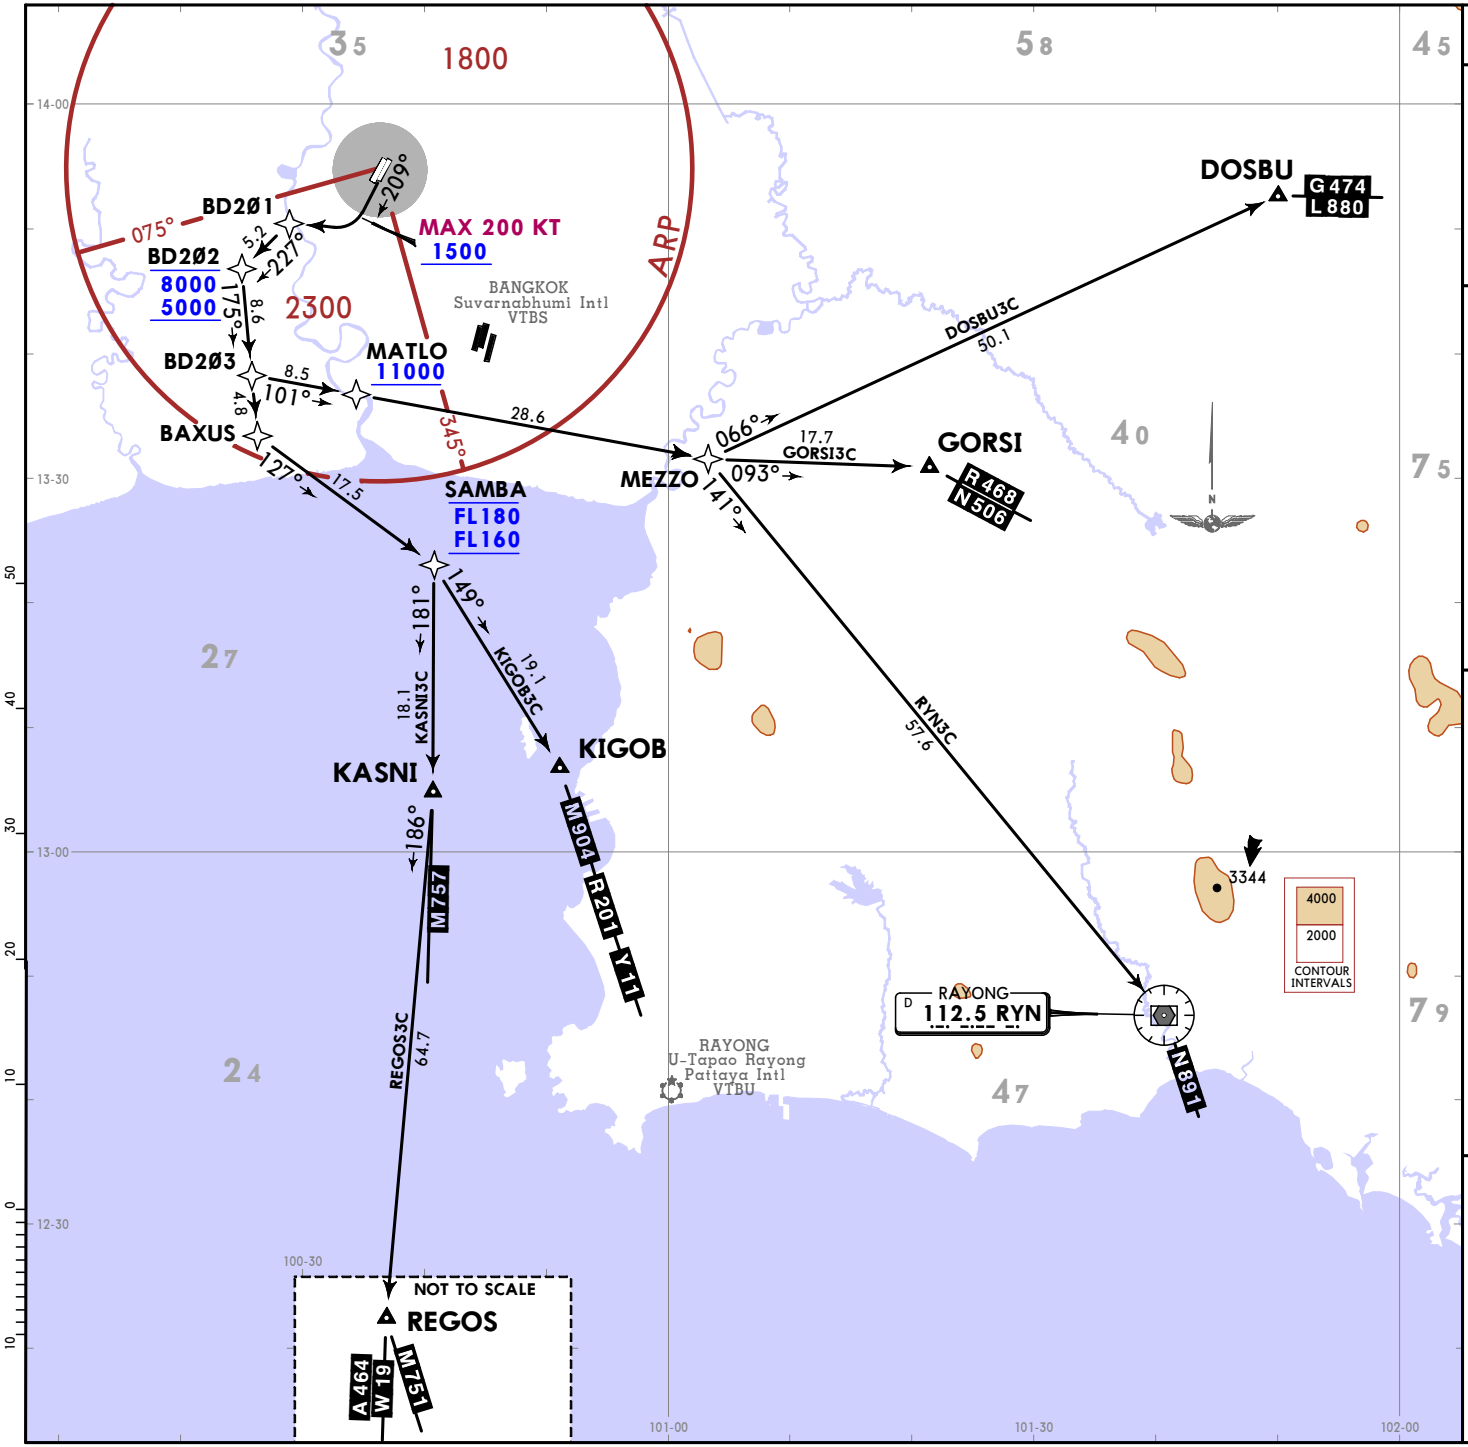

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. No turn before DER.
8. Initial climb clearance 8000 or as directed by ATC.

DOSBU3C [DOSB3C]
GORSI3C [GORS3C]
KASNI3C [KASN3C]
KIGOB3C [KIGO3C]
REGOS3C [REGO3C]
RYN3C [RYN3C]

RWY 21L RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require a minimum climb gradient of 425 per NM (7.0%) until passing 1500 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
425 per NM	531	708	1063	1417	1771	2125

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

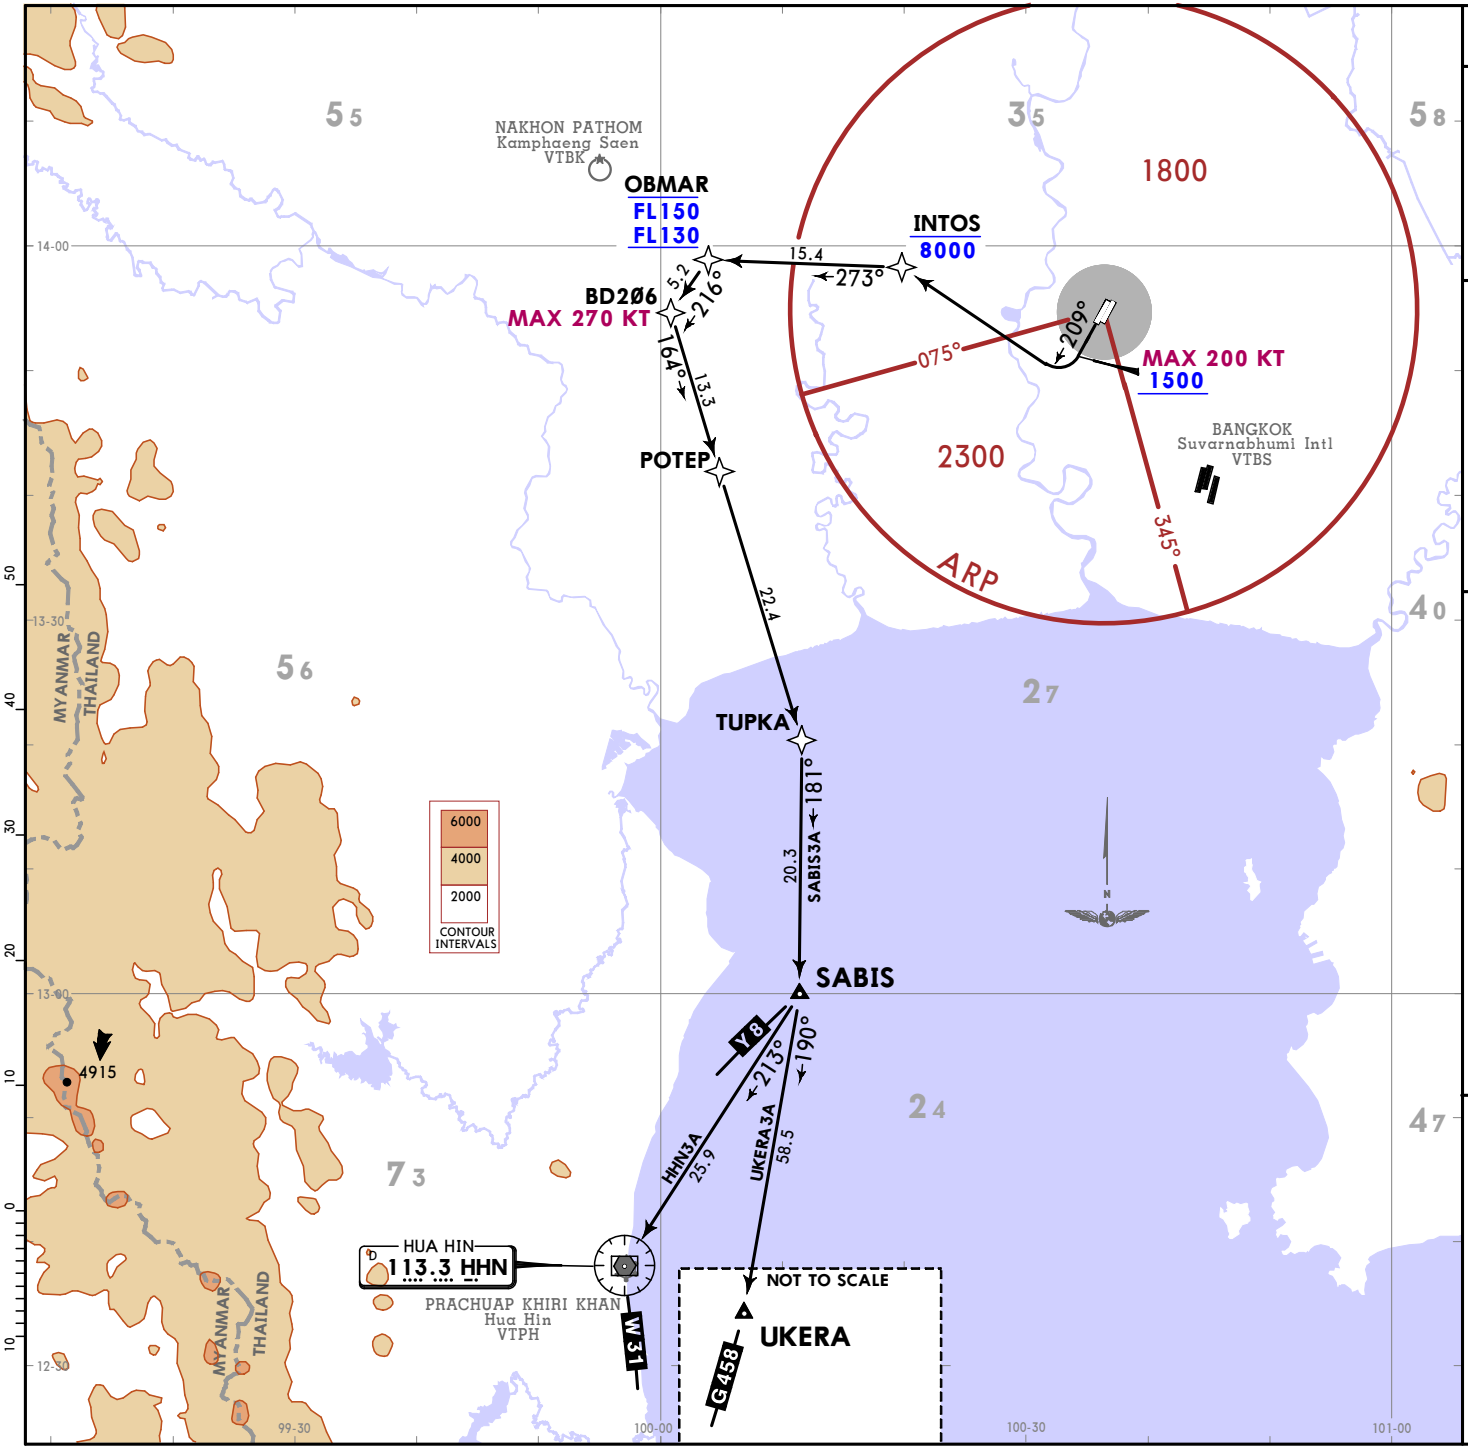

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. No turn before DER.
8. Initial climb clearance 8000 or as directed by ATC.

HHN3A [HHN3A]
SABIS3A [SABI3A]
UKERA3A [UKER3A]
RWY 21R RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require a minimum climb gradient of 450 per NM (7.4%) until INTOS for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
450 per NM	563	750	1125	1500	1875	2250

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

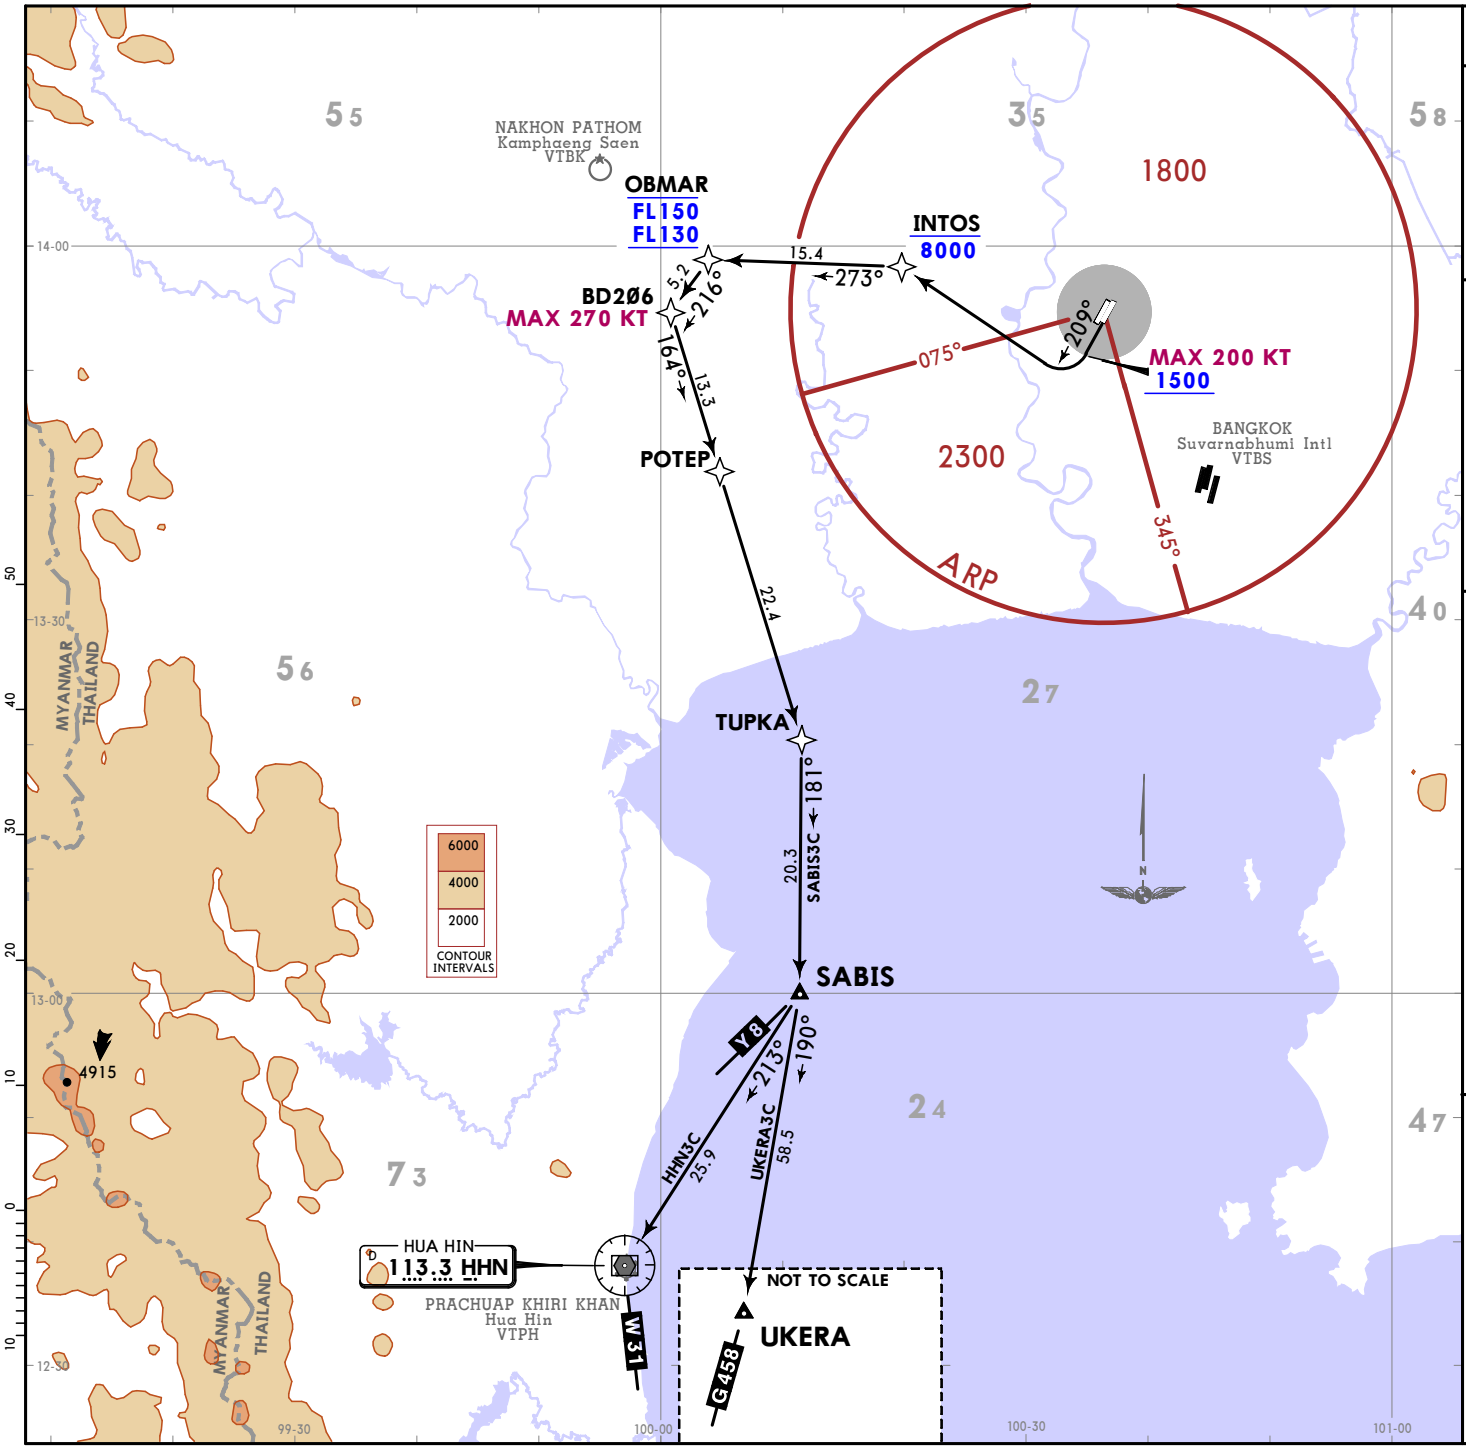

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. No turn before DER.
8. Initial climb clearance 8000 or as directed by ATC.

HHN3C [HHN3C]
SABIS3C [SABI3C]
UKERA3C [UKER3C]
RWY 21L RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.


LOST COMMS

These SIDs require a minimum climb gradient of 425 per NM (7.0%) until INTOS for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
425 per NM	531	708	1063	1417	1771	2125

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

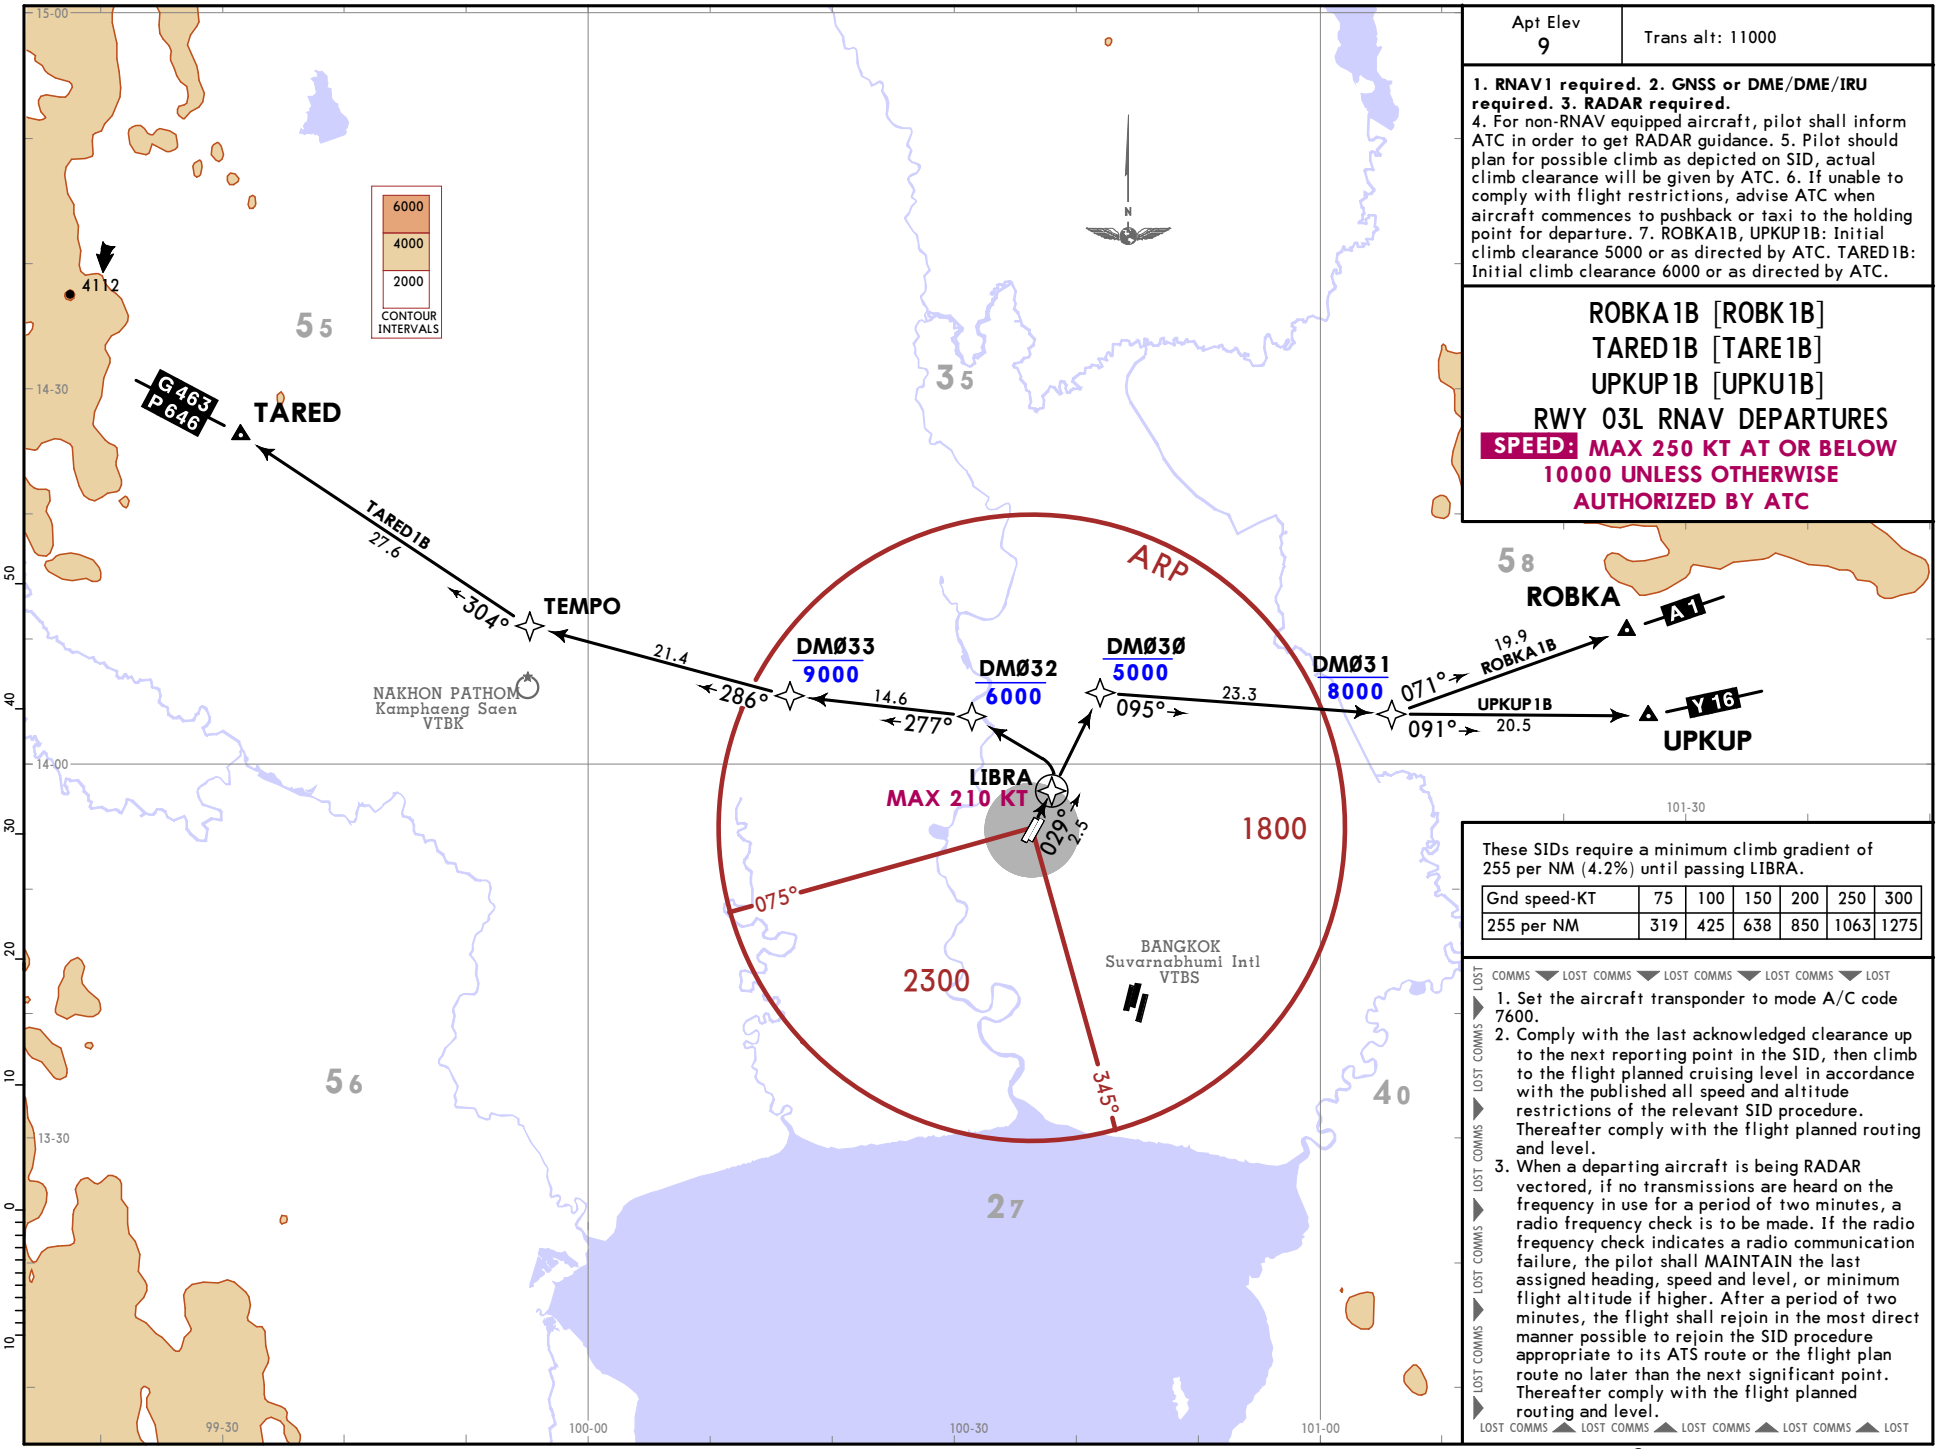

Apt Elev	Trans alt: 11000
9	

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. ROBKA1B, UPKUP1B: Initial climb clearance 5000 or as directed by ATC. TARED1B: Initial climb clearance 6000 or as directed by ATC.

ROBKA1B [ROBK1B]
TARED1B [TARE1B]
UPKUP1B [UPKU1B]
RWY 03L RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

These SIDs require a minimum climb gradient of 255 per NM (4.2%) until passing LIBRA.


Gnd speed-KT	75	100	150	200	250	300
255 per NM	319	425	638	850	1063	1275

LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

LOST COMMS

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

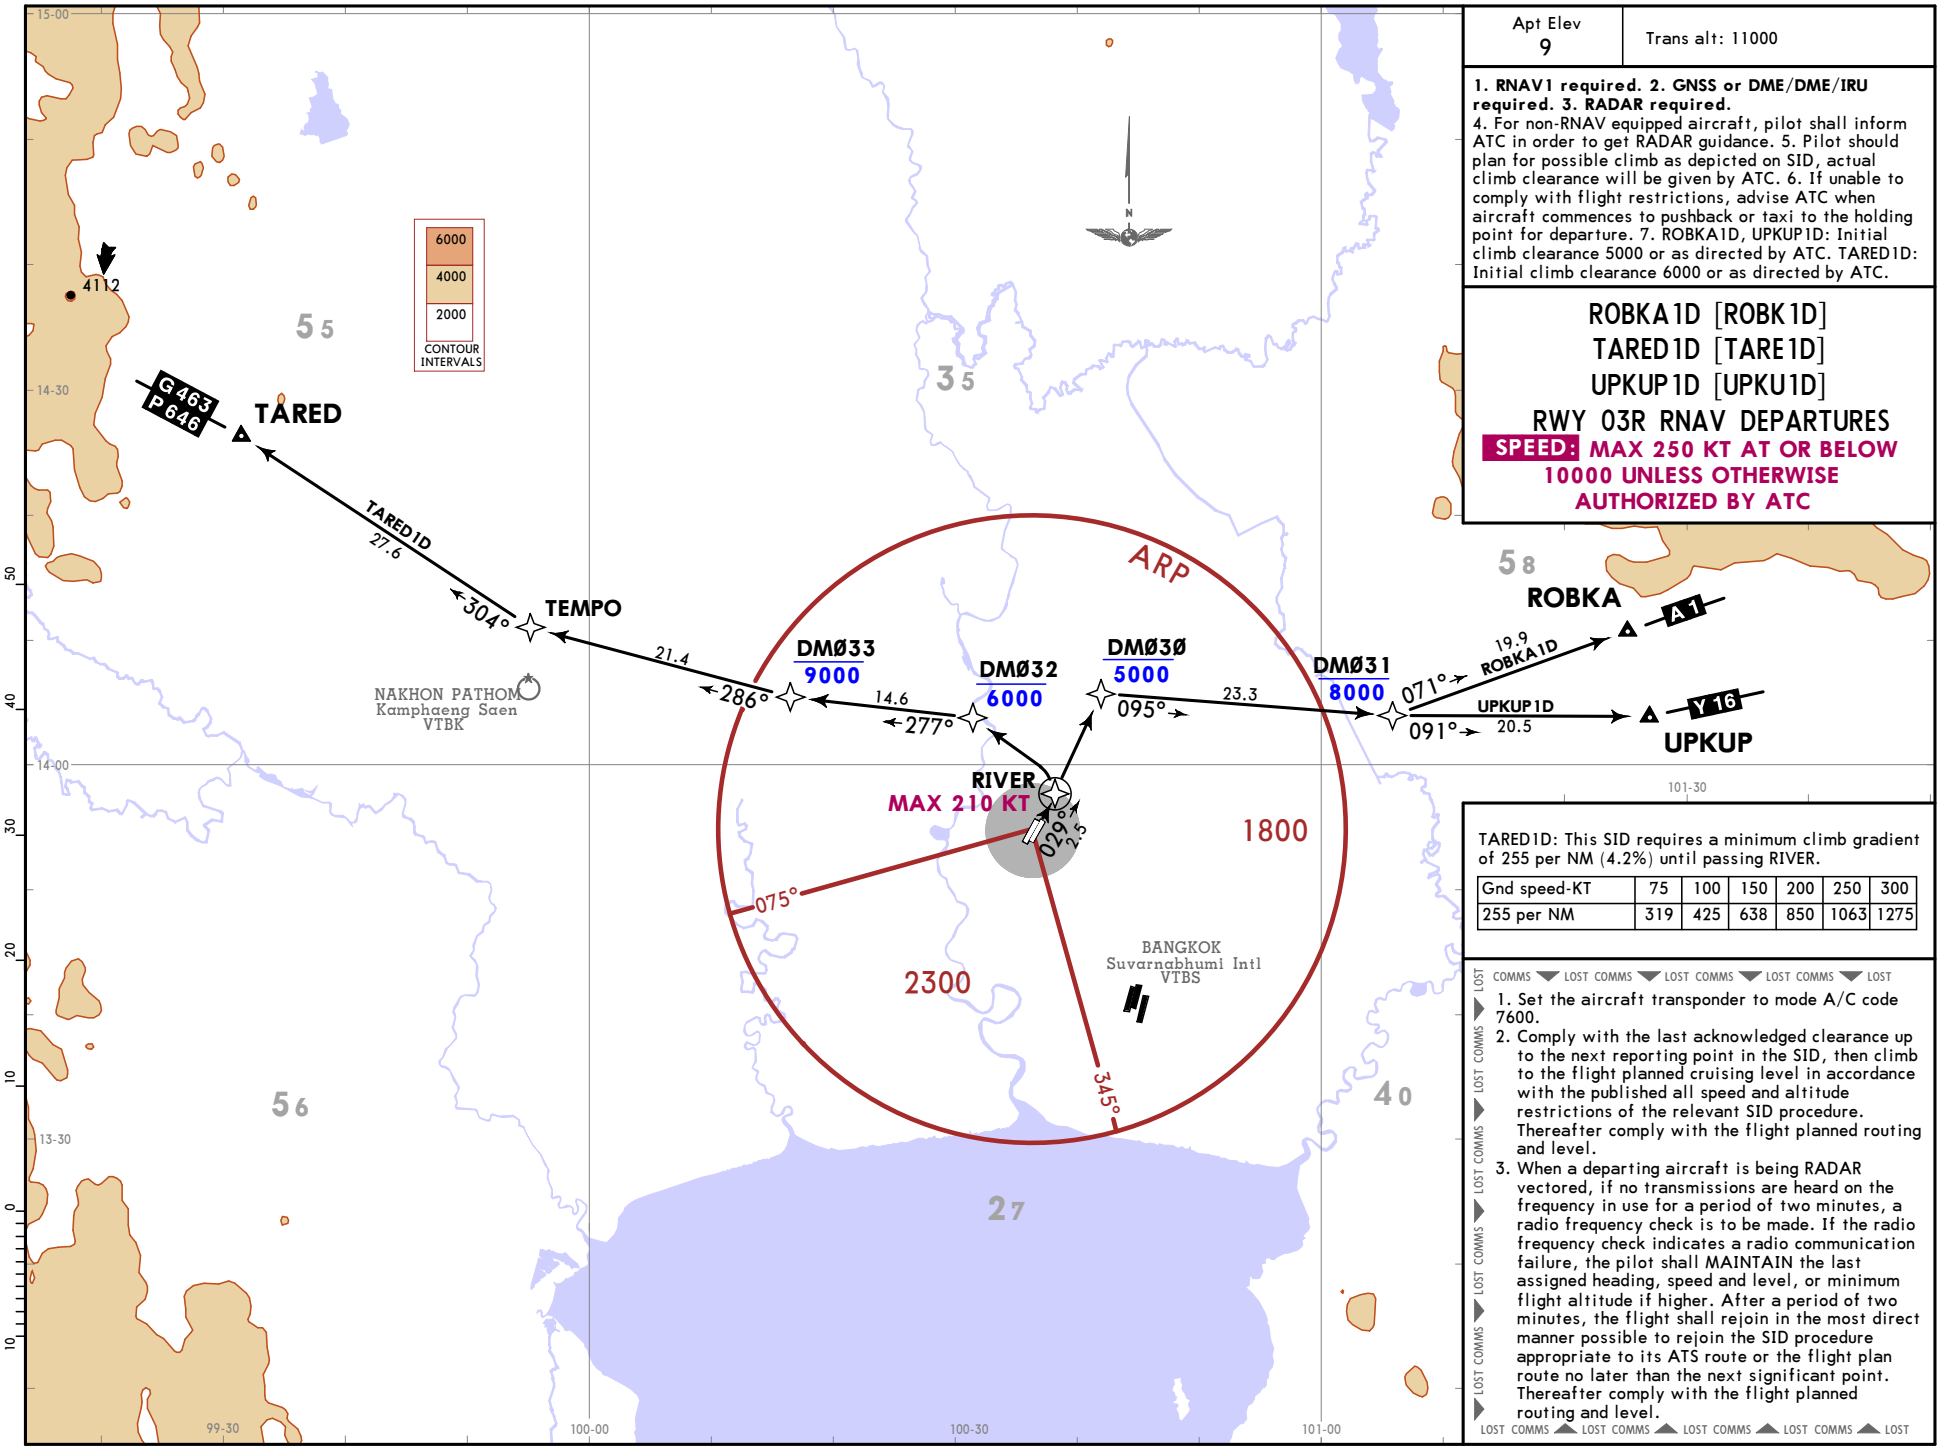

Apt Elev
9

Trans alt: 11000

1. RNAV1 required. 2. GNSS or DME/DME/IRU required. 3. RADAR required.
4. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 5. Pilot should plan for possible climb as depicted on SID, actual climb clearance will be given by ATC. 6. If unable to comply with flight restrictions, advise ATC when aircraft commences to pushback or taxi to the holding point for departure. 7. ROBKA1D, UPKUP1D: Initial climb clearance 5000 or as directed by ATC. TARED1D: Initial climb clearance 6000 or as directed by ATC.

ROBKA1D [ROBK1D]
TARED1D [TARE1D]
UPKUP1D [UPKU1D]
RWY 03R RNAV DEPARTURES

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

TARED1D: This SID requires a minimum climb gradient of 255 per NM (4.2%) until passing RIVER.

Gnd speed-KT	75	100	150	200	250	300
255 per NM	319	425	638	850	1063	1275


LOST COMMS

1. Set the aircraft transponder to mode A/C code 7600.
2. Comply with the last acknowledged clearance up to the next reporting point in the SID, then climb to the flight planned cruising level in accordance with the published all speed and altitude restrictions of the relevant SID procedure. Thereafter comply with the flight planned routing and level.
3. When a departing aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, the pilot shall MAINTAIN the last assigned heading, speed and level, or minimum flight altitude if higher. After a period of two minutes, the flight shall rejoin in the most direct manner possible to rejoin the SID procedure appropriate to its ATS route or the flight plan route no later than the next significant point. Thereafter comply with the flight planned routing and level.

LOST COMMS

CHANGES: Reissue.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

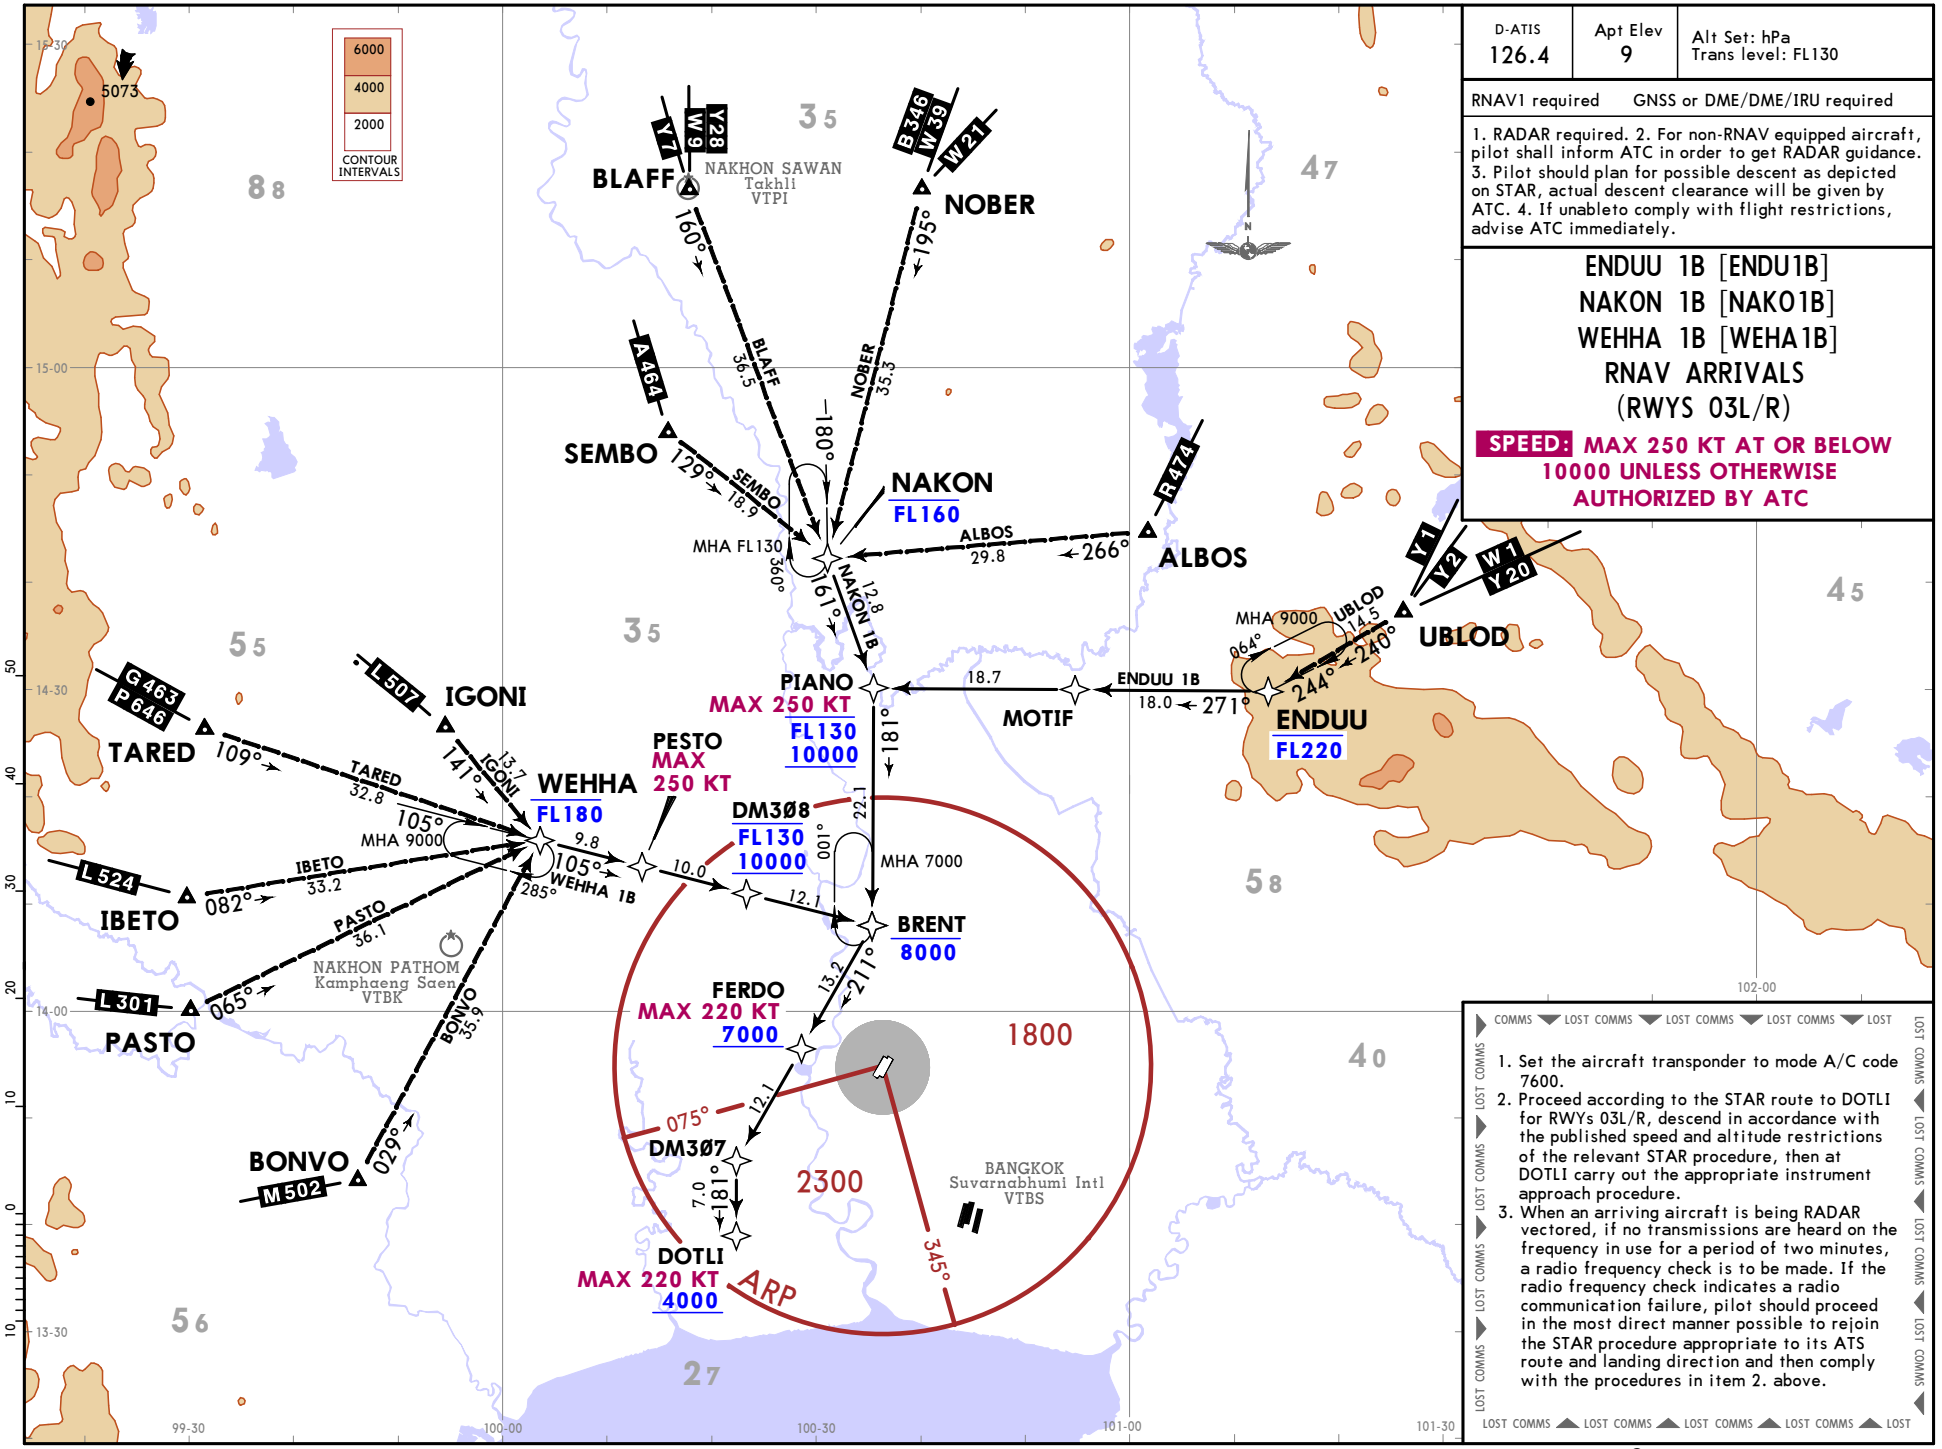

D-ATIS	Apt Elev	Alt Set: hPa Trans level: FL130
126.4	9	

RNAV1 required GNSS or DME/DME/IRU required

1. RADAR required. 2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible descent as depicted on STAR, actual descent clearance will be given by ATC. 4. If unableto comply with flight restrictions, advise ATC immediately.

ENDUU 1B [ENDU1B]
NAKON 1B [NAKO1B]
WEHHA 1B [WEHA1B]
RNAV ARRIVALS
(RWYS 03L/R)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC


COMMS LOST COMMS LOST COMMS LOST COMMS LOST

1. Set the aircraft transponder to mode A/C code 7600.
2. Proceed according to the STAR route to DOTLI for RWYs 03L/R, descend in accordance with the published speed and altitude restrictions of the relevant STAR procedure, then at DOTLI carry out the appropriate instrument approach procedure.
3. When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2. above.

LOST COMMS LOST COMMS LOST COMMS LOST COMMS LOST

CHANGES: Bearing from IBETO to WEHHA.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

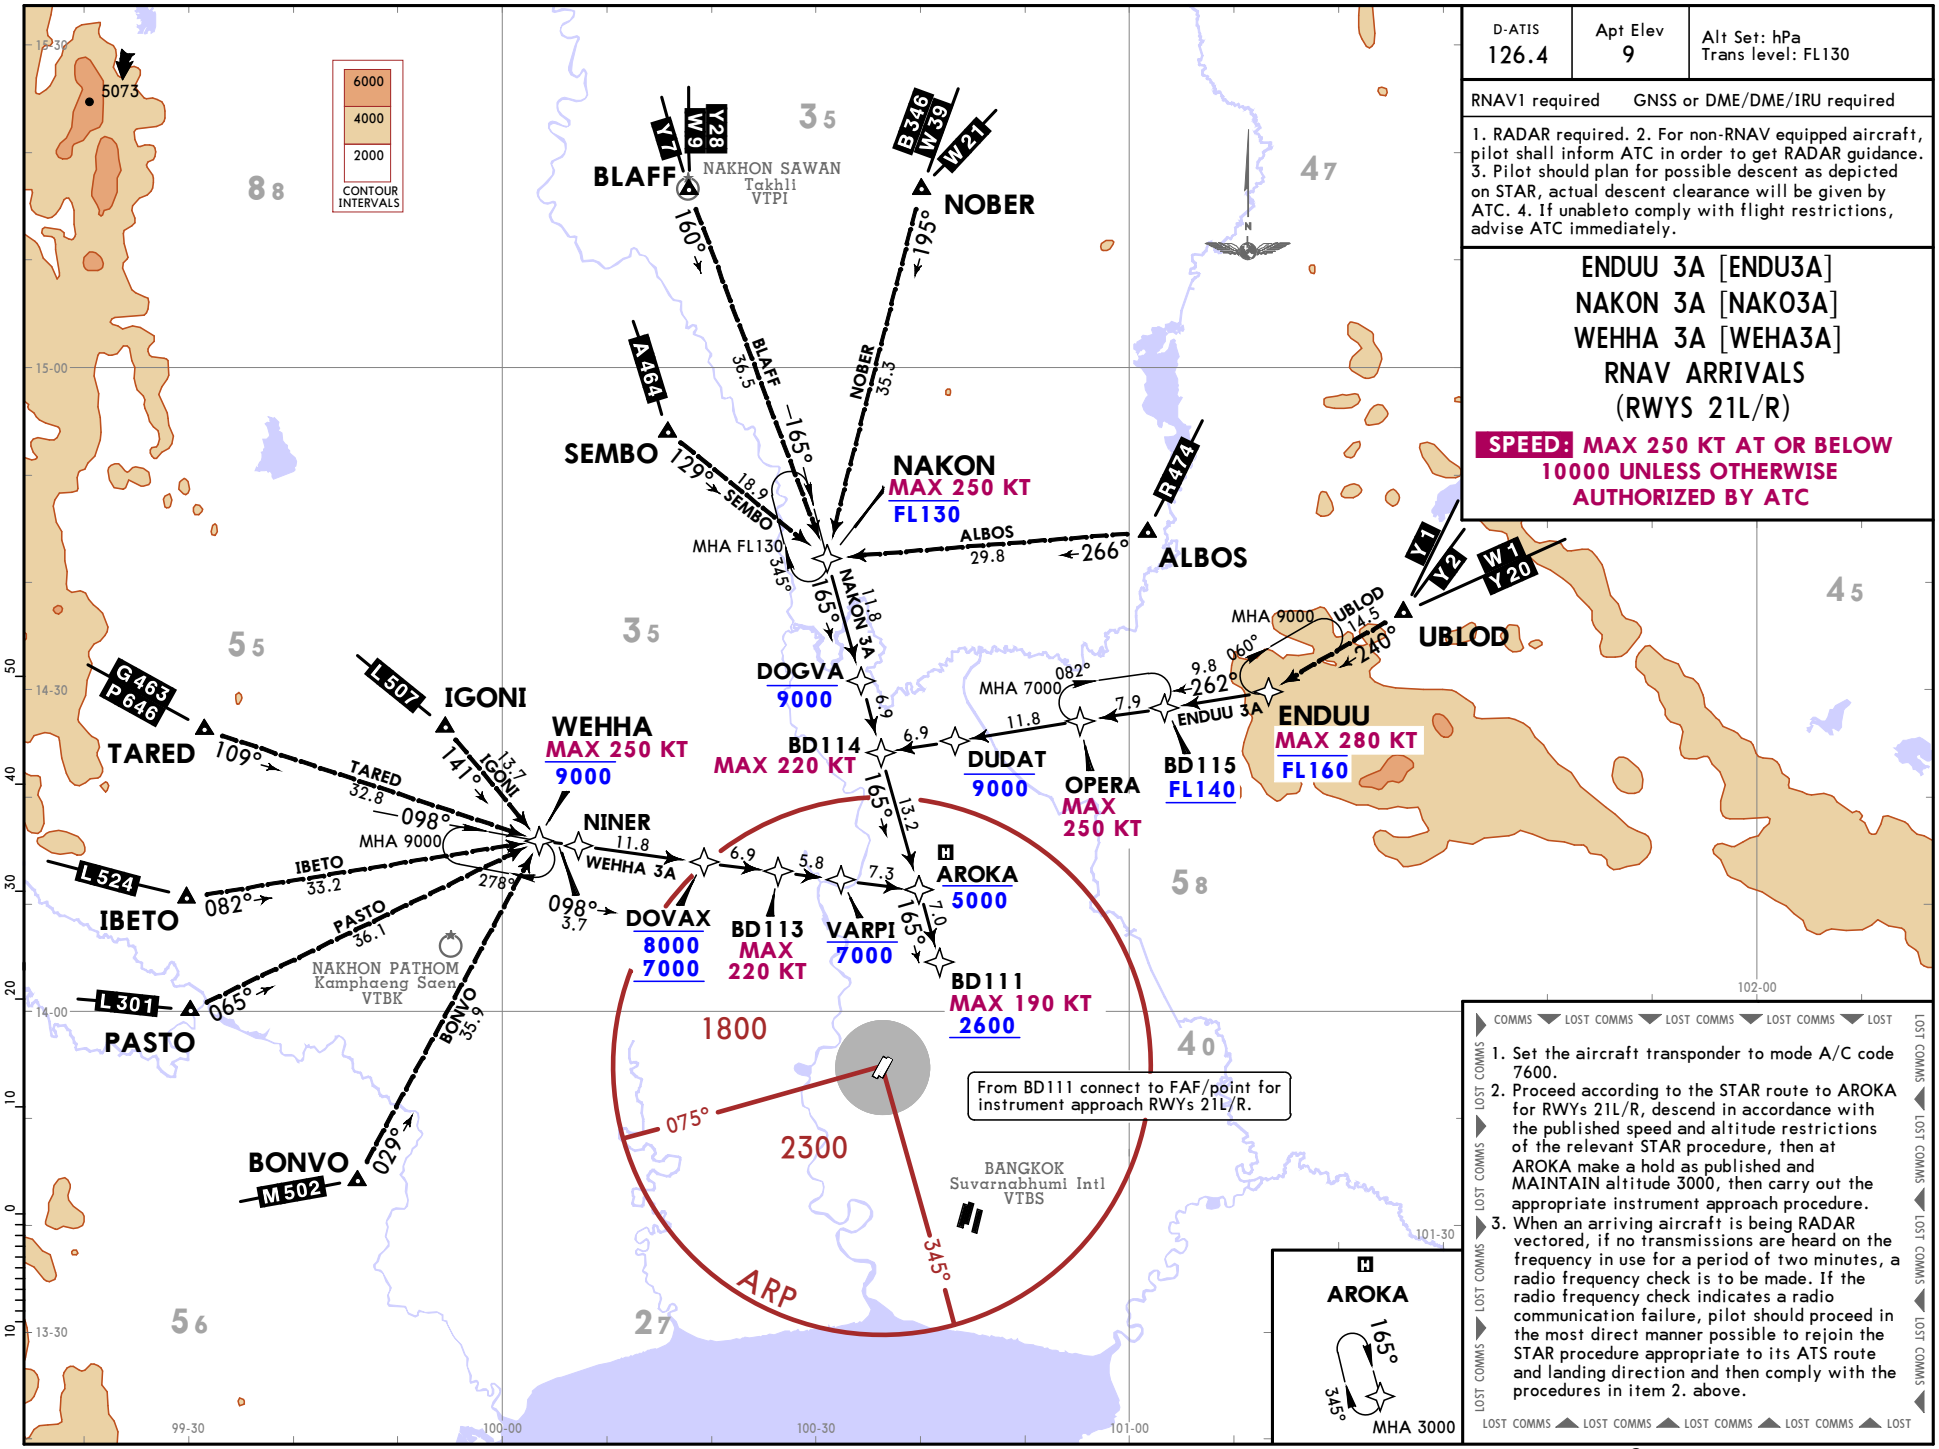

D-ATIS	Apt Elev	Alt Set: hPa
126.4	9	Trans level: FL130

RNAV1 required GNSS or DME/DME/IRU required

1. RADAR required. 2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible descent as depicted on STAR, actual descent clearance will be given by ATC. 4. If unableto comply with flight restrictions, advise ATC immediately.

ENDUU 3A [ENDU3A]
NAKON 3A [NAKO3A]
WEHHA 3A [WEHA3A]
RNAV ARRIVALS
(RWYS 21L/R)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

1. Set the aircraft transponder to mode A/C code 7600.
2. Proceed according to the STAR route to AROKA for RWYs 21L/R, descend in accordance with the published speed and altitude restrictions of the relevant STAR procedure, then at AROKA make a hold as published and MAINTAIN altitude 3000, then carry out the appropriate instrument approach procedure.
3. When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2. above.

LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

CHANGES: Bearing from IBETO to WEHHA.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

D-ATIS	Apt Elev	Alt Set: hPa
126.4	9	Trans level: FL130

RNAV1 required — GNSS or DME/DME/IRU required

1. RADAR required. 2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible descent as depicted on STAR, actual descent clearance will be given by ATC. 4. If unableto comply with flight restrictions, advise ATC immediately.

SABAI 1B [SABA1B]
SEHNA 1B [SEHN1B]
(RWYS 03L/R) RNAV ARRIVALS

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

ARMUS
MHA 9000
ARP
1800
2300
075°
345°
BANGKOK
Suvarnabhumi Intl
VTBS
DOTLI
MAX 220 KT
4000
DM3Ø5
7.0
027°
ARMUS
MAX
220 KT
9.6
360°
316°
7.0
DM3Ø6
15.8
SEHNA 1B
29.4
271°
BAMBU
MAX 250 KT
FL150
SABAI
MAX
250 KT
FL130
10000
SABAI 1B
15.6
360°
HOTEL
7.2
360°
HOTEL
W31
G458
Y99
SURMA
76.0
GUTSO
24.1
323°
BUT
47.9
305°
GUTSO
W19
M751
A464
M769
Y98
W42
Y5
SURMA
356°
NOT TO SCALE
M904
R201
Y11
RAYONG
U-Tapao Rayong
Pattaya Intl
VTBU
U-TAPAO
110.8 BUT
M904
Y11
SEHNA
FL220
ANREN
L880
G474
243°
248°
DULEM
M633
74.5
ANREN
DULEM
67.1
GOMES
24.6
256°
GOMES
R468
N506
NUGPA
41.1
292°
NUGPA
P629
RYN
42.5
317°
RAYONG
112.5 RYN
N891
ALEMI
43.7
341°
ALEMI
Y12
THAILAND
CAMBODIA
CAMBODIA
THAILAND
6000
4000
2000
CONTOUR INTERVALS
5155
35
58
40
27
75
24
47
79


COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

1. Set the aircraft transponder to mode A/C code 7600.
2. Proceed according to the STAR route to DOTLI for RWYs 03L/R, descend in accordance with the published all speed and altitude restrictions of the relevant STAR procedure, then at DOTLI carry out the appropriate instrumentapproach procedure.
3. When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2. above.

LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

CHANGES: Bearings from HOTEL to SABAI, from SABAI to ARMUS, from ARMUS to DM3Ø5, holding over ARMUS.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

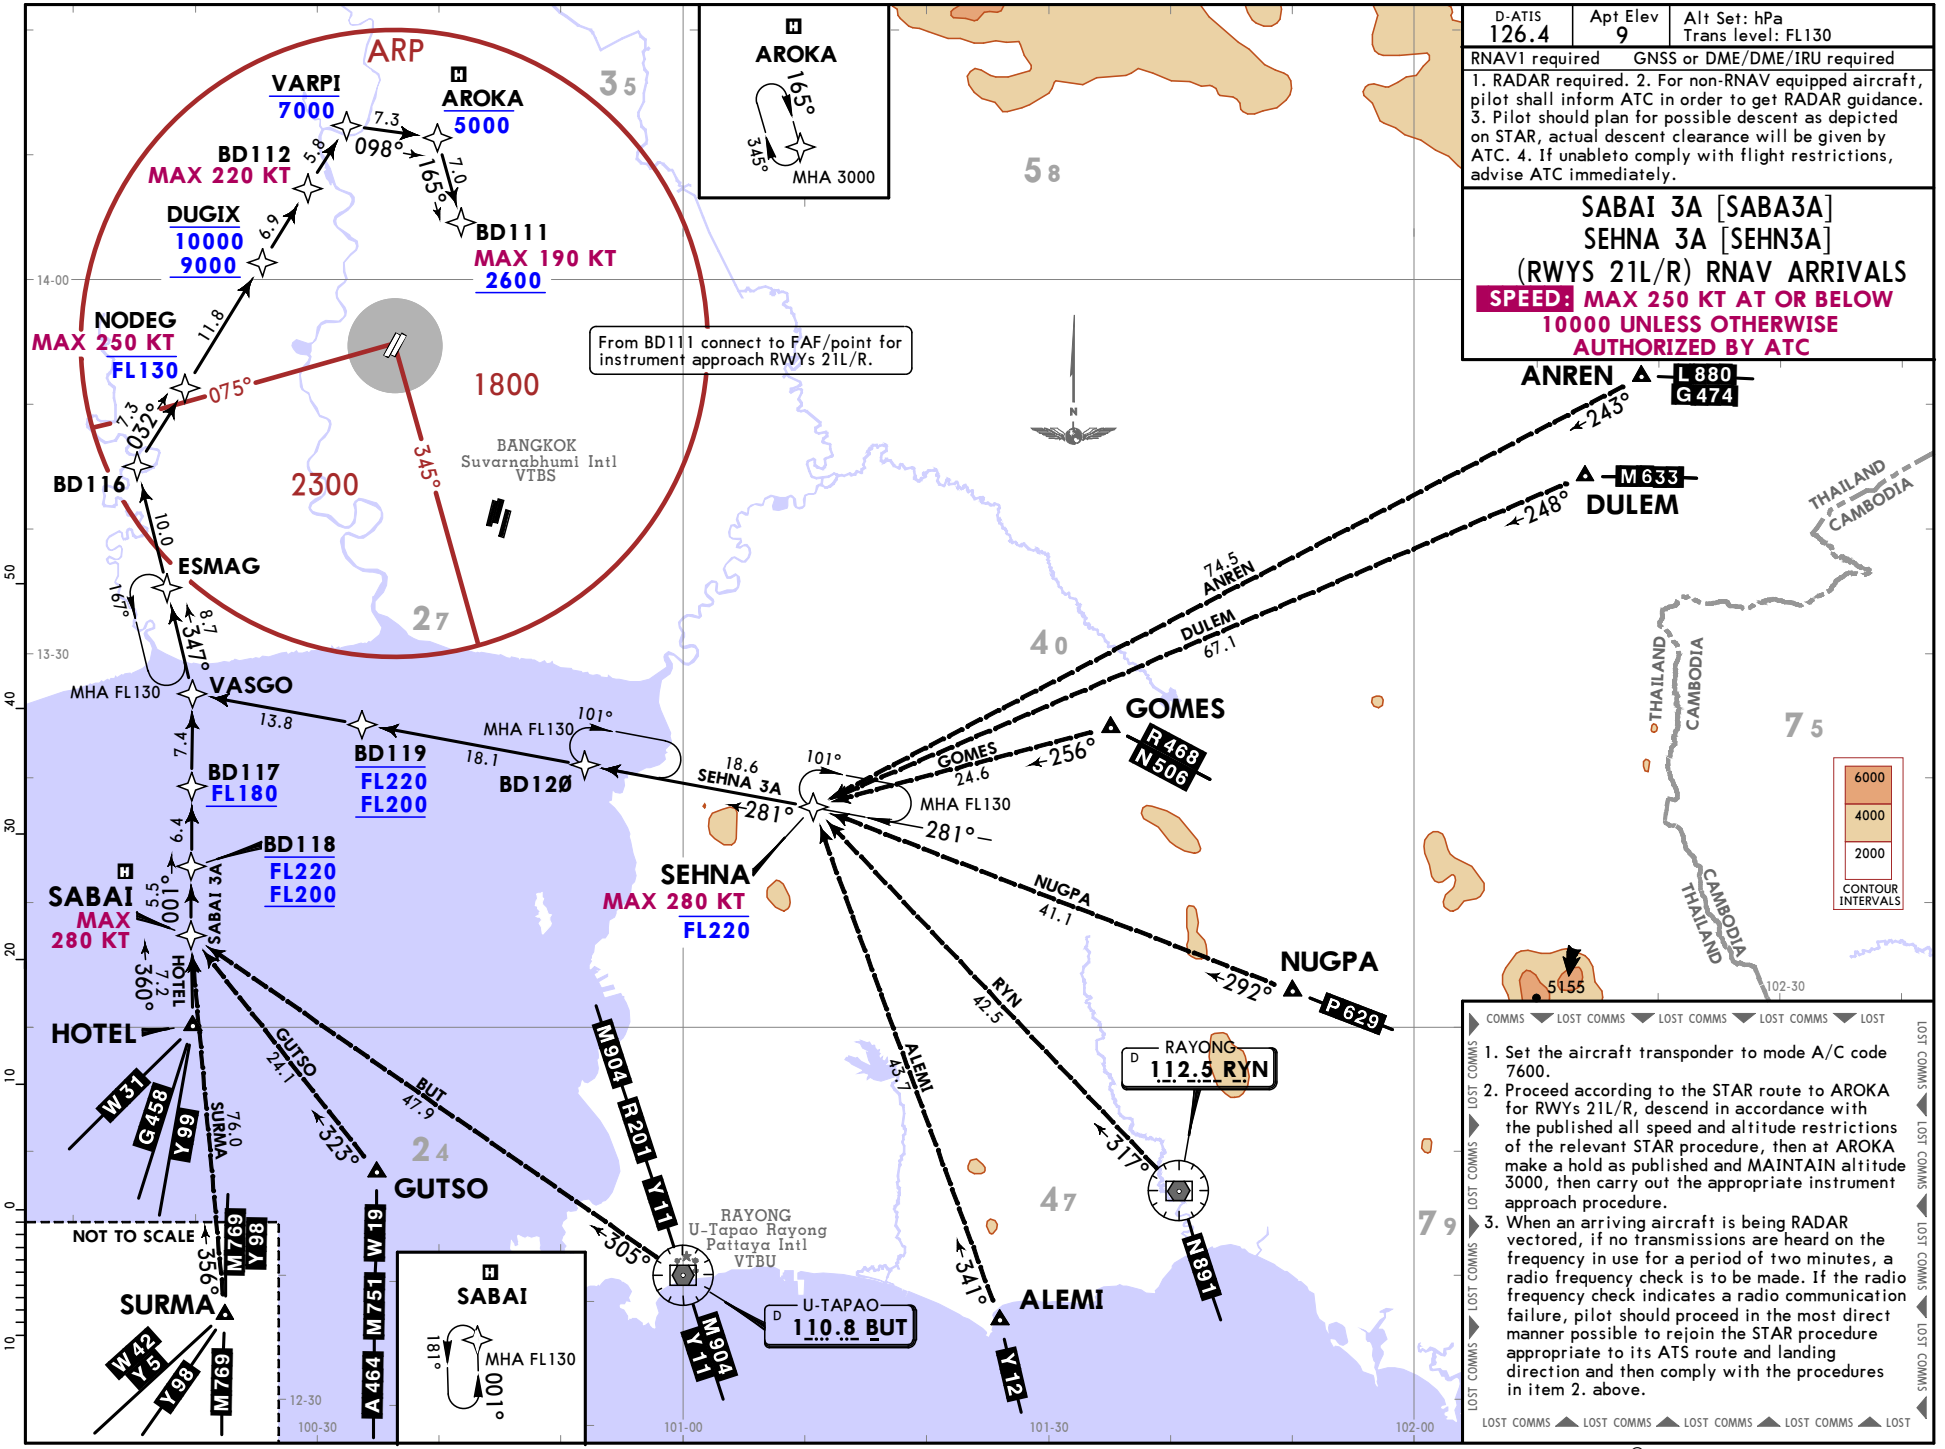

D-ATIS	Apt Elev	Alt Set: hPa
126.4	9	Trans level: FL130

RNAV1 required GNSS or DME/DME/IRU required

1. RADAR required. 2. For non-RNAV equipped aircraft, pilot shall inform ATC in order to get RADAR guidance. 3. Pilot should plan for possible descent as depicted on STAR, actual descent clearance will be given by ATC. 4. If unableto comply with flight restrictions, advise ATC immediately.

SABAI 3A [SABA3A]
SEHNA 3A [SEHN3A]
(RWYS 21L/R) RNAV ARRIVALS

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC

1. Set the aircraft transponder to mode A/C code 7600.
2. Proceed according to the STAR route to AROKA for RWYs 21L/R, descend in accordance with the published all speed and altitude restrictions of the relevant STAR procedure, then at AROKA make a hold as published and MAINTAIN altitude 3000, then carry out the appropriate instrument approach procedure.
3. When an arriving aircraft is being RADAR vectored, if no transmissions are heard on the frequency in use for a period of two minutes, a radio frequency check is to be made. If the radio frequency check indicates a radio communication failure, pilot should proceed in the most direct manner possible to rejoin the STAR procedure appropriate to its ATS route and landing direction and then comply with the procedures in item 2. above.

LOST COMMS ◀ LOST COMMS ◀ LOST COMMS ◀ LOST COMMS ◀ LOST

CHANGES: Bearing from HOTEL to SABAI.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (11-4)

BANGKOK, THAILAND
ILS or LOC Y Rwy 21L

D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8


BRIEFING STRIP™

LOC IDMG	Final Apch Crs	LUGSO	ILS DA(H)	Apt Elev 9′
110.3	209°	1600′ (1593′)	220′ (213′)	Rwy 7′


MISSED APCH: Climb runway heading until D2.0 BKK VOR, then turn RIGHT to intercept outbound BKK VOR R-250, then proceed to HOLYA at 3000′ and hold or as directed by ATC. No turn before MAP (LOC only).

Alt Set: hPa | Rwy Elev: 0 hPa | Trans level: FL130 | Trans alt: 11000′


VOR, DME required.



MSA BKK VOR

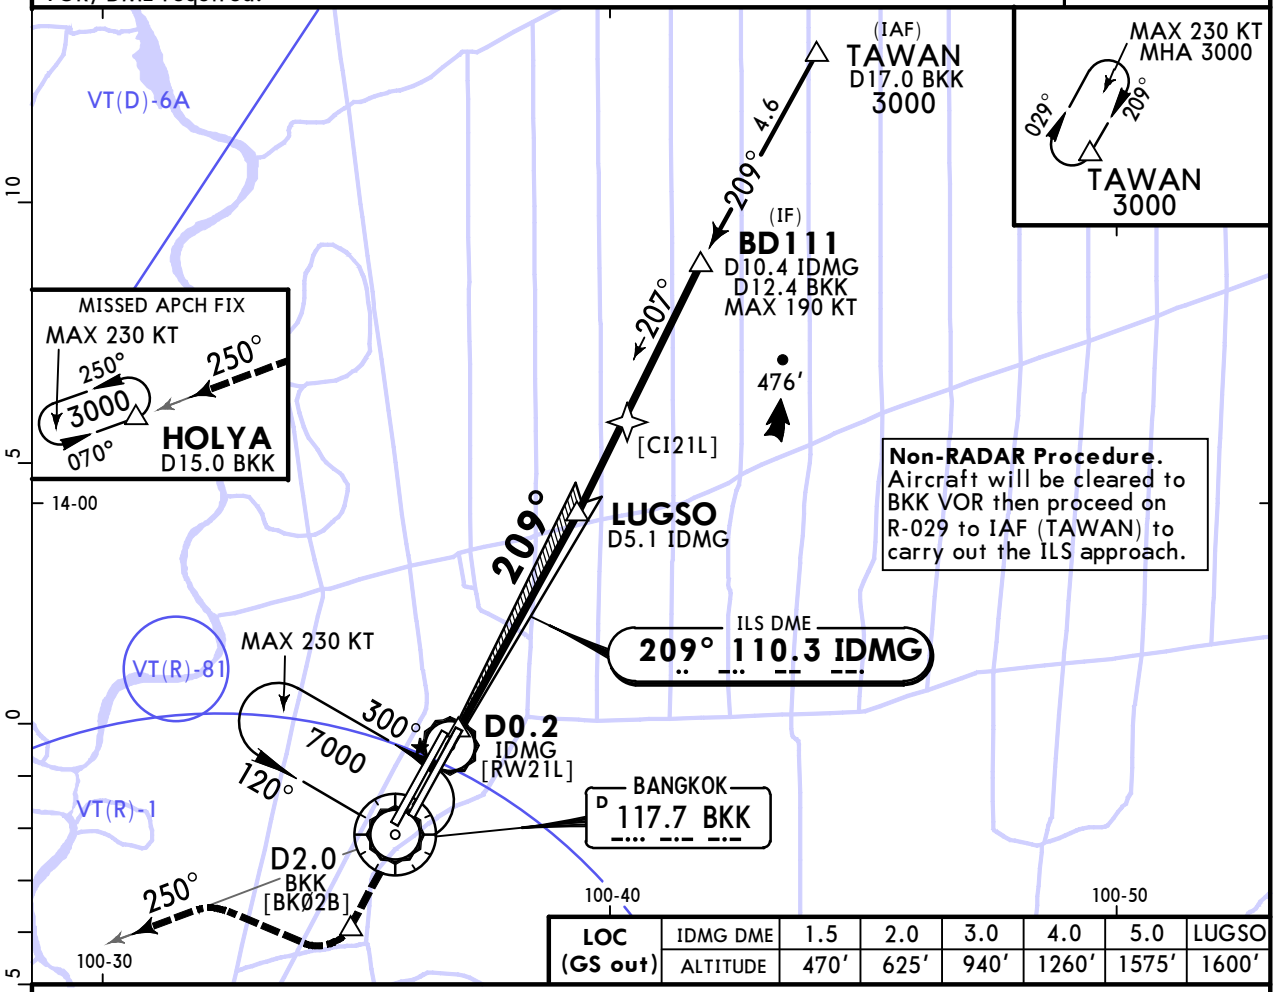

LOC (GS out)	IDMG DME	1.5	2.0	3.0	4.0	5.0	LUGSO
	ALTITUDE	470′	625′	940′	1260′	1575′	1600′

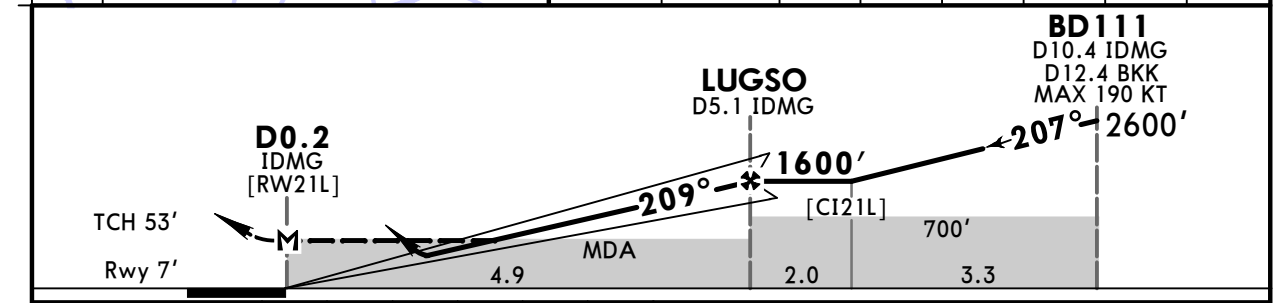

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at D0.2 IDMG							

PALS CAT I
PAPI PAPI

3000′ on Rwy hdg | D2.0 BKK

PANS OPS

Std STRAIGHT-IN LANDING

	ILS DA(H) 220′ (213′) ALS out	LOC (GS out) CDFA 2 DA/MDA(H) 470′ (463′) ALS out
A	1 R550m	R1500m
B		
C	R1200m	R2200m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	800′ (791′)	V1500m
135	800′ (791′)	V1600m
180	800′ (791′)	V2400m
205	1100′ (1091′)	V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspace.

© JEPPESEN, 1999, 2026. ALL RIGHTS RESERVED.

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (11-3)

BANGKOK, THAILAND
ILS or LOC Z Rwy 21L

D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8


BRIEFING STRIP™


LOC IDMG	Final Apch Crs	LUGSO MANDATORY	ILS DA(H)	Apt Elev 9′
110.3	**209°**	**1600′** (1593′)	**220′** (213′)	Rwy 7′

MISSED APCH: Climb on track 209° to BD199, then turn RIGHT to BD177, then proceed to HOLYA at 3000′ and hold or as directed by ATC. No turn before MAP (LOC only).


RNAV1 required | Alt Set: hPa | Rwy Elev: 0 hPa | Trans level: FL130 | Trans alt: 11000′

1. GNSS or DME/DME/IRU required. 2. RADAR required. 3. DME required.



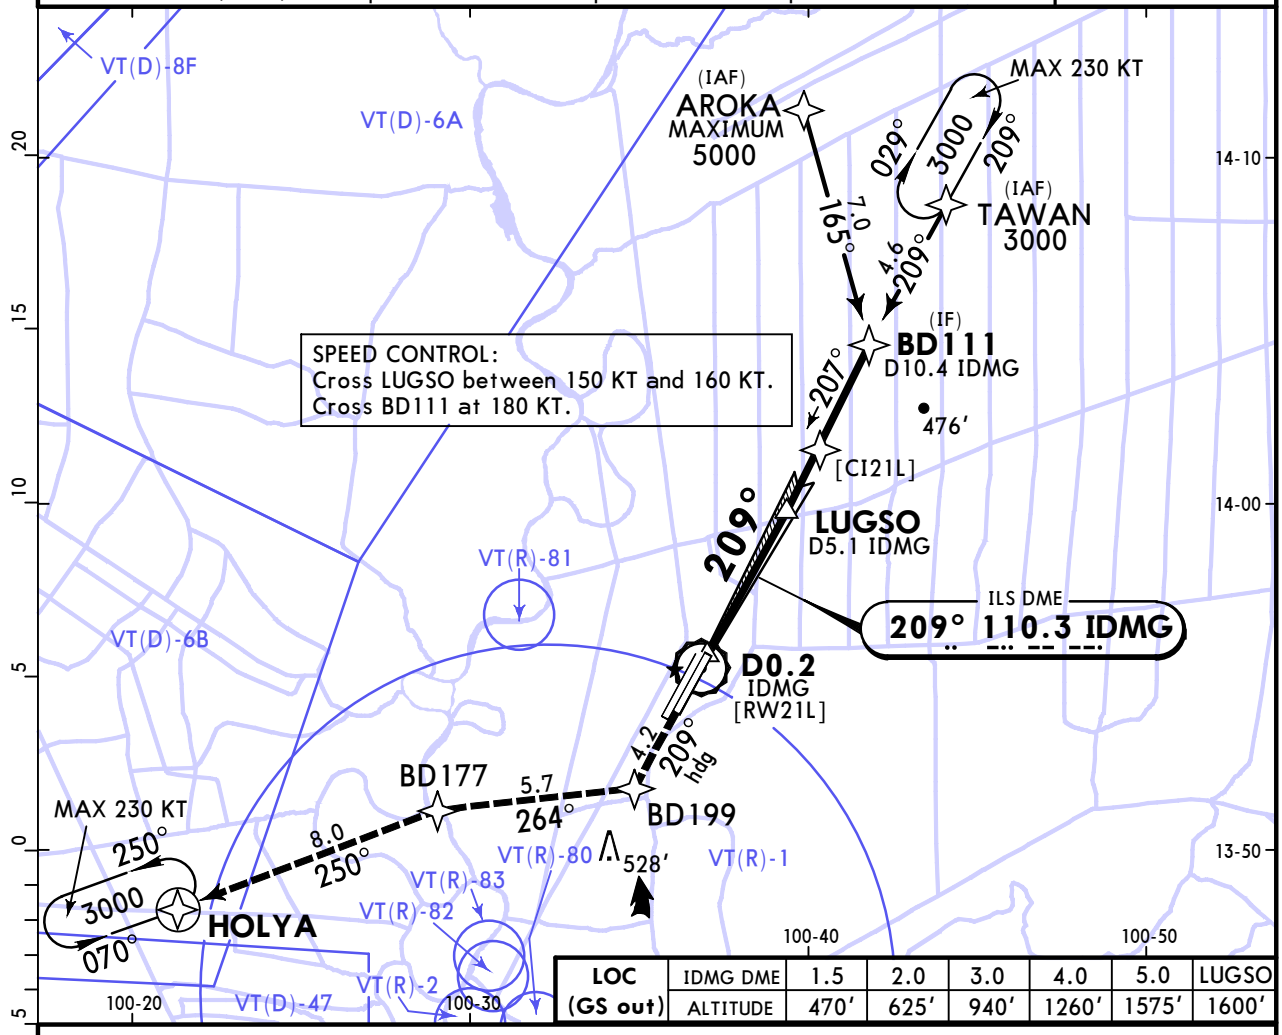

LOC (GS out)	IDMG DME	1.5	2.0	3.0	4.0	5.0	LUGSO
	ALTITUDE	470′	625′	940′	1260′	1575′	1600′

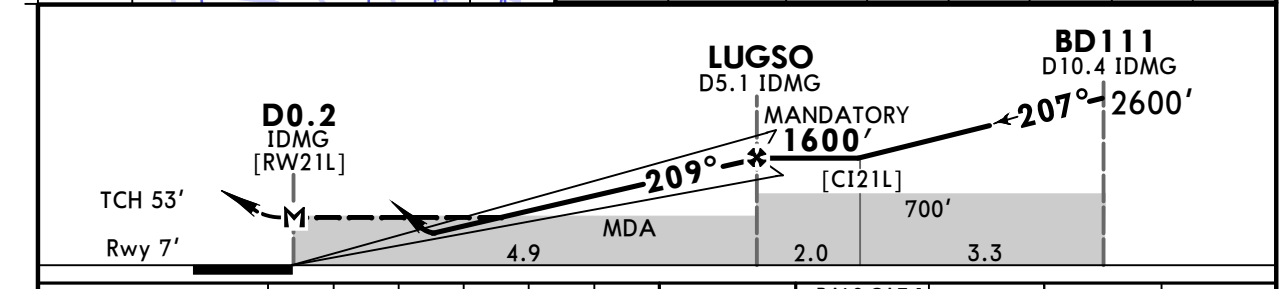

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at D0.2 IDMG							

PALS CAT I — PAPI PAPI

3000′ on 209° hdg — BD199

Std

	STRAIGHT-IN LANDING ILS DA(H) 220′ (213′)		LOC (GS out) CDFA 2 DA/MDA(H) 470′ (463′)		CIRCLE-TO-LAND		
		ALS out		ALS out	Max Kts	MDA(H)	
A	1 R550m	R1200m	R1500m	R1500m	100	800′ (791′)	V1500m
B					135	800′ (791′)	V1600m
C				R2200m	180	800′ (791′)	V2400m
D					205	1100′ (1091′)	V3600m

PANS OPS

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2018, 2026. ALL RIGHTS RESERVED.

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (12-2)

BANGKOK, THAILAND
RNP Rwy 03R


D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8

BRIEFING STRIP ™


RNAV	Final Apch Crs	BD32Ø MANDATORY	LNAV/VNAV DA(H)	Apt Elev 9′
	029°	1100′(1095′)	490′(485′)	Rwy 5′

MISSED APCH: Climb and maintain 3000′. Track 029° to BD321, then to BD322, then to BD323, then to BD324. At BD324 proceed to BD325 climbing up to 4000′, then to GOLIV and hold or as directed by ATC. No turn before MAP.


Alt Set: hPa	Rwy Elev: 0 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 15°C.		



MSA ARP

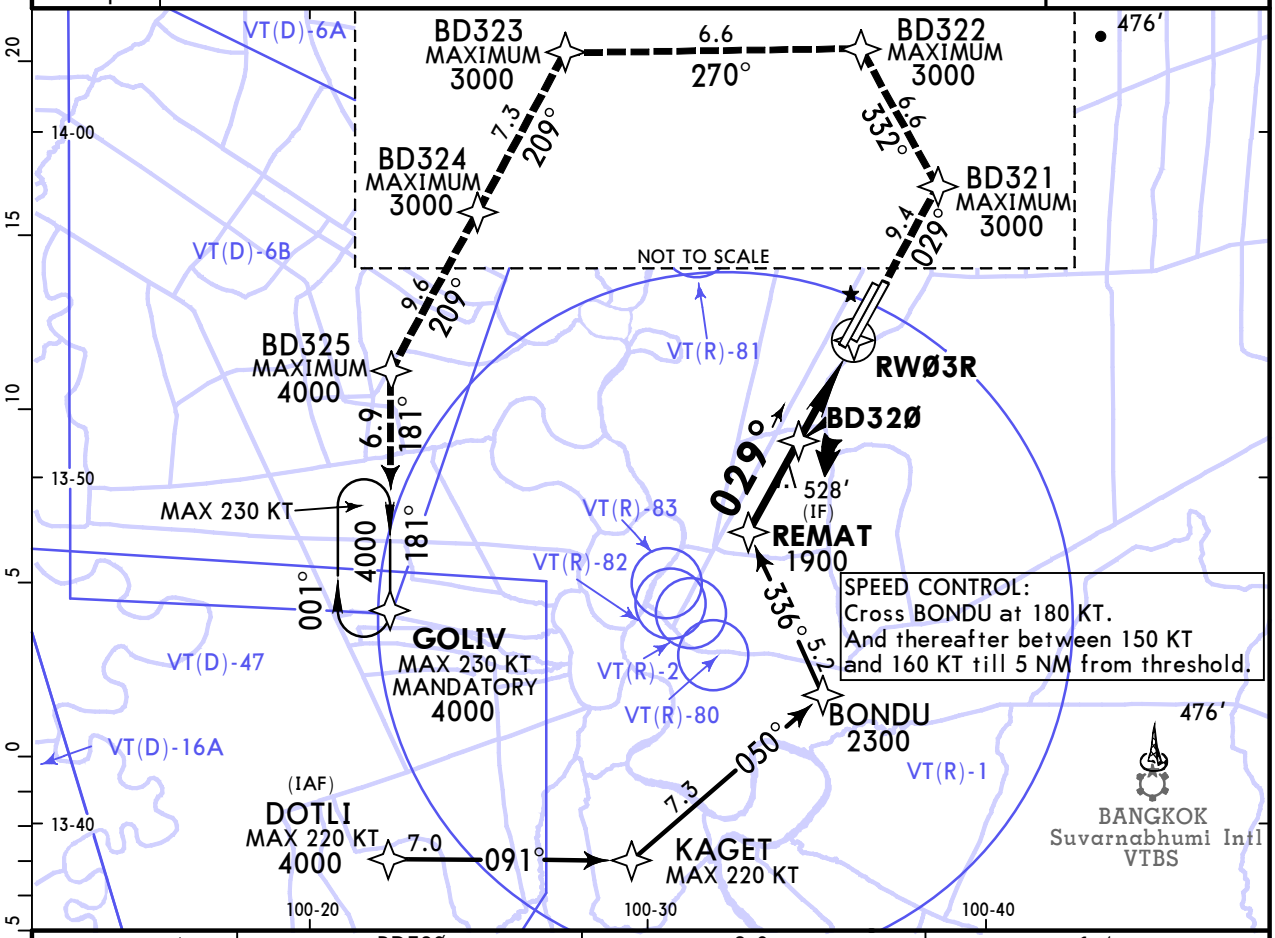

DIST to RWØ3R	BD32Ø	2.0	1.4
ALTITUDE	1100′	685′	500′

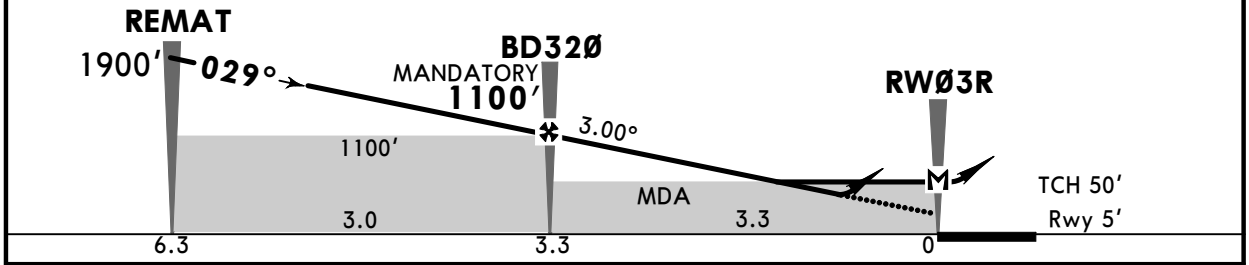

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at RWØ3R							

SALS
PAPI PAPI

3000′ on 029° BD321

PANS OPS

Std

STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
LNAV/VNAV		LNAV CDFA		Max Kts	MDA(H)	
DA(H) 490′(485′)		1 DA/MDA(H) 500′(495′)				
ALS out		ALS out				
A	R1500m		R1500m			
B				100	800′(791′)	V1500m
C	R2100m	R2300m	R2100m	135	800′(791′)	V1600m
D				180	800′(791′)	V2400m
				205	1100′(1091′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 2021, 2026. ALL RIGHTS RESERVED.

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (12-3)


BANGKOK, THAILAND
RNP Rwy 21L


D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8

RNAV	Final Apch Crs	LUGSO MANDATORY	LNAV/VNAV DA(H)	Apt Elev 9' Rwy 7'
	209°	1600′ (1593′)	350′ (343′)	


MISSED APCH: Climb on track 209° to BD199, then turn RIGHT to BD177, then proceed to HOLYA at 3000′, and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa	Rwy Elev: 0 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 15°C.		



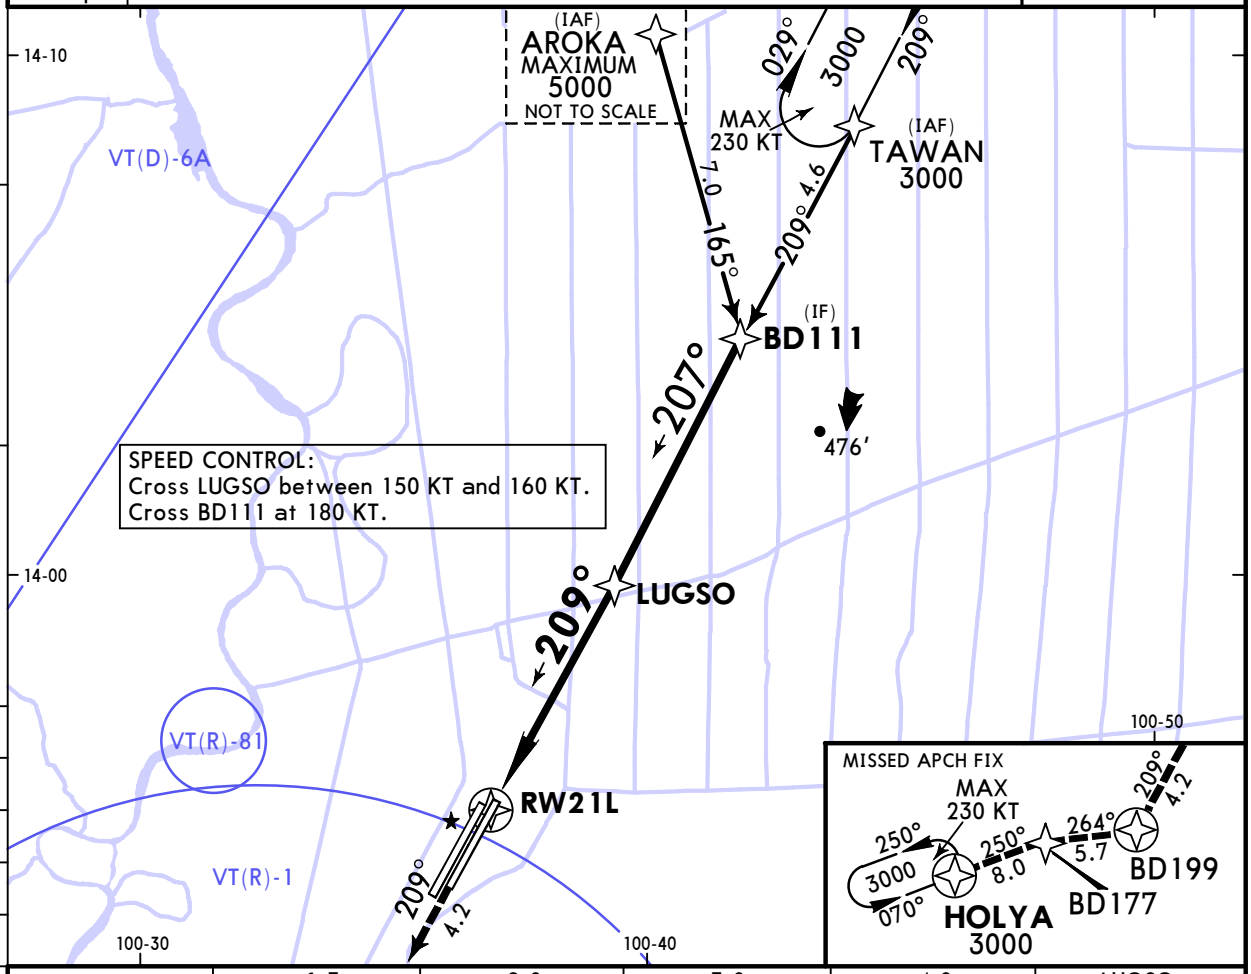

DIST to THR	1.3	2.0	3.0	4.0	LUGSO
ALTITUDE	470′	690′	1005′	1320′	1600′

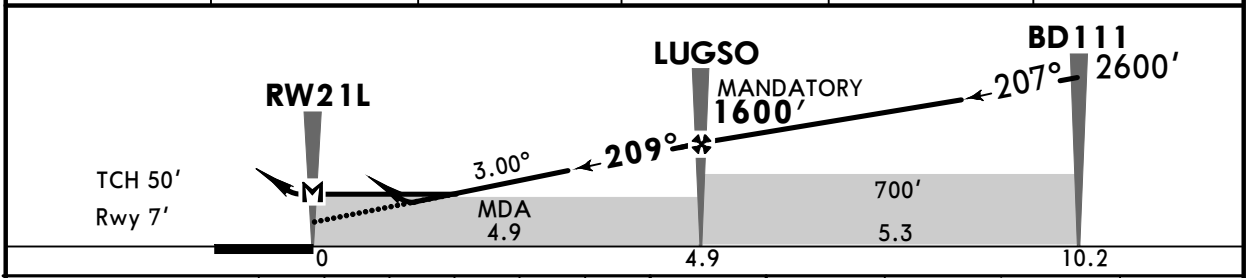

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at RW21L							

PALS CAT I
PAPI PAPI
3000′ on 209° BD199

Std STRAIGHT-IN LANDING

	LNAV/VNAV DA(H) 350′ (343′) ALS out	LNAV CDFA 1 DA/MDA(H) 470′ (463′) ALS out
A	R900m	R1500m
B		
C		R1600m
D		R2200m

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	800′ (791′)	V1500m
135	800′ (791′)	V1600m
180	800′ (791′)	V2400m
205	1100′ (1091′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspace.

© JEPPESEN, 2016, 2026. ALL RIGHTS RESERVED.

BRIEFING STRIP ™
PANS OPS

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (13-1)

BANGKOK, THAILAND
VOR Rwy 03R


D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8

VOR BKK	Final Apch Crs	D5.0	DA/MDA(H)	Apt Elev 9′
117.7	023°	1900′(1891′)	790′(781′)	


MISSED APCH: At VOR, climb outbound on R-023 BKK VOR until 1500′, then turn RIGHT to BKK VOR and continue climb on R-241 BKK VOR to D15.0 BKK VOR at 3000′ and hold or as directed by ATC. No turn before MAP.

Alt Set: hPa | Rwy Elev: 0 hPa | Trans level: FL130 | Trans alt: 11000′


1. DME required. 2. No intermediate segment.



MSA BKK VOR

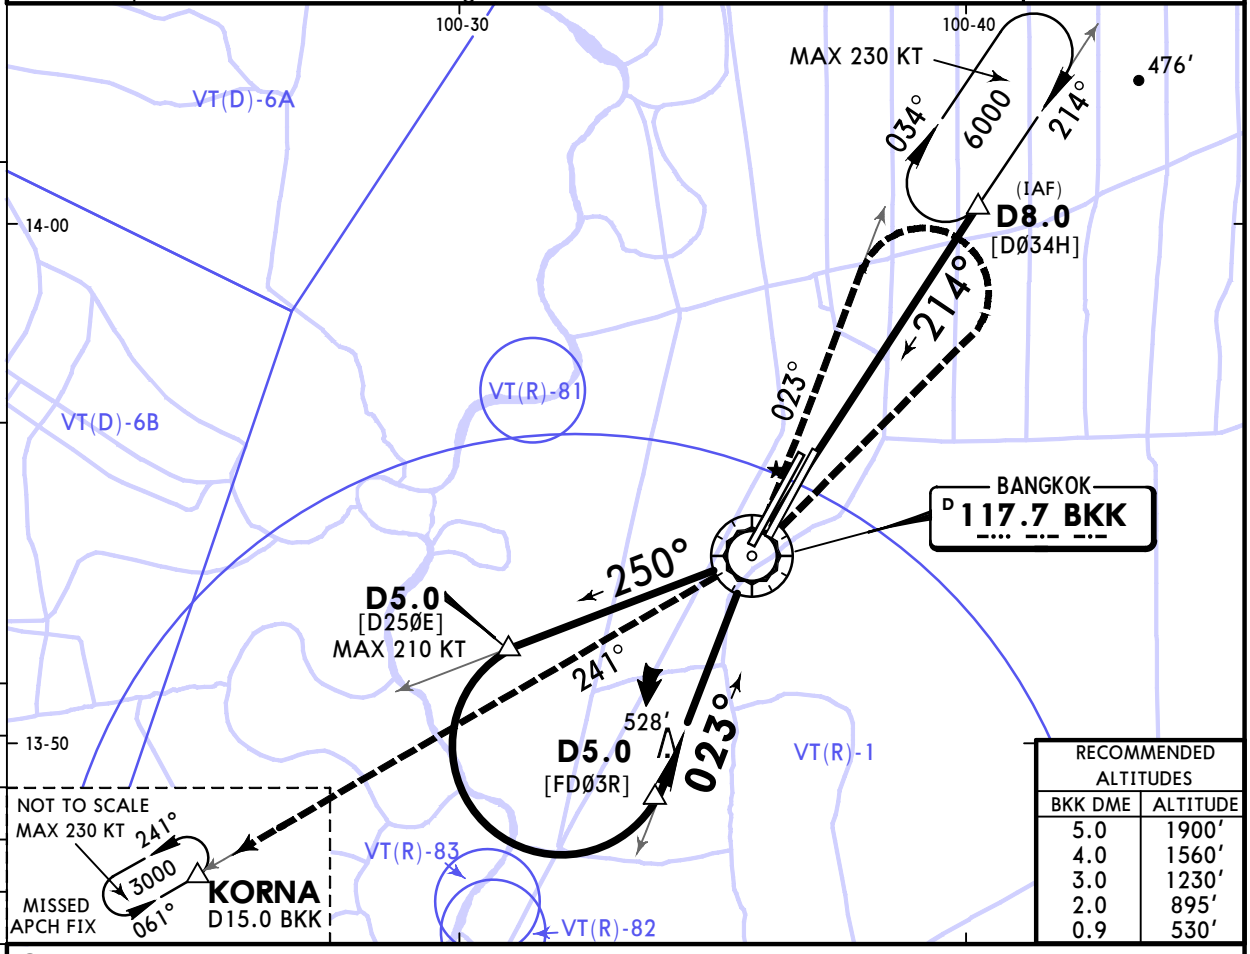

RECOMMENDED ALTITUDES	
BKK DME	ALTITUDE
5.0	1900′
4.0	1560′
3.0	1230′
2.0	895′
0.9	530′

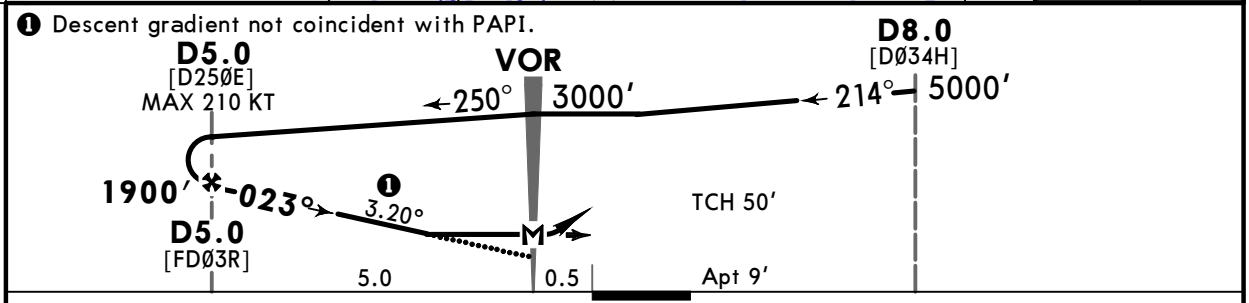

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.20°	396	510	566	679	793	906
MAP at VOR							
FAF to MAP	5.0	4:17	3:20	3:00	2:30	2:09	1:53

SALS
PAPI PAPI

1500′ on BKK 117.7 R-023

Std STRAIGHT-IN LANDING

CDFA

1 DA/MDA(H) 790′(781′)

ALS out

A	R1500m	
B		
C	R3400m	R3600m
D		

CIRCLE-TO-LAND

Max Kts.	MDA(H)	
100	800′(791′)	V1500m
135	800′(791′)	V1600m
180	800′(791′)	V2400m
205	1100′(1091′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

BRIEFING STRIP™ | PANS OPS

CHANGES: Airspaces.

© JEPPESEN, 2015, 2026. ALL RIGHTS RESERVED.

VTBD/DMK
DON MUEANG INTL

JEPPESEN
22 MAY 26 (13-2)

BANGKOK, THAILAND
VOR Rwy 21L


D-ATIS	DON MUEANG Arrival (R)	DON MUEANG Approach (R)	DON MUEANG Tower	Ground
126.4 344.6	133.0 274.5	119.1 119.4 120.3 133.4 122.35 124.35 125.2 274.5	118.1 236.6	121.9 122.5 257.8

BRIEFING STRIP™


VOR BKK 117.7	Final Apch Crs 211°	D6.8 1600′(1591′)	DA/MDA(H) 520′(511′)	Apt Elev 9′

MISSED APCH: Climb straight ahead to BKK VOR until D2.0 BKK VOR outbound, then turn RIGHT continue climb outbound on R-250 BKK VOR to 3000′ and hold at D15.0 BKK VOR or as directed by ATC.
No turn before MAP.


Alt Set: hPa | Rwy Elev: 0 hPa | Trans level: FL130 | Trans alt: 11000′
DME required.



MSA BKK VOR

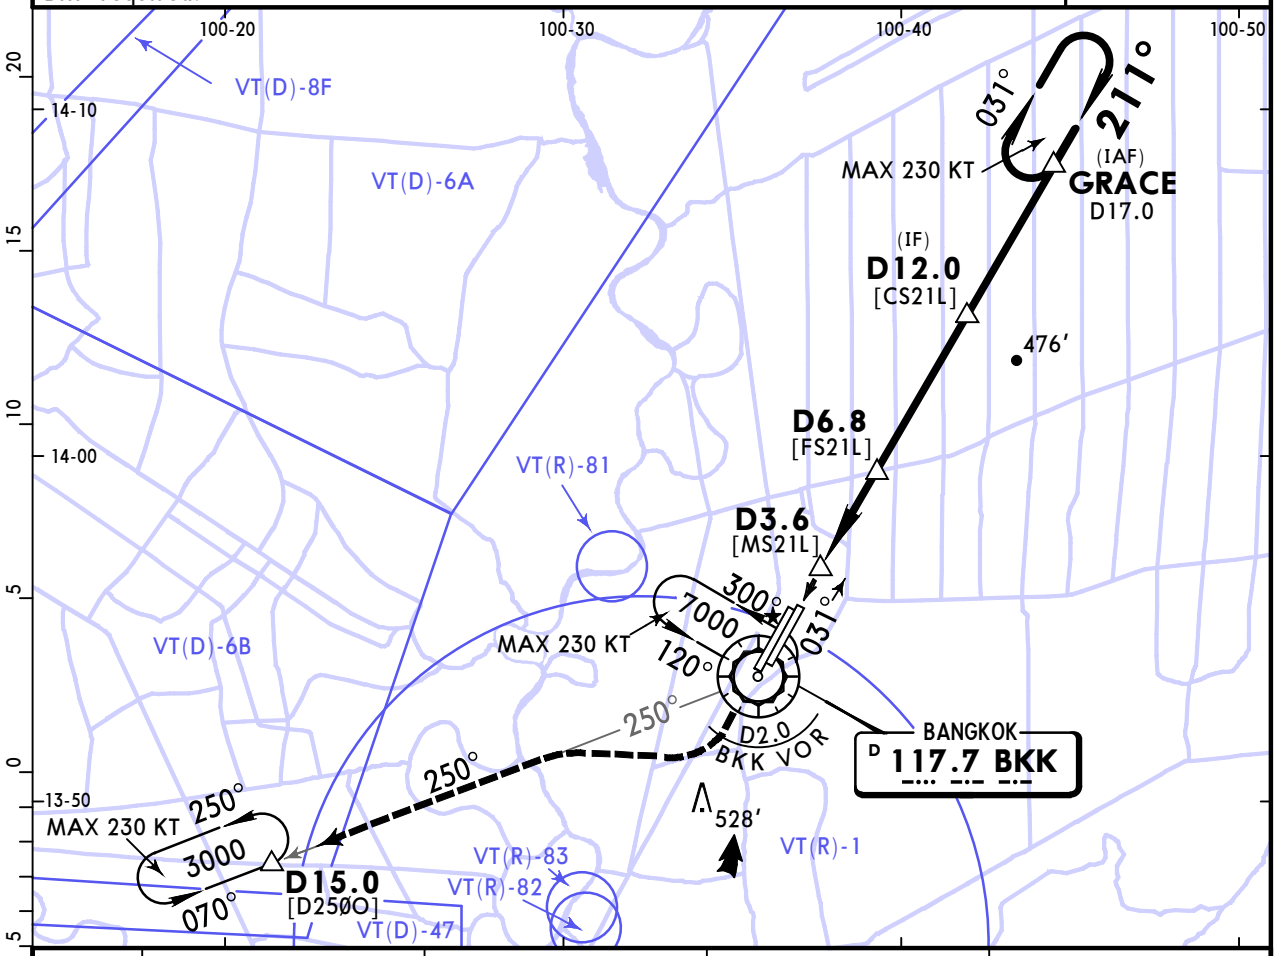

BKK DME	3.6	4.0	5.0	6.0
ALTITUDE	520′	700′	1040′	1370′

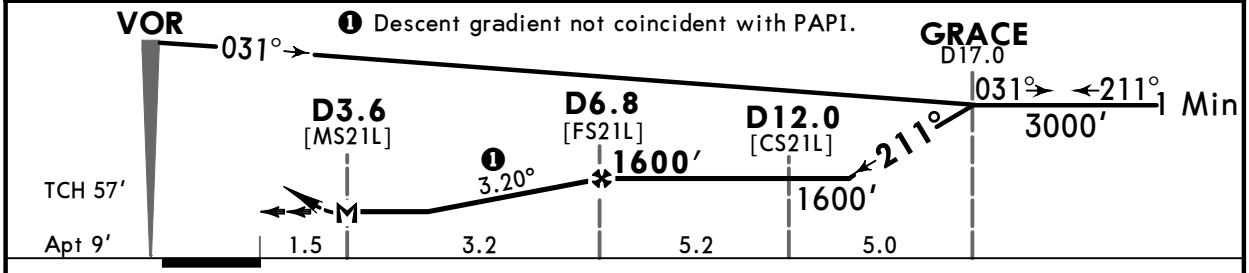

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.20°	396	510	566	679	793	906
MAP at D3.6							
FAF to MAP	3.2	2:45	2:08	1:55	1:36	1:22	1:12

PALS CAT I
PAPI PAPI

BKK
117.7

PANS OPS

Std STRAIGHT-IN LANDING

CDFA

1 DA/MDA(H) **520′**(511′)

ALS out

A	R1500m	
B		
C	R1600m	R2400m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	800′(791′)	V1500m
135	800′(791′)	V1600m
180	800′(791′)	V2400m
205	1100′(1091′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Airspaces.

© JEPPESEN, 1998, 2026. ALL RIGHTS RESERVED.