VTSB/URT


Apt Elev **20′**
N09 08.0 E099 08.1

JEPPESEN **SURAT THANI, THAILAND**

22 NOV 24 (10-9) **Eff 28 Nov**

SURAT THANI

*ATIS	*SURAT THANI Ground	*Tower
125.95	121.9	122.7

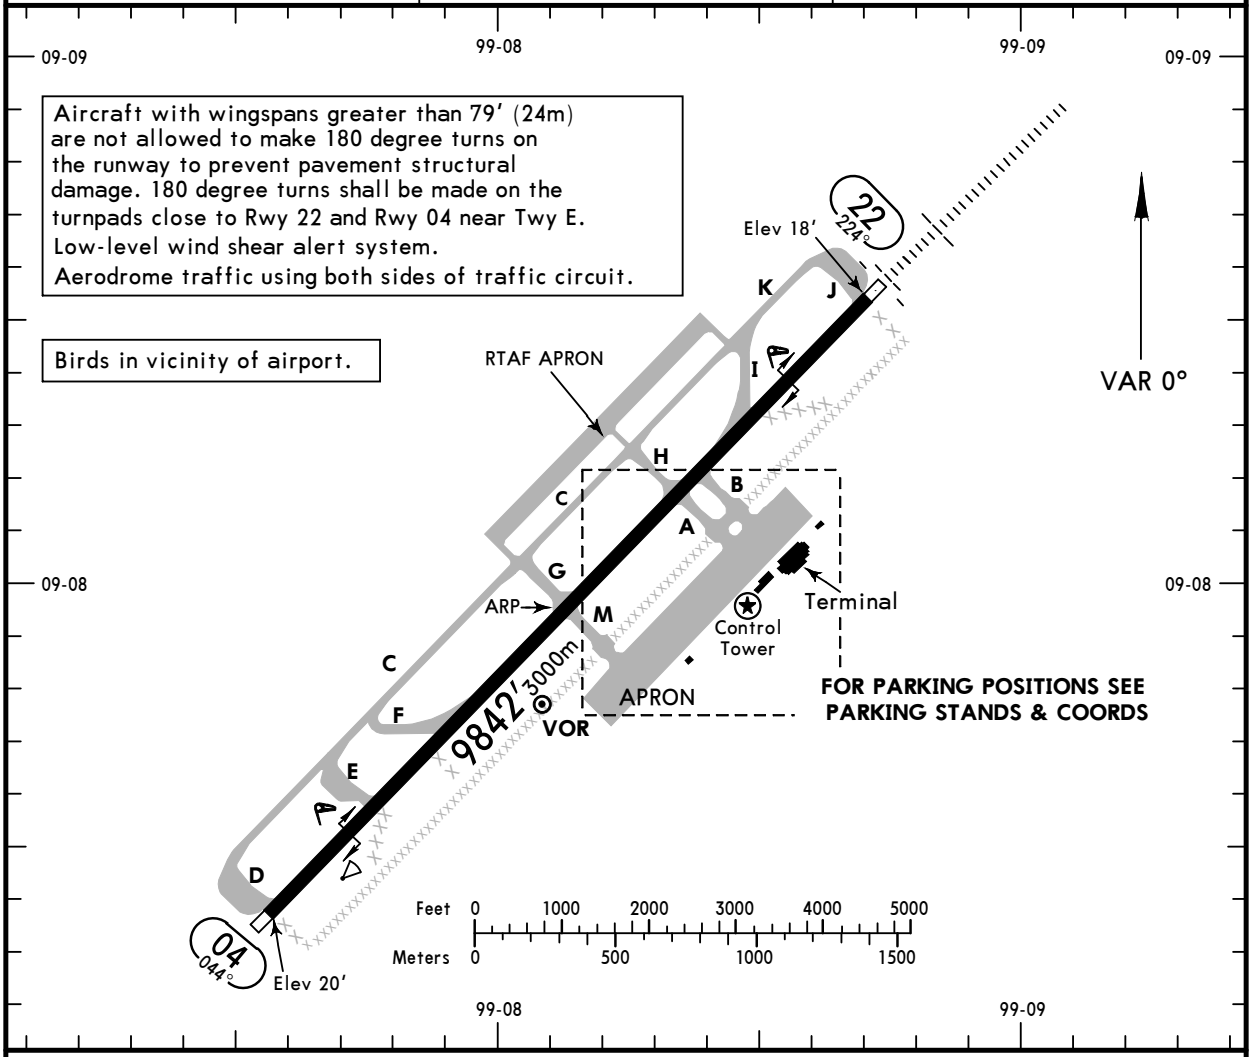

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND — Threshold	Glide Slope	TAKE-OFF	WIDTH
04	HIRL(60m) PAPI-L (angle 3.0°, MEHT 53′) RVR				148′ 45m
22	HIRL(60m) ❶ PALS CAT I PAPI-L (angle 3.0°, MEHT 58′)		8710′ 2655m		

❶ length 900m


TAKE-OFF

AIR CARRIER (JAA)

	LVP must be in Force All Rwys RCLM (DAY only) or RL	All Rwys RCLM (DAY only) or RL
A	250m	400m
B		
C		
D	300m	

CHANGES: Twy A and B reopened, stopway, apron, building.

© JEPPESEN, 1999, 2024. ALL RIGHTS RESERVED.

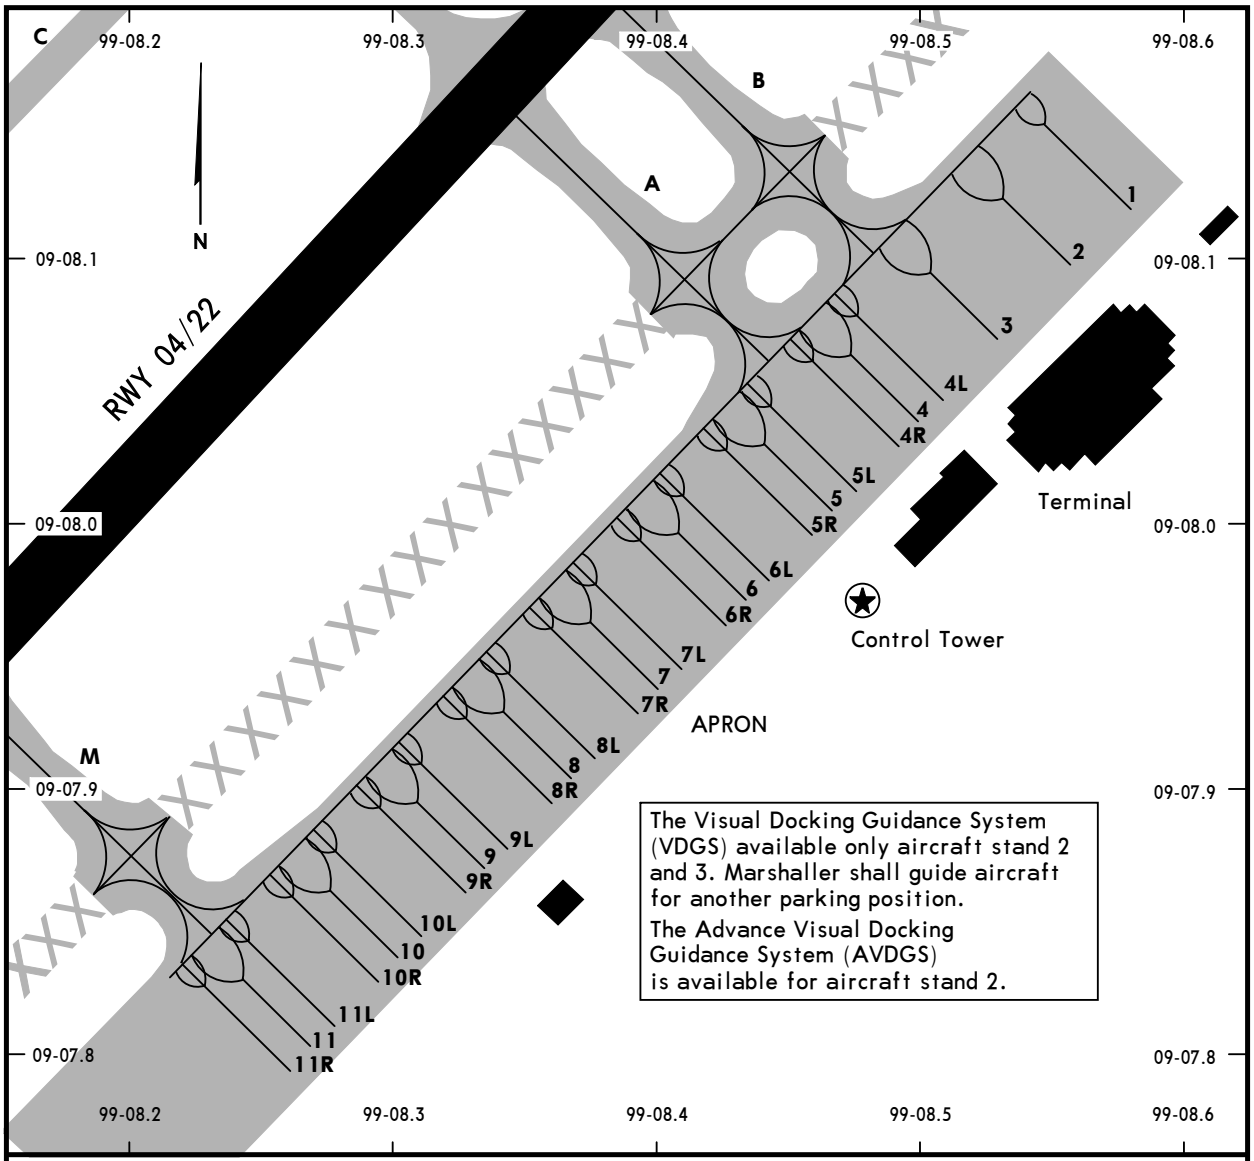

PARKING SPOTS COORDINATES


SPOT No.	COORDINATES	CAPACITY
1	N 09 08.1 E 099 08.6	A320/B737
2	N 09 08.1 E 099 08.6	A330/B777
3	N 09 08.1 E 099 08.5	A330/B777
4, 5	N 09 08.0 E 099 08.5	A330/B777
4L, 4R, 5L, 5R	N 09 08.0 E 099 08.5	A320/B737
6	N 09 08.0 E 099 08.4	A330/B777
6L, 6R	N 09 08.0 E 099 08.4	A320/B737
7, 8	N 09 07.9 E 099 08.4	A330/B777
7L, 7R, 8L, 8R	N 09 07.9 E 099 08.4	A320/B737
9	N 09 07.9 E 099 08.3	A330/B777
9L, 9R	N 09 07.9 E 099 08.3	A320/B737
10, 11	N 09 07.8 E 099 08.3	A330/B777
10L, 10R, 11L, 11R	N 09 07.8 E 099 08.3	A320/B737

CHANGES: Twy A and B reopened, apron, building.

© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

Apt Elev	
20	Trans alt: 11000 1. OMNIDIRECTIONAL departures during take-off and initial climb-out are permitted during the day and night. ATC clearance to execute an OMNIDIRECTIONAL depature may be issued upon request of the pilot or upon initiative of the ATC and accepted by the pilot. 2. The pilot shall be maintaining a minimum climb gradient up to specific altitude as published shown as below. 3. The pilot shall be responsible for adherence to such obtained ATC clearance. 4. The pilot prior to take-off shall agree to execute this procedure. 5. The ATC clearance shall be readback.

OMNI DEPARTURE
[OMNI]
(ALL RWYS)

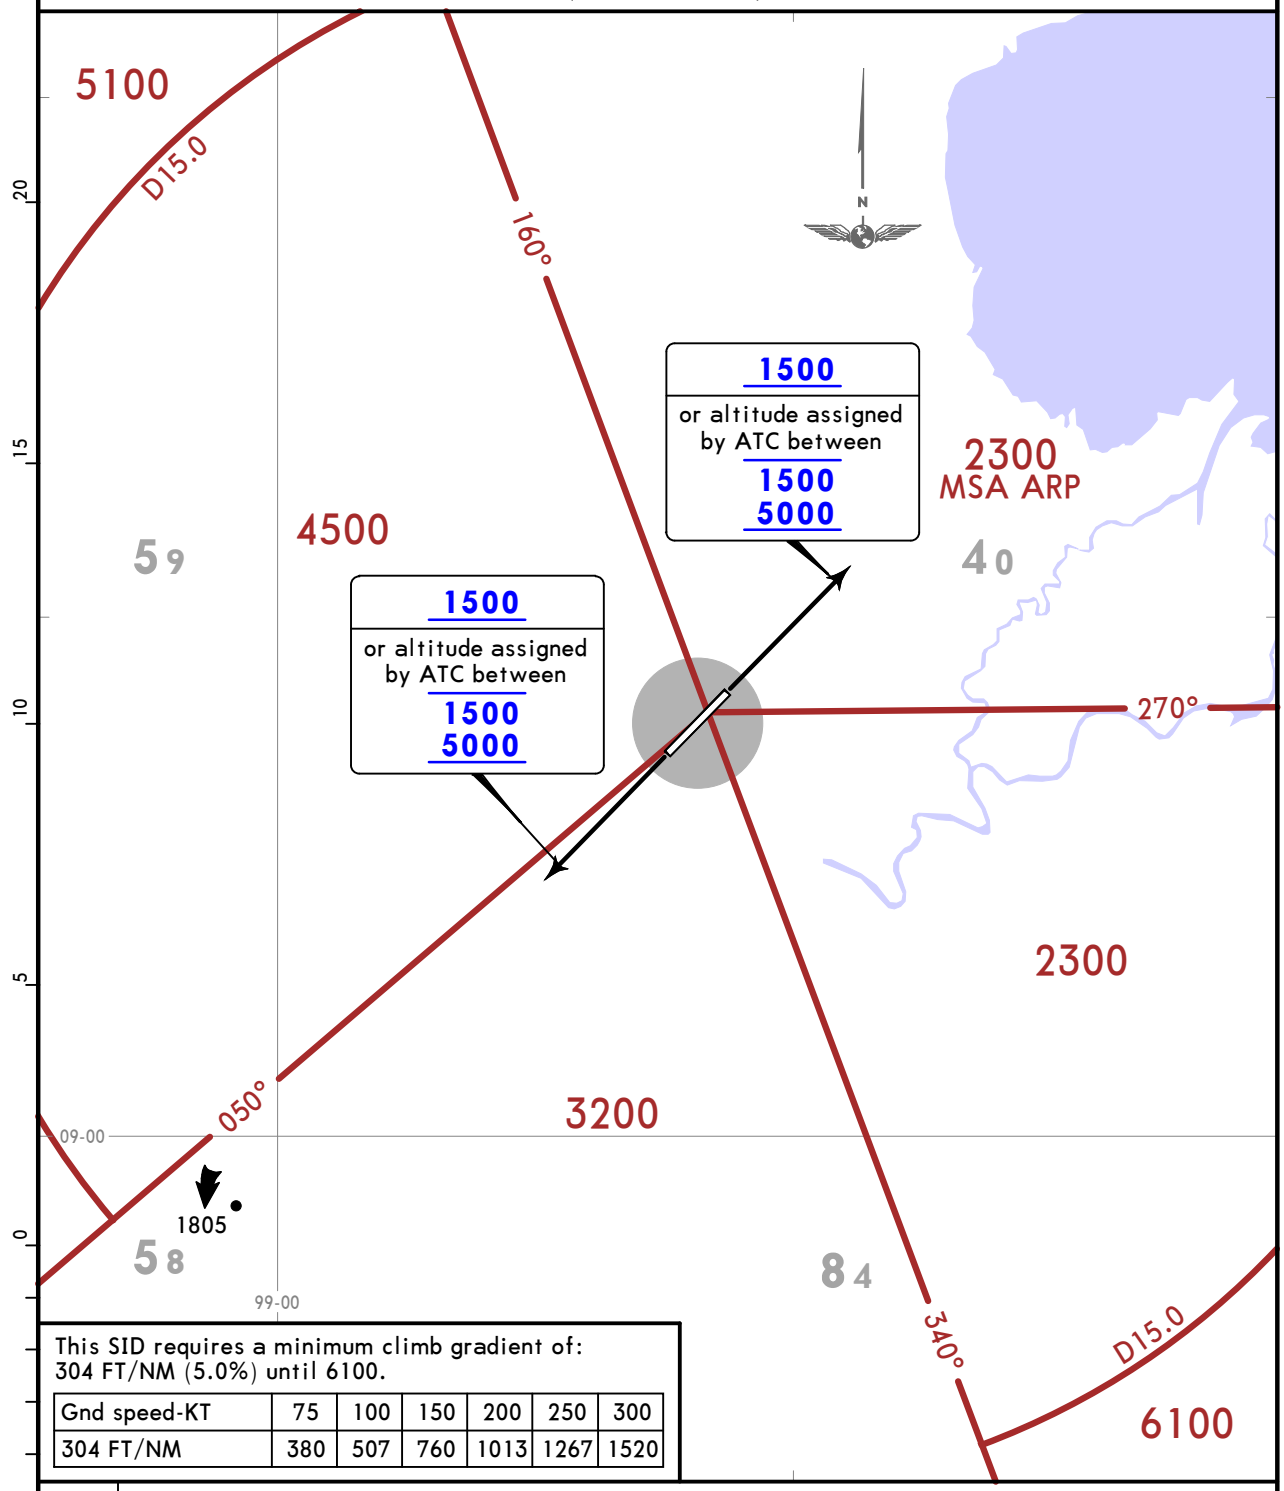

This SID requires a minimum climb gradient of:
304 FT/NM (5.0%) until 6100.

Gnd speed-KT	75	100	150	200	250	300
304 FT/NM	380	507	760	1013	1267	1520


RWY	INITIAL CLIMB
04	No turn before DER. After departure climb stright ahead until 1500 (or altitude assigned by ATC between 1500 - 5000), then comply with ATC clearance issued (or as directed by ATC).
22	No turn before DER. After departure climb stright ahead until 1500 (or altitude assigned by ATC between 1500 - 5000), then comply with ATC clearance issued (or as directed by ATC).

CHANGES: New procedure at this airport.

© JEPPESEN, 2023. ALL RIGHTS RESERVED.

SURAT THANI, THAILAND

JEPPESEN
22 MAR 19 (10-3A) Eff 28 Mar
RNAV SID

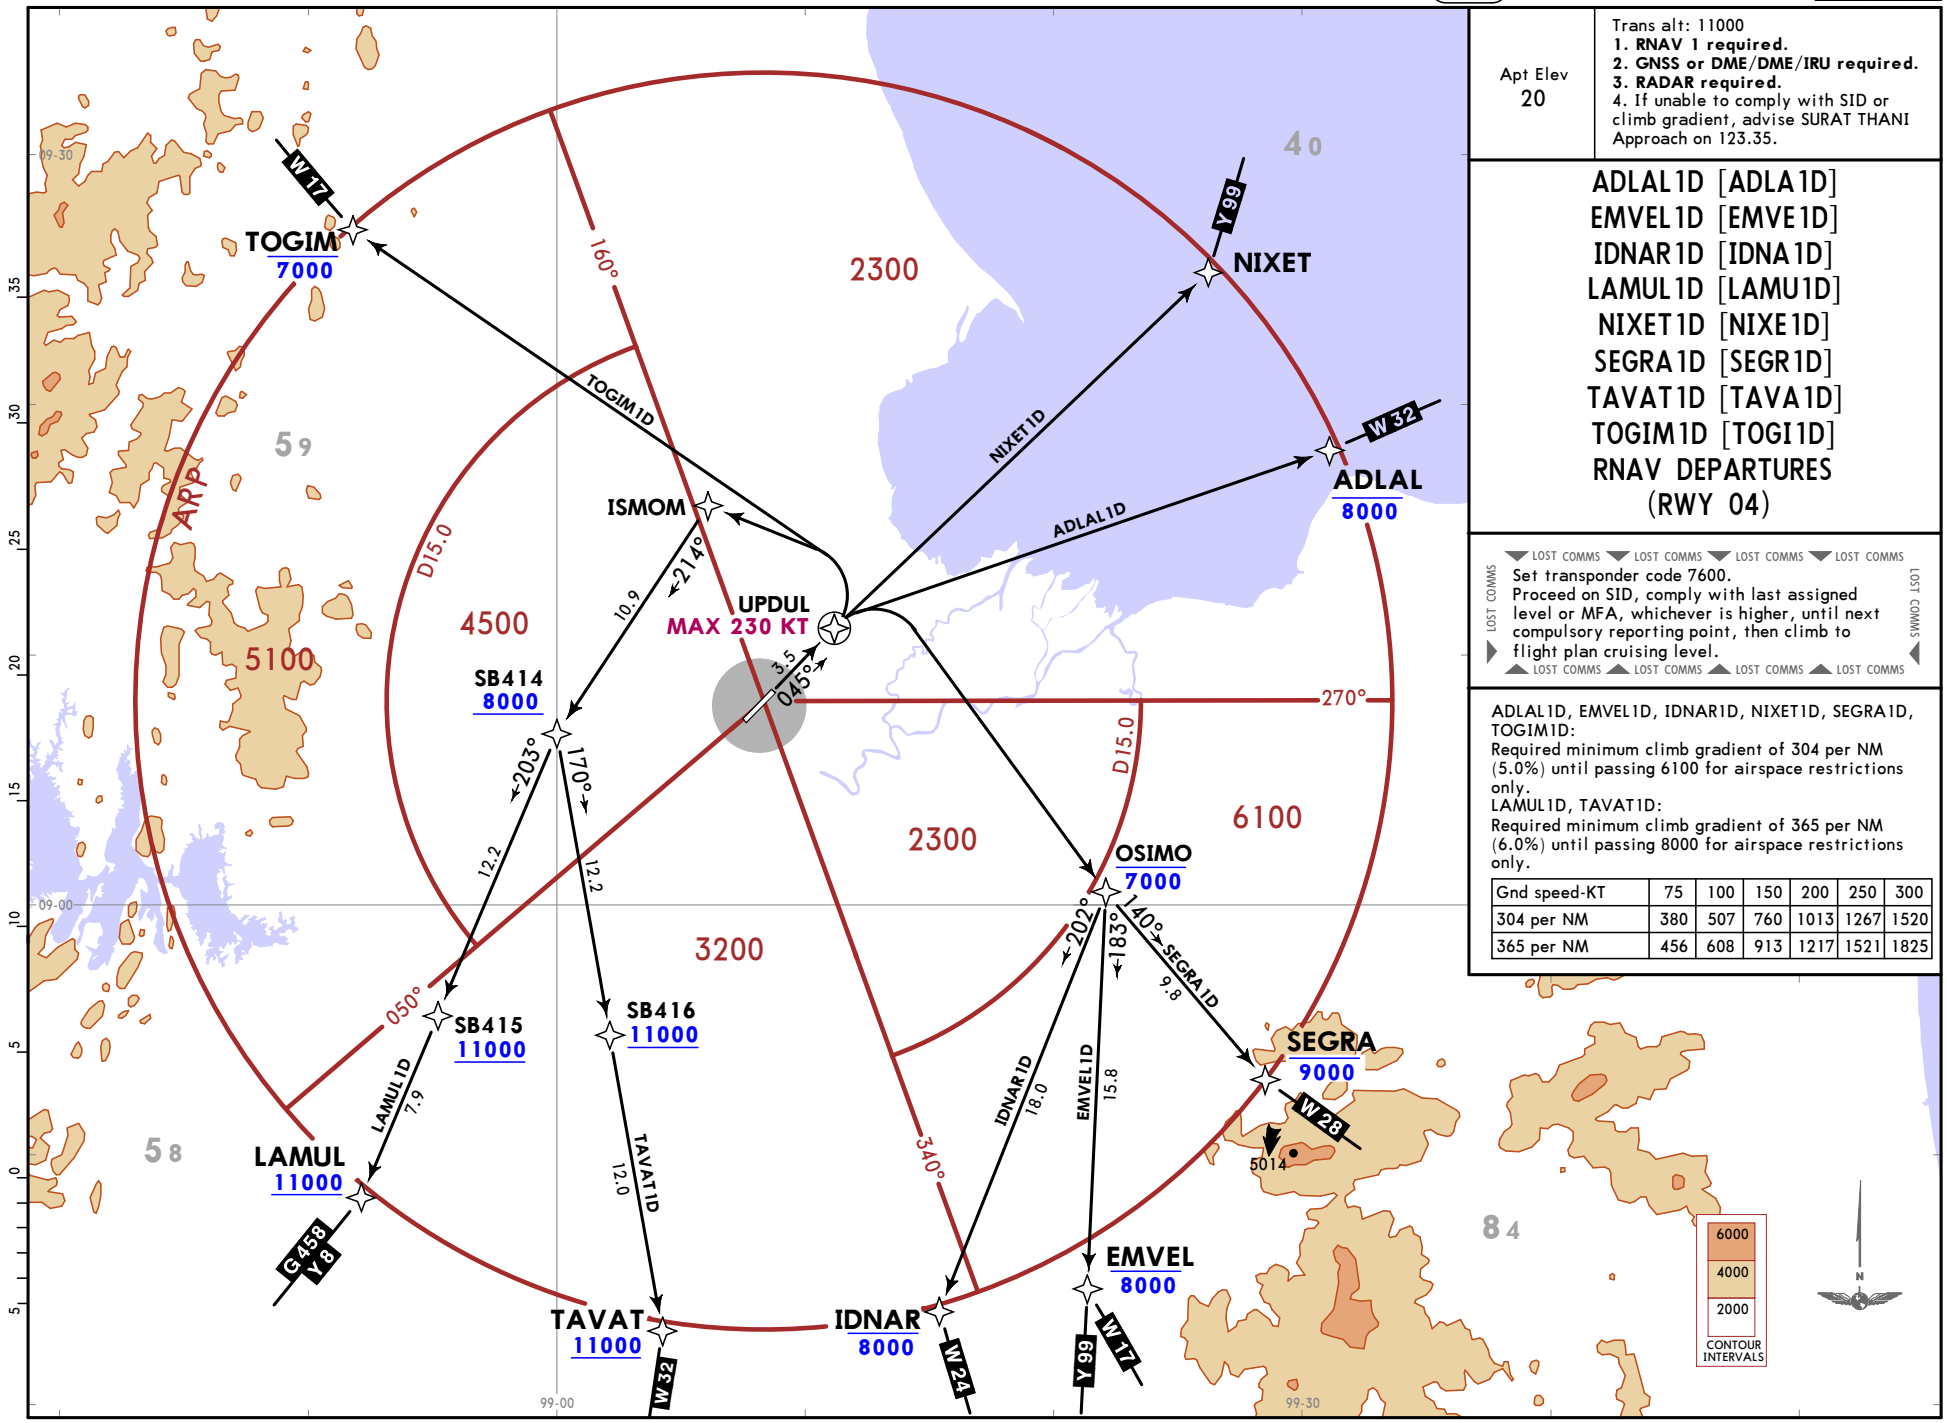

Apt Elev
20

Trans alt: 11000
1. **RNAV 1 required.**
2. **GNSS or DME/DME/IRU required.**
3. **RADAR required.**
4. If unable to comply with SID or climb gradient, advise SURAT THANI Approach on 123.35.

ADLAL1D [ADLA1D]
EMVEL1D [EMVE1D]
IDNAR1D [IDNA1D]
LAMUL1D [LAMU1D]
NIXET1D [NIXE1D]
SEGRA1D [SEGR1D]
TAVAT1D [TAVA1D]
TOGIM1D [TOGI1D]
RNAV DEPARTURES
(RWY 04)

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

ADLAL1D, EMVEL1D, IDNAR1D, NIXET1D, SEGRA1D, TOGIM1D:
Required minimum climb gradient of 304 per NM (5.0%) until passing 6100 for airspace restrictions only.
LAMUL1D, TAVAT1D:
Required minimum climb gradient of 365 per NM (6.0%) until passing 8000 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
304 per NM	380	507	760	1013	1267	1520
365 per NM	456	608	913	1217	1521	1825


CHANGES: New procedures at this airport.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.

JEPPESEN
22 MAR 19 10-3 Eff 28 Mar

SURAT THANI, THAILAND

RNAV SID

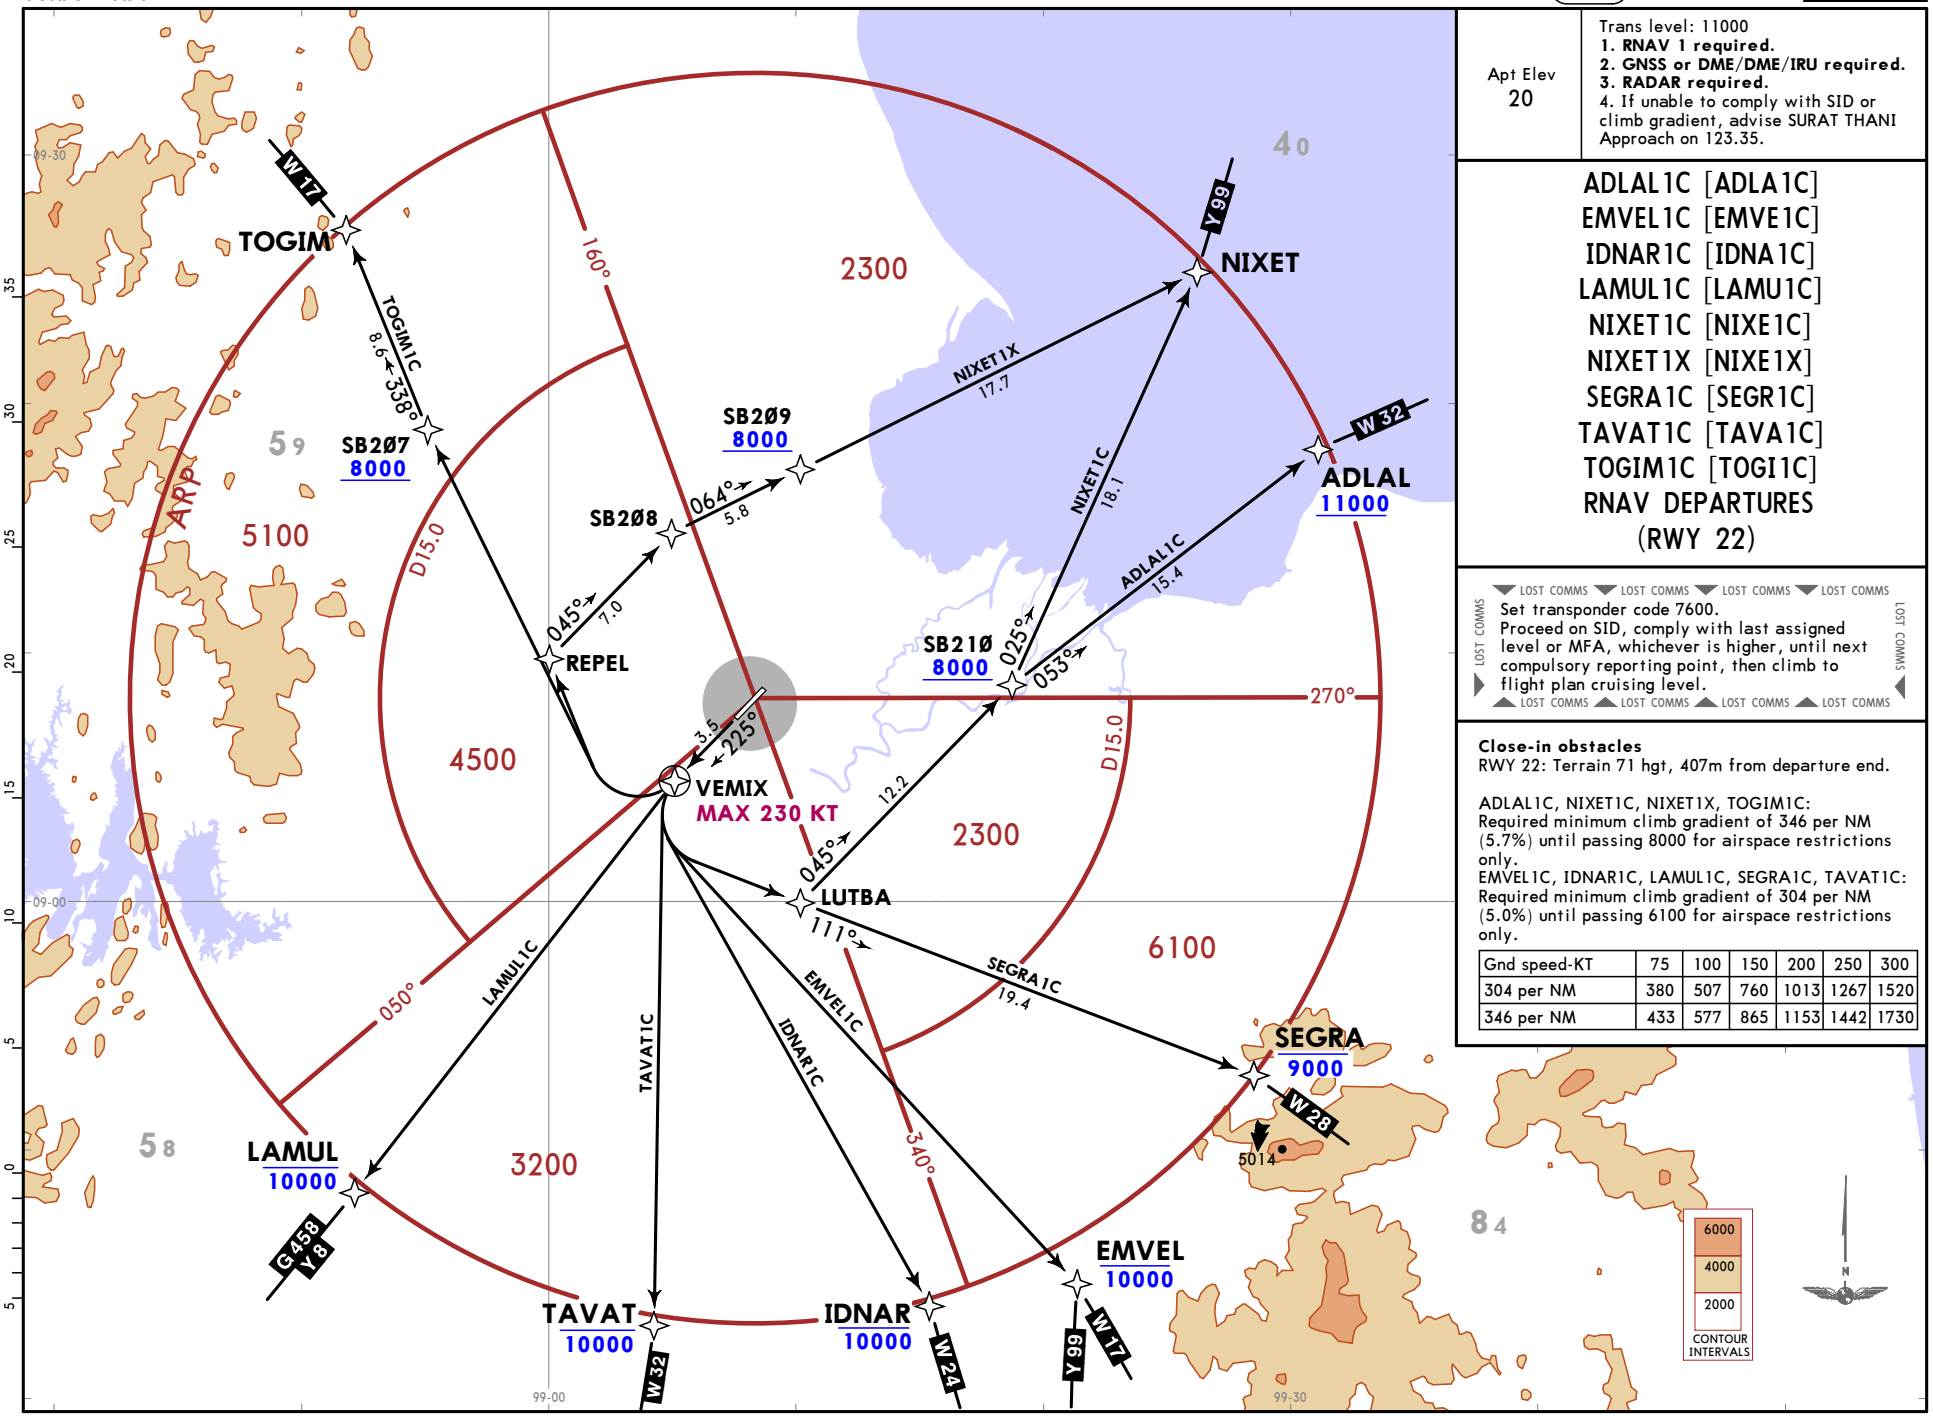

Apt Elev
20

Trans level: 11000
1. RNAV 1 required.
2. GNSS or DME/DME/IRU required.
3. RADAR required.
4. If unable to comply with SID or climb gradient, advise SURAT THANI Approach on 123.35.

ADLAL1C [ADLA1C]
EMVEL1C [EMVE1C]
IDNAR1C [IDNA1C]
LAMUL1C [LAMU1C]
NIXET1C [NIXE1C]
NIXET1X [NIXE1X]
SEGRA1C [SEGR1C]
TAVAT1C [TAVA1C]
TOGIM1C [TOGI1C]
RNAV DEPARTURES
(RWY 22)

LOST COMMS
Set transponder code 7600.
Proceed on SID, comply with last assigned level or MFA, whichever is higher, until next compulsory reporting point, then climb to flight plan cruising level.

Close-in obstacles
RWY 22: Terrain 71 hgt, 407m from departure end.

ADLAL1C, NIXET1C, NIXET1X, TOGIM1C:
Required minimum climb gradient of 346 per NM (5.7%) until passing 8000 for airspace restrictions only.
EMVEL1C, IDNAR1C, LAMUL1C, SEGRA1C, TAVAT1C:
Required minimum climb gradient of 304 per NM (5.0%) until passing 6100 for airspace restrictions only.

Gnd speed-KT	75	100	150	200	250	300
304 per NM	380	507	760	1013	1267	1520
346 per NM	433	577	865	1153	1442	1730


CHANGES: New procedures at this airport.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.

VTSB/URT
SURAT THANI

JEPPESEN 22 MAR 19 (10-2A) Eff 28 Mar

SURAT THANI, THAILAND
RNAV STAR

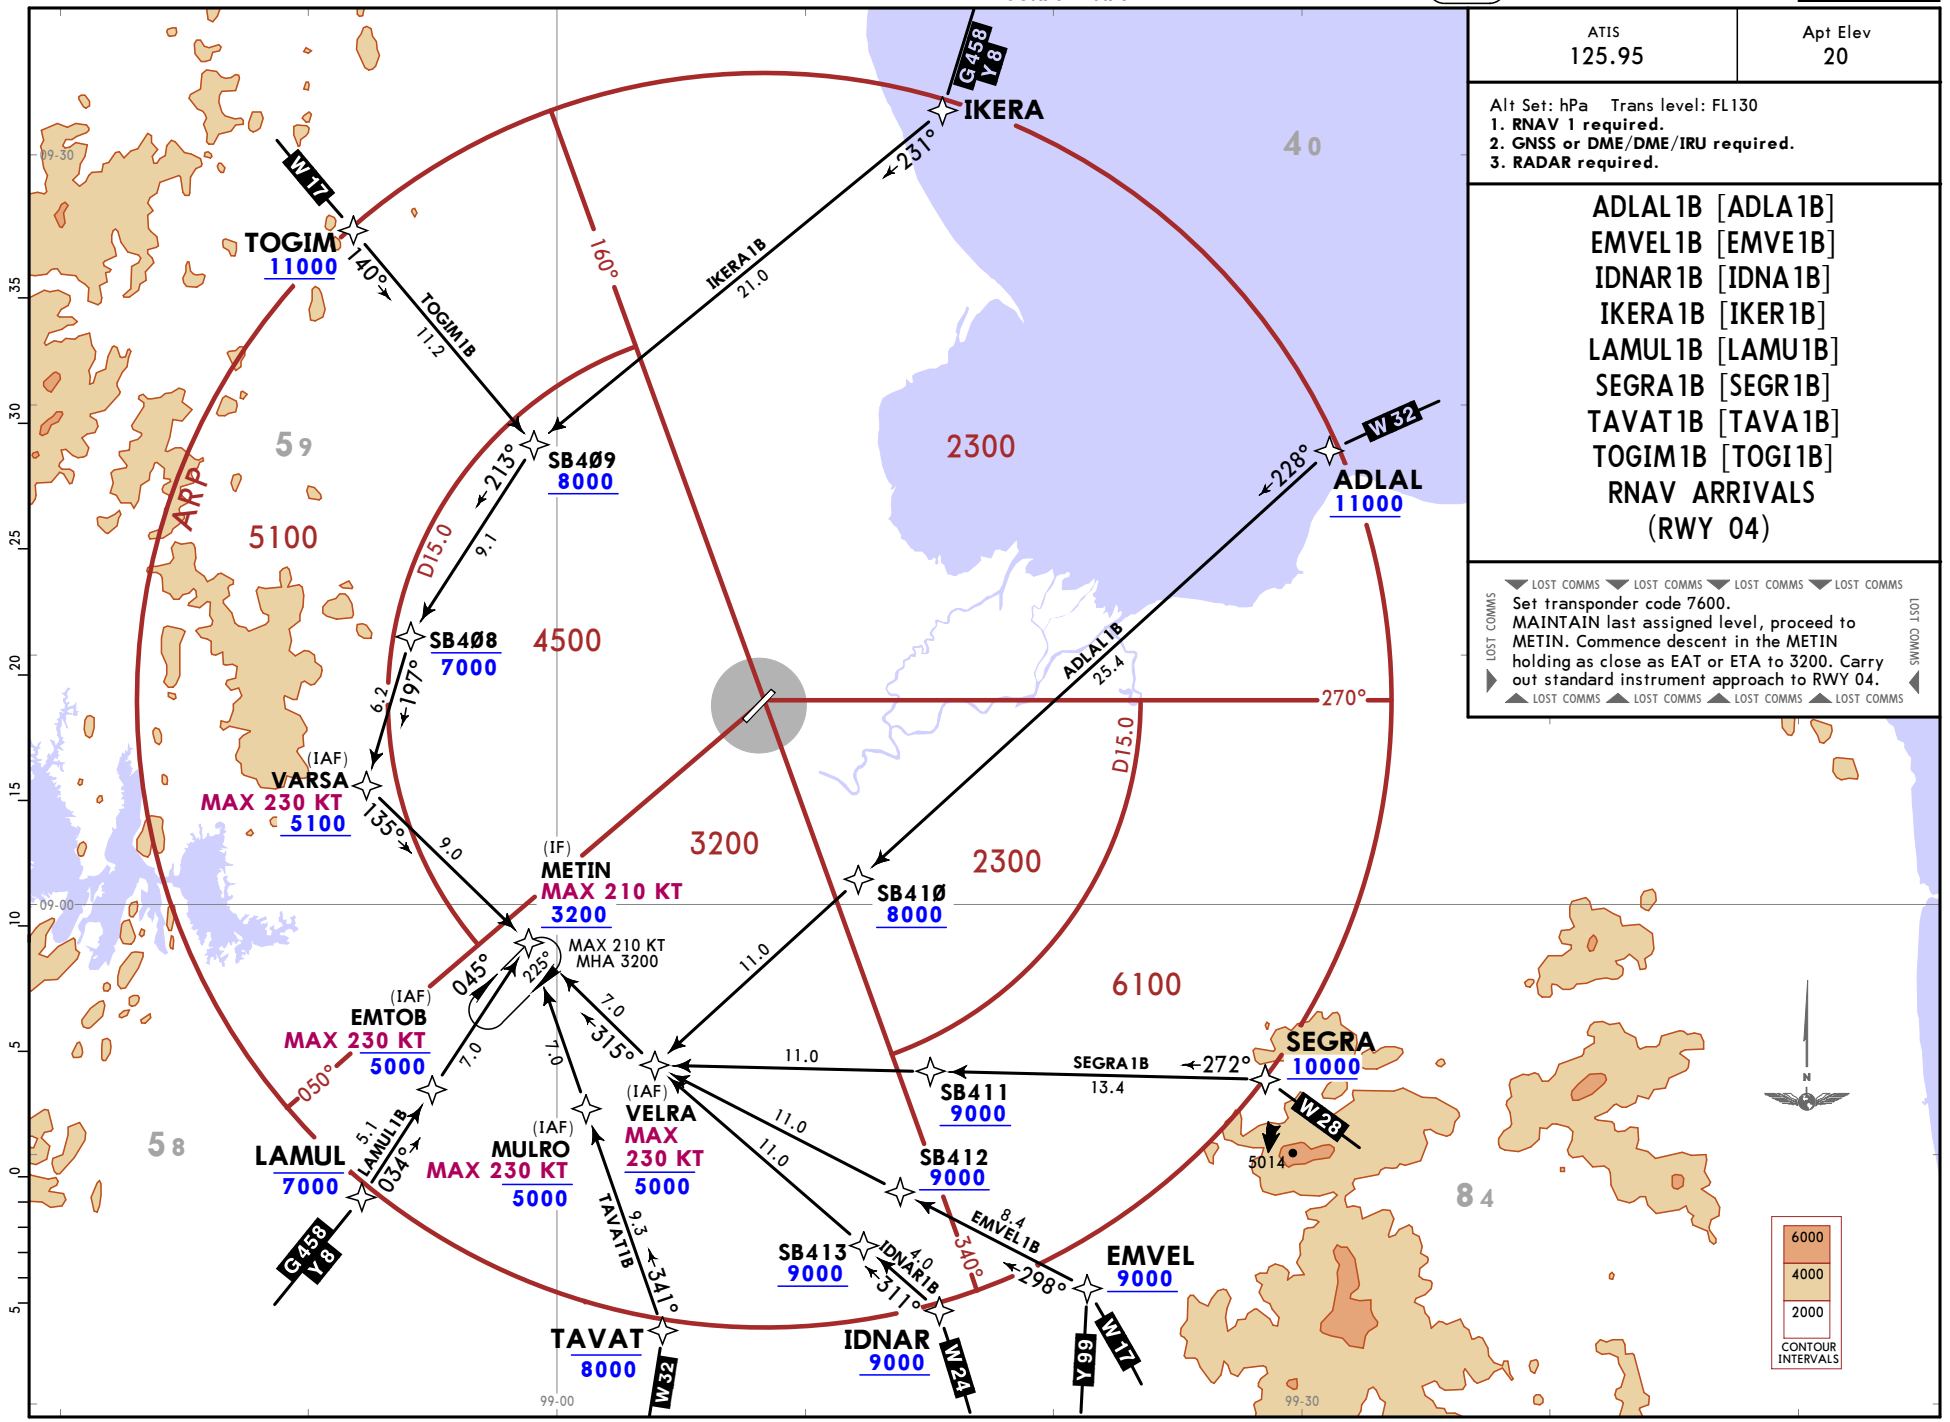

ATIS	Apt Elev
125.95	20

Alt Set: hPa Trans level: FL130
1. RNAV 1 required.
2. GNSS or DME/DME/IRU required.
3. RADAR required.

ADLAL1B [ADLA1B]
EMVEL1B [EMVE1B]
IDNAR1B [IDNA1B]
IKERA1B [IKER1B]
LAMUL1B [LAMU1B]
SEGRA1B [SEGR1B]
TAVAT1B [TAVA1B]
TOGIM1B [TOGI1B]
RNAV ARRIVALS
(RWY 04)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to METIN. Commence descent in the METIN holding as close as EAT or ETA to 3200. Carry out standard instrument approach to RWY 04.

CHANGES: New procedures at this airport.


© JEPPESEN, 2019. ALL RIGHTS RESERVED.

VTSB/URT
SURAT THANI

JEPPESEN
22 MAR 19 10-2 Eff 28 Mar

SURAT THANI, THAILAND

RNAV STAR

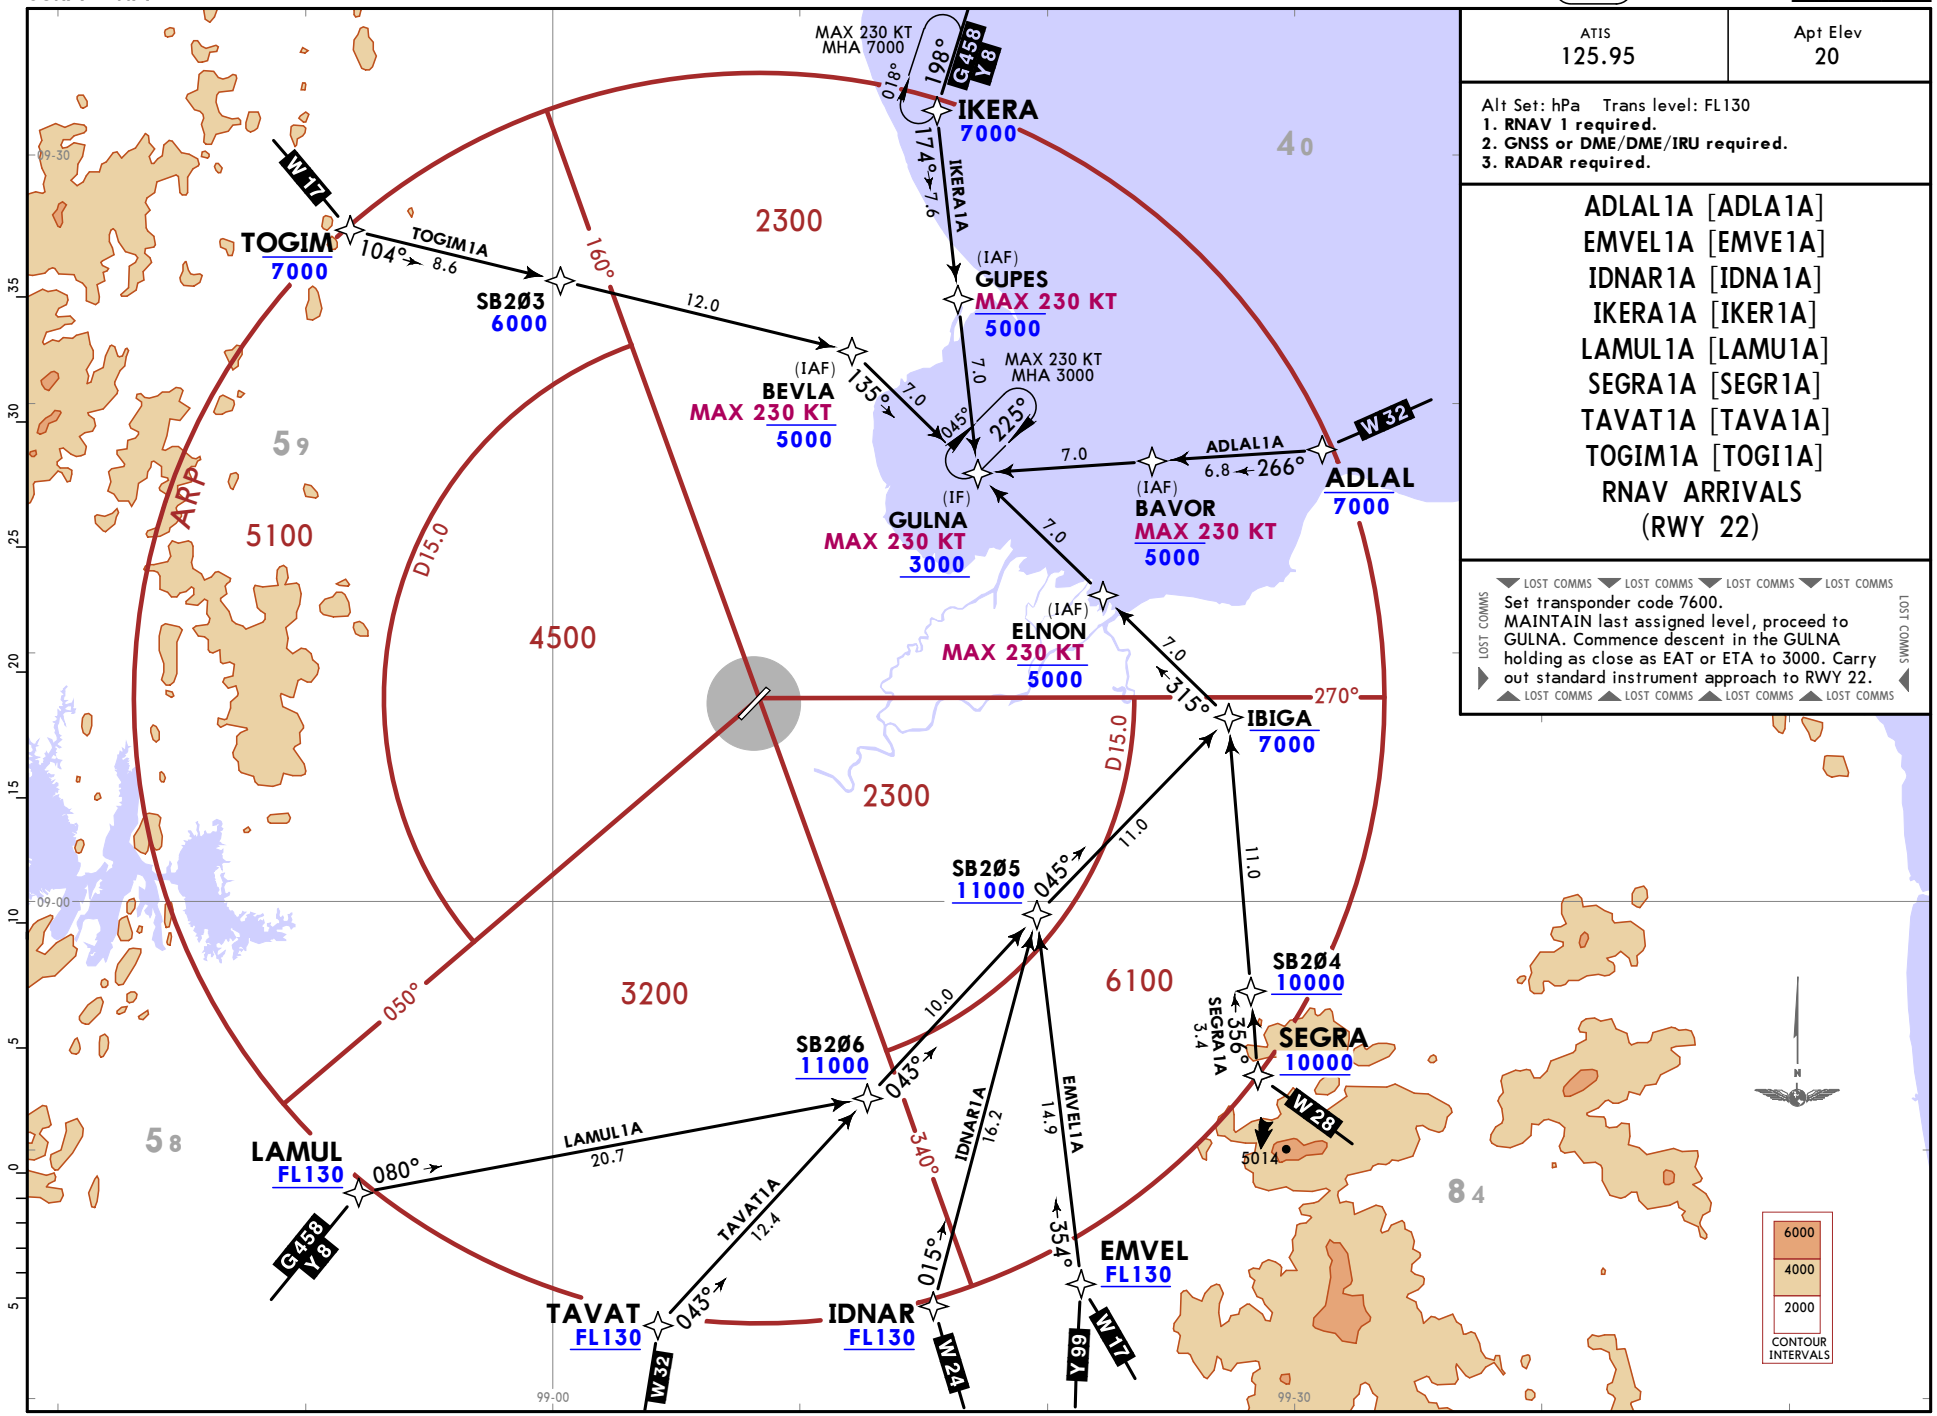

ATIS	Apt Elev
125.95	20

Alt Set: hPa Trans level: FL130
1. RNAV 1 required.
2. GNSS or DME/DME/IRU required.
3. RADAR required.

ADLAL1A [ADLA1A]
EMVEL1A [EMVE1A]
IDNAR1A [IDNA1A]
IKERA1A [IKER1A]
LAMUL1A [LAMU1A]
SEGRA1A [SEGR1A]
TAVAT1A [TAVA1A]
TOGIM1A [TOGI1A]
RNAV ARRIVALS
(RWY 22)

LOST COMMS
Set transponder code 7600.
MAINTAIN last assigned level, proceed to GULNA. Commence descent in the GULNA holding as close as EAT or ETA to 3000. Carry out standard instrument approach to RWY 22.

CHANGES: New procedures at this airport.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.

VTSB/URT
SURAT THANI

JEPPESEN 17 MAR 23 (11-1) Eff 23 Mar

SURAT THANI, THAILAND
ILS or LOC Z Rwy 22

*ATIS	*SURAT Approach (R)	*SURAT THANI Tower	*Ground
125.95	129.6 123.35	122.7	121.9

BRIEFING STRIP ™


LOC ISTN	Final Apch Crs	SB2Ø2	ILS DA(H)	Apt Elev 20′
109.5	225°	2200′(2182′)	280′(262′)	Rwy 18′

MISSED APCH: Climb on track 225° to 1200′, then turn LEFT direct to GOVDA. Continue to ELNON then GULNA at 3000′ and hold or as directed by ATC.
Speed restricted to MAX 200 KT until after turn. No turn before MAP (for LOC only).


Alt Set: hPa | Rwy Elev: 1 hPa | Trans level: FL130 | Trans alt: 11000′

RNAV 1 required
1. GNSS or DME/DME/IRU required. 2. RADAR required. 3. DME required.

MSA ARP
❶ 4500′ within 15NM
❷ 2300′ within 15NM

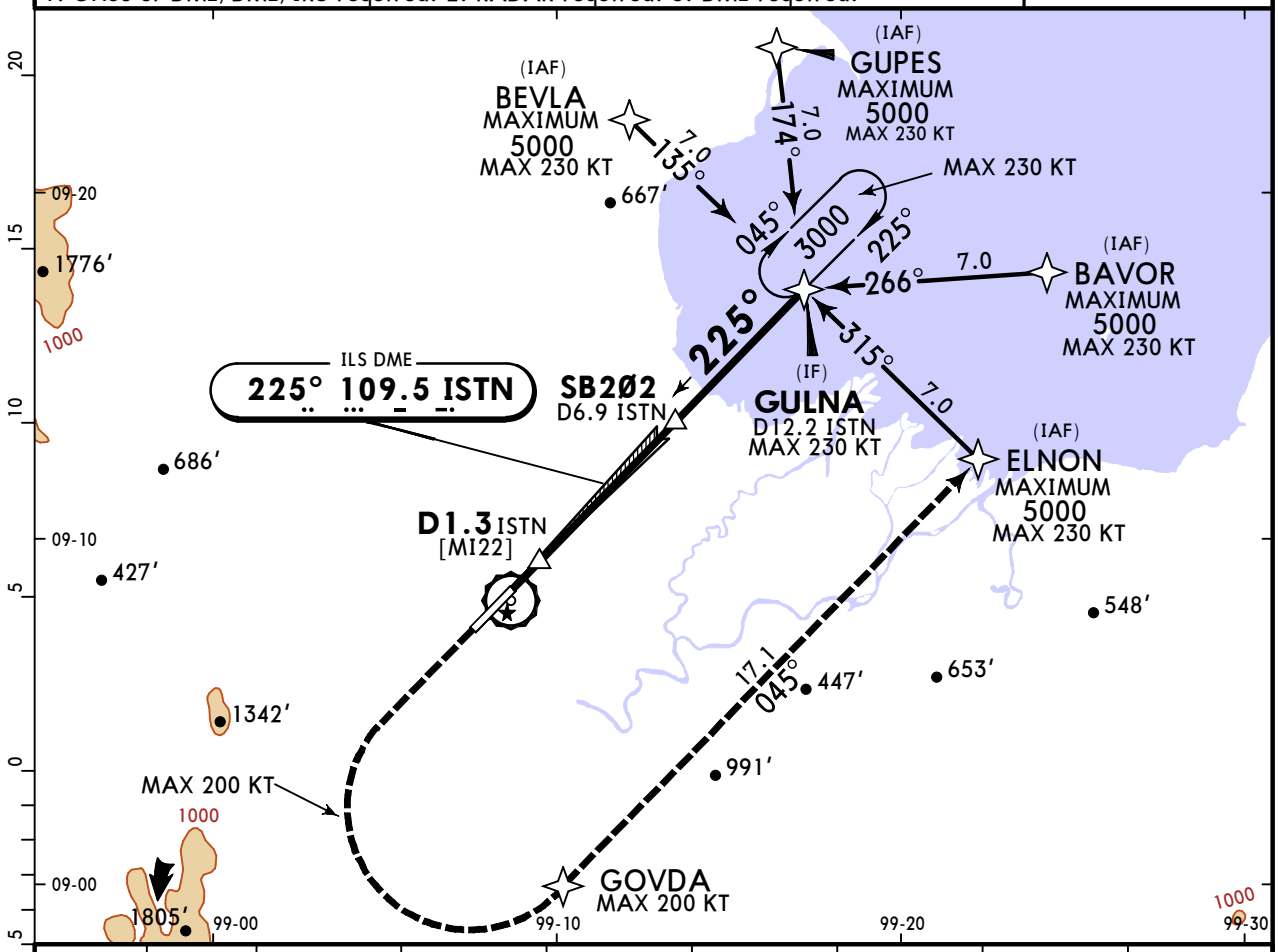

LOC (GS out)	ISTN DME	1.3	2.0	3.0	4.0	5.0	6.0	6.9
	ALTITUDE	420′	635′	950′	1270′	1585′	1900′	2200′

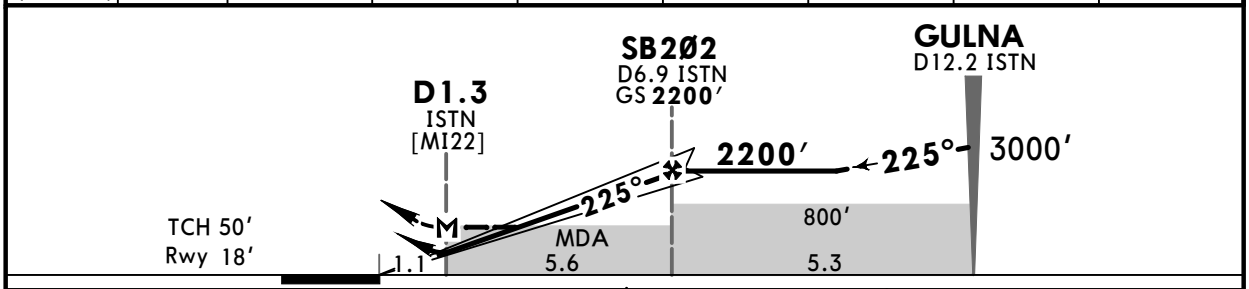

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at D1.3 ISTN							

ALSF-I
PAPI
1200′ on 225°

PANS OPS

STRAIGHT-IN LANDING RWY 22

	ILS DA(H) 280′(262′) FULL	ILS DA(H) 280′(262′) ALS out	LOC (GS out) MDA(H) 420′(402′)	LOC (GS out) MDA(H) 420′(402′) ALS out
A	900m	1200m	800m	1600m
B				
C			1200m	2000m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	860′ (840′)-1600m
135	860′ (840′)-2000m
180	860′(840′) -4000m
205	860′(840′) -4400m

CHANGES: Comms changed to part-time operation.

© JEPPESEN, 2019, 2023. ALL RIGHTS RESERVED.

VTSB/URT
SURAT THANI

JEPPESEN 9 JUL 21 (12-1) Eff 15 Jul

SURAT THANI, THAILAND
RNP Rwy 04


ATIS	SURAT Approach (R)		SURAT THANI Tower	Ground
125.95	129.6	123.35	122.7	121.9

BRIEFING STRIP™


RNAV	Final Apch Crs	SB4Ø3	LNAV/VNAV DA(H)	Apt Elev 20′
	045°	2200′ (2180′)	340′ (320′)	Rwy 20′

MISSED APCH: Climb on track 045° to 1200′, then turn RIGHT direct to URBAT. Continue to VELRA then METIN at 3200′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.


Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: FL 130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 15°C.		



MSA ARP
❶ 4500 within 15NM
❷ 2300 within 15NM

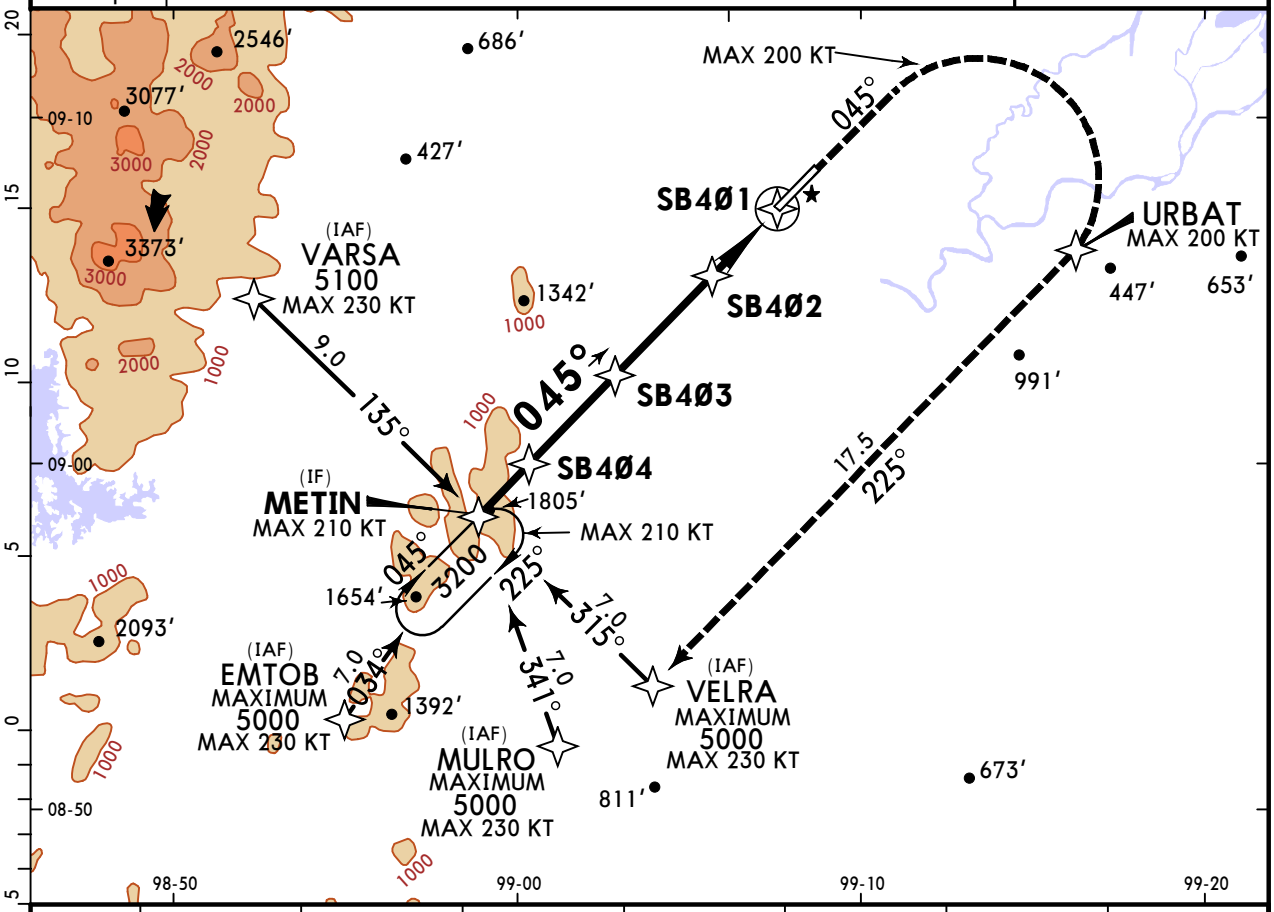

NM to THR	FAF	6.0	5.0	4.0	3.0	2.0	1.1
ALTITUDE	2200′	1965′	1650′	1335′	1020′	700′	420′

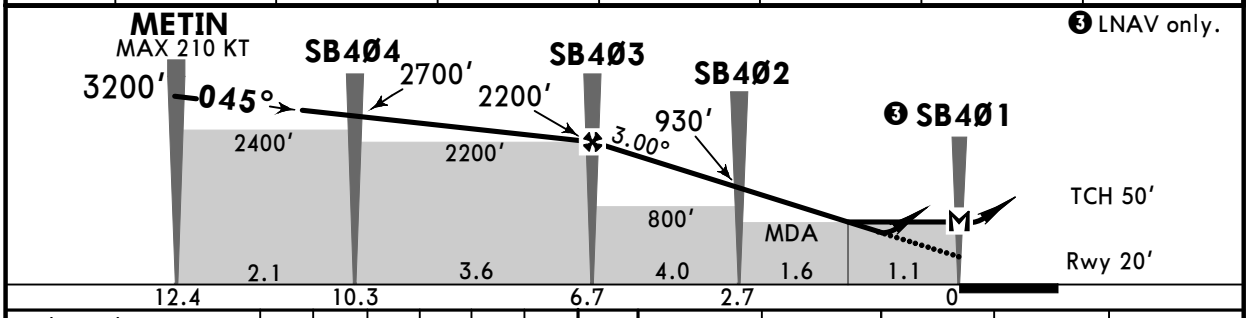

❸ LNAV only.

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at SB4Ø1							

PAPI-L | 1200′ on 045° | RT | URBAT

PANS OPS

STRAIGHT-IN LANDING RWY 04

	LNAV/VNAV DA(H) 340′ (320′)	LNAV MDA(H) 420′ (400′)
A	1600m	1600m
B		
C		
D		2000m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	860′ (840′)-1600m
135	860′ (840′)-2000m
180	860′ (840′)-4000m
205	860′ (840′)-4400m

CHANGES: Procedure title.

© JEPPESEN, 2014, 2021. ALL RIGHTS RESERVED.

VTSB/URT
SURAT THANI

JEPPESEN 9 JUL 21 (12-2) Eff 15 Jul

SURAT THANI, THAILAND
RNP Rwy 22


ATIS	SURAT Approach (R)		SURAT THANI Tower	Ground
125.95	129.6	123.35	122.7	121.9

BRIEFING STRIP ™


RNAV	Final Apch Crs	SB2Ø2	LNAV/VNAV DA(H)	Apt Elev 20′
	225°	2200′ (2182′)	350′ (332′)	Rwy 18′

MISSED APCH: Climb on track 225° to 1200′, then turn LEFT direct to GOVDA. Continue to ELNON then GULNA at 3000′ and hold or as directed by ATC.
No turn before MAP. Speed restricted to MAX 200 KT until after turn.


Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 15°C.		



MSA ARP
❶ 4500 within 15NM
❷ 2300 within 15NM

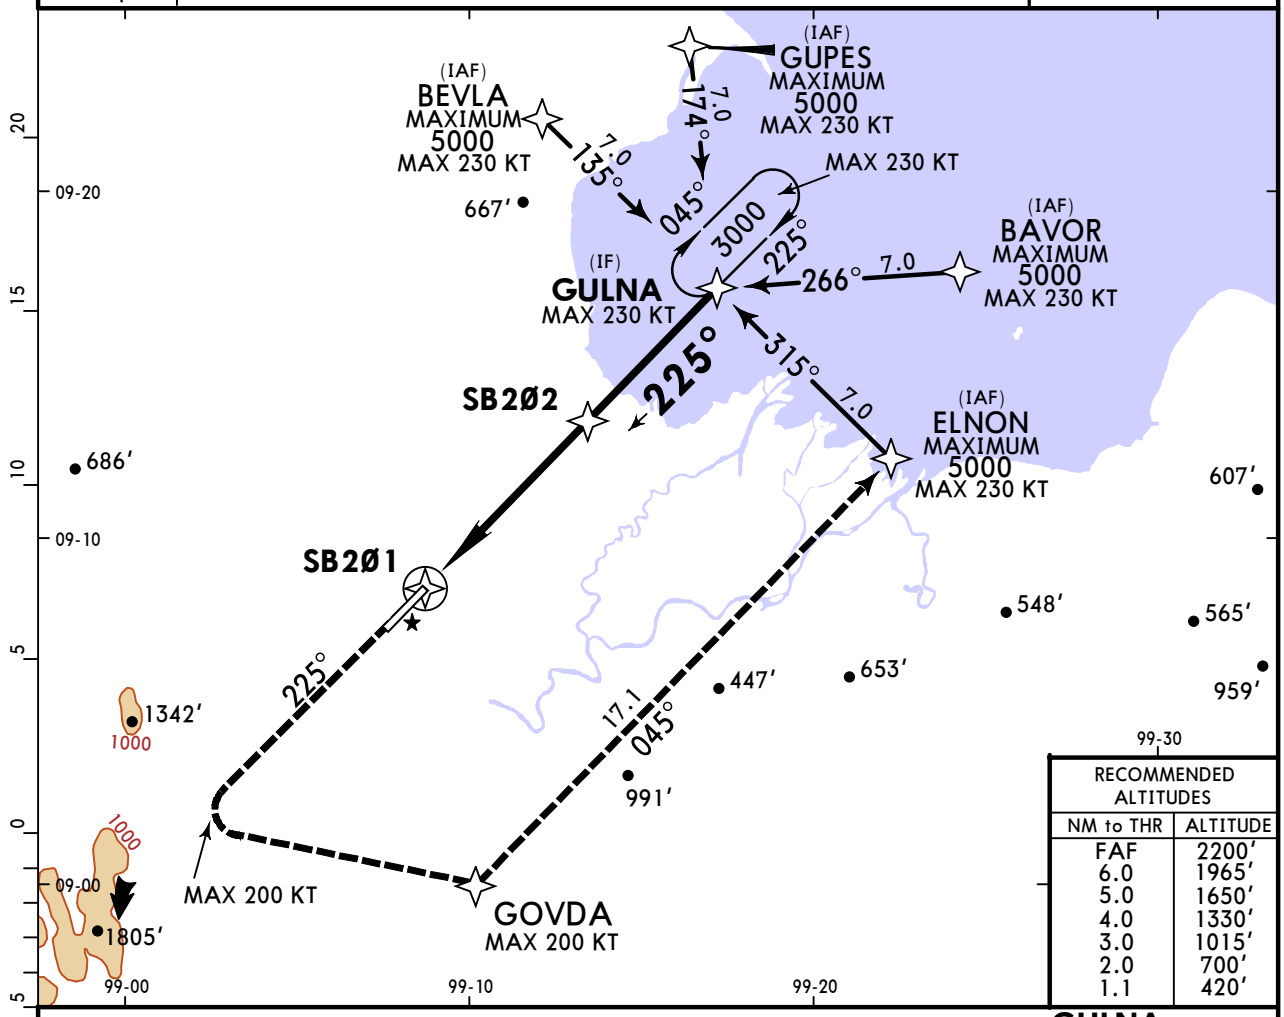

RECOMMENDED ALTITUDES	
NM to THR	ALTITUDE
FAF	2200′
6.0	1965′
5.0	1650′
4.0	1330′
3.0	1015′
2.0	700′
1.1	420′

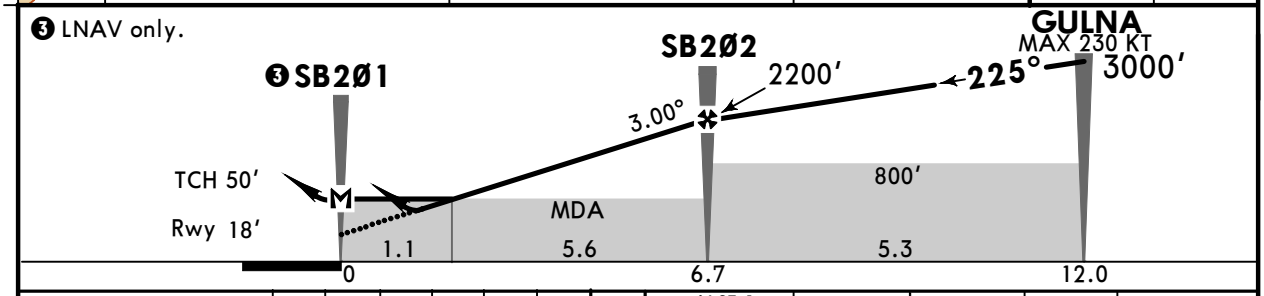

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at SB2Ø1						

ALSF-I
PAPI
1200′ on 225°
LT
GOVDA

PANS OPS

STRAIGHT-IN LANDING RWY 22

	LNAV/VNAV DA(H) 350′ (332′)		LNAV MDA(H) 420′ (402′)	
		ALS out		ALS out
A	800m	1600m	800m	1600m
B				
C			1200m	2000m
D	1600m		1600m	

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	860′(840′)-1600m
135	860′(840′)-2000m
180	860′(840′)-4000m
205	860′(840′)-4400m

CHANGES: Procedure title.

© JEPPESEN, 2013, 2021. ALL RIGHTS RESERVED.