
ATIS	U-TAPAO Ground	Tower
127.2	121.9	118.3

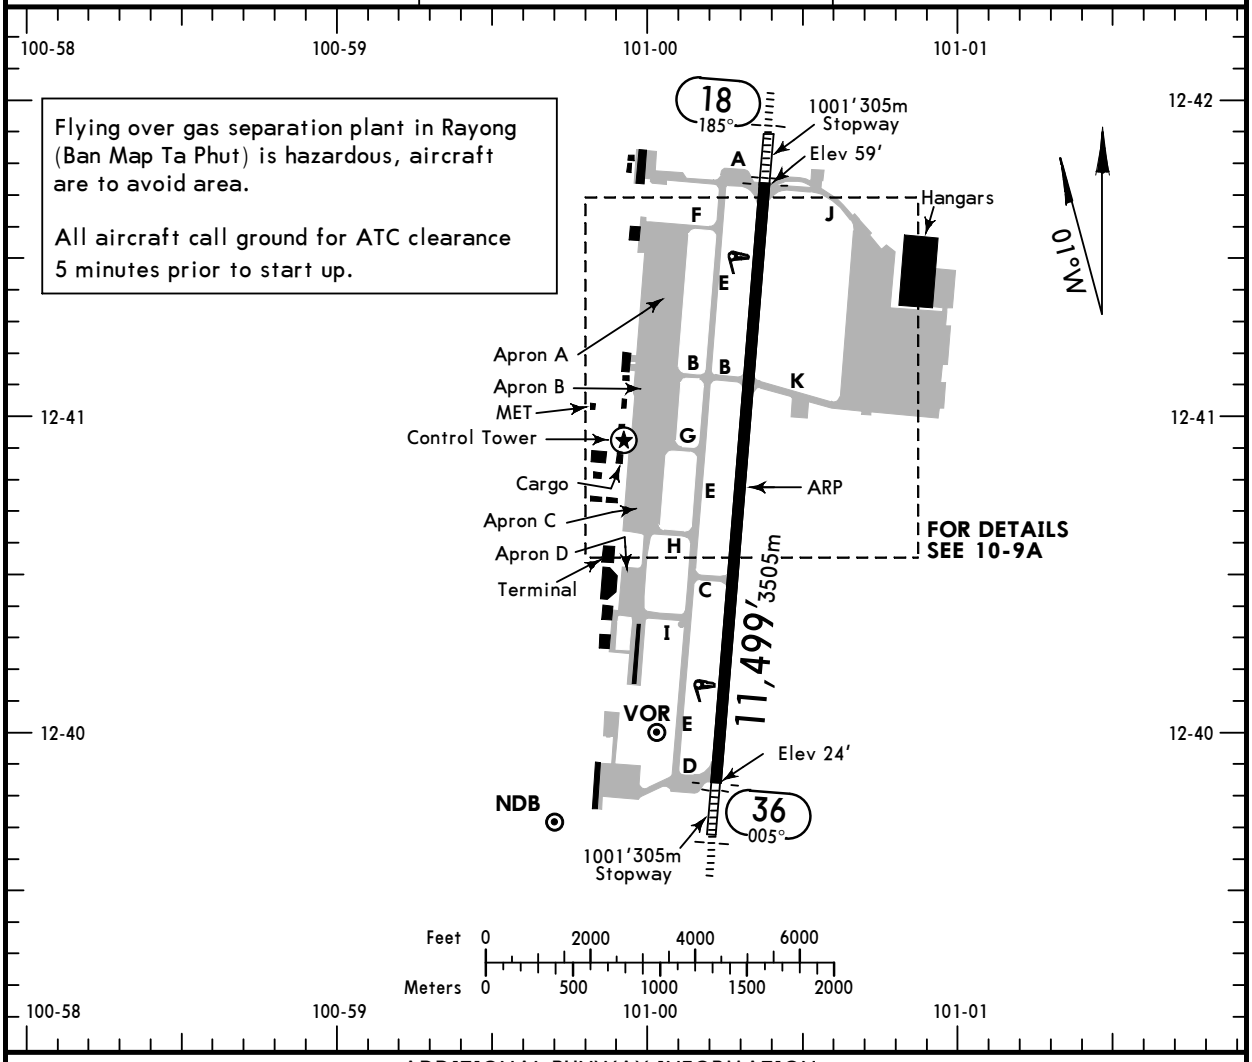

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS — LANDING BEYOND — Threshold	Glide Slope	TAKE-OFF	WIDTH
18	HIRL (60m) HIALS PAPI (angle 3.0°)		10,385′ 3165m		197′ 60m
36	HIRL (60m) SALS PAPI-L (angle 3.0°)				

TAKE-OFF


	AIR CARRIER (JAA) LVP must be in Force All Rwys RCLM (Day only) or RL	AIR CARRIER (JAA) All Rwys RCLM (Day only) or RL	AIR CARRIER (FAR 121) All Rwys Adequate Vis Ref	
A	250m	400m	2 Eng	400m
B				
C			3 & 4 Eng	
D	300m			

CHANGES: Apron and Twys adjusted.

© JEPPESEN, 2000, 2022. ALL RIGHTS RESERVED.

RAYONG, THAILAND

U-TAPAO RAYONG PATTAYA INTL

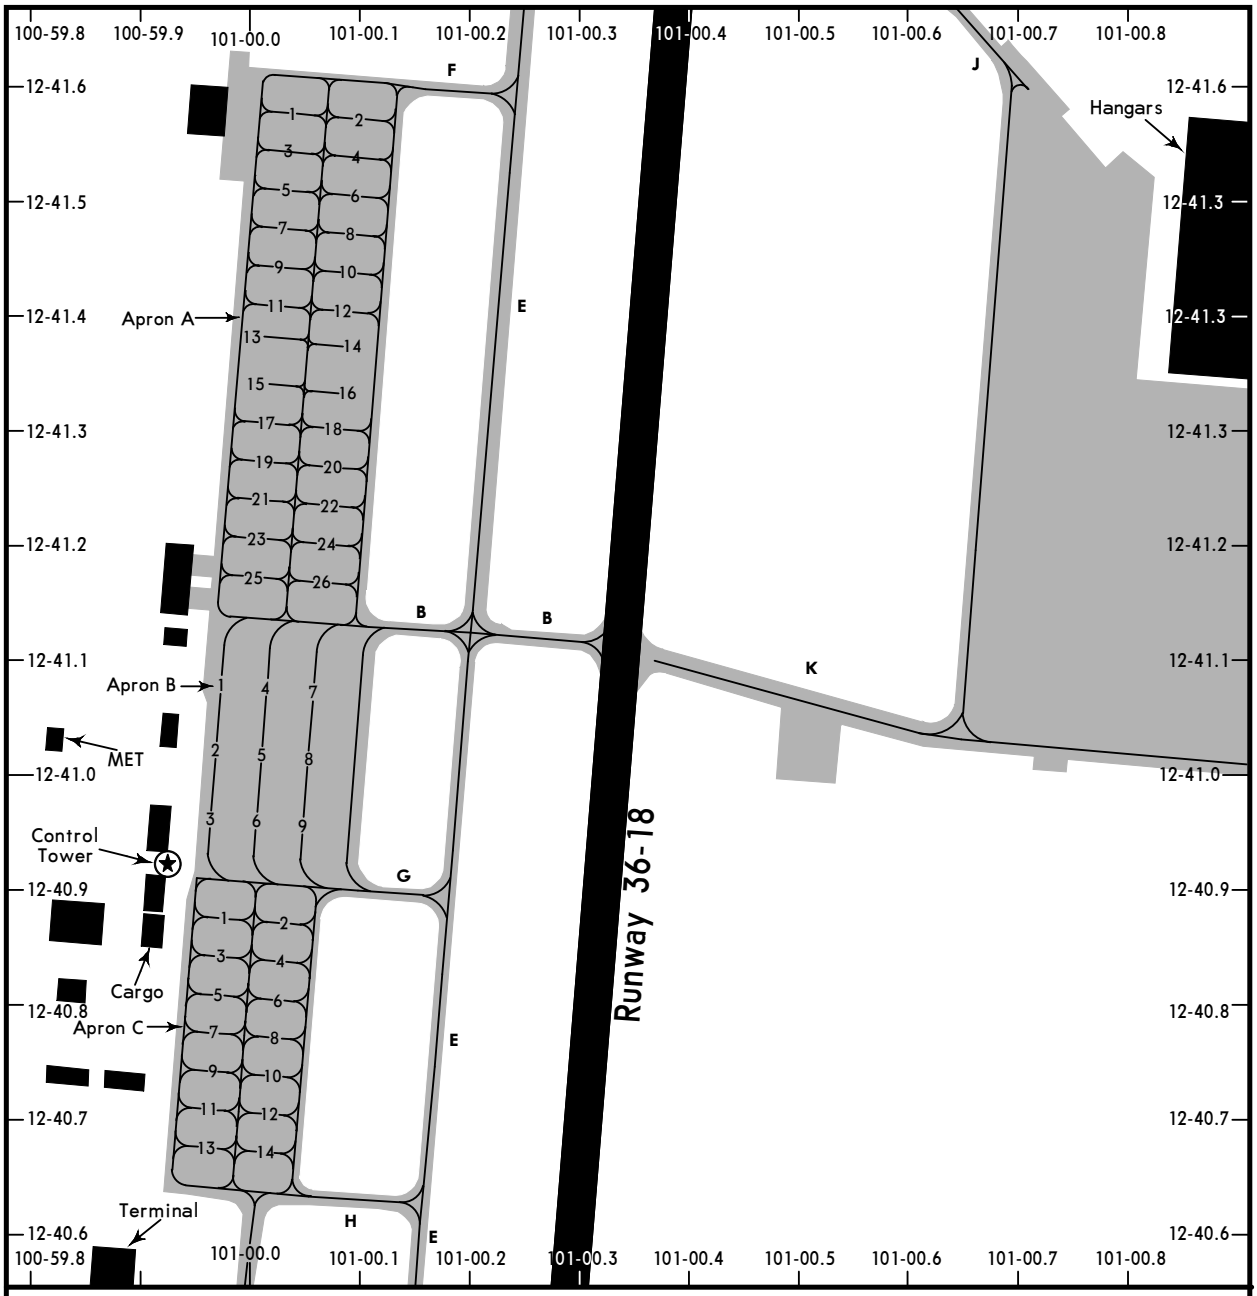

PARKING STAND COORDINATES

STAND No.	COORDINATES
APRON A	
1	N12 41.6 E101 00.0
2	N12 41.6 E101 00.1
3	N12 41.5 E101 00.0
4	N12 41.5 E101 00.1
5	N12 41.5 E101 00.0
6	N12 41.5 E101 00.1
7	N12 41.5 E101 00.0
8	N12 41.5 E101 00.1
9	N12 41.4 E101 00.0
10	N12 41.4 E101 00.1
11	N12 41.4 E101 00.0
12	N12 41.4 E101 00.1
13	N12 41.4 E101 00.0
14	N12 41.4 E101 00.1
15	N12 41.3 E101 00.0
16	N12 41.3 E101 00.1
17	N12 41.3 E101 00.0
18	N12 41.3 E101 00.1
19	N12 41.3 E101 00.0
20	N12 41.3 E101 00.1

STAND No.	COORDINATES
APRON A	
21	N12 41.2 E101 00.0
22	N12 41.2 E101 00.1
23	N12 41.2 E101 00.0
24	N12 41.2 E101 00.1
25	N12 41.2 E101 00.0
26	N12 41.2 E101 00.1
APRON B	
1	N12 41.1 E101 00.0
2	N12 41.0 E101 00.0
3	N12 40.9 E101 00.0
4	N12 41.1 E101 00.0
5	N12 41.0 E101 00.0
6	N12 40.9 E101 00.0
7	N12 41.1 E101 00.1
8	N12 41.0 E101 00.1
9	N12 40.9 E101 00.0
APRON C	
1, 2	N12 40.9 E101 00.0
3 thru 8	N12 40.8 E101 00.0
9 thru 14	N12 40.7 E101 00.0


CHANGES: Apron and Twys adjusted.

© JEPPESEN, 2000, 2022. ALL RIGHTS RESERVED.

Apt Elev	Trans alt: 11000
59	RNP 1 GNSS required
	No turn before DER.

BKK 1A RNAV DEPARTURE [BKK1A] (RWY 18)

SPEED: MAX 250 KT AT OR BELOW 10000 UNLESS OTHERWISE AUTHORIZED BY ATC.

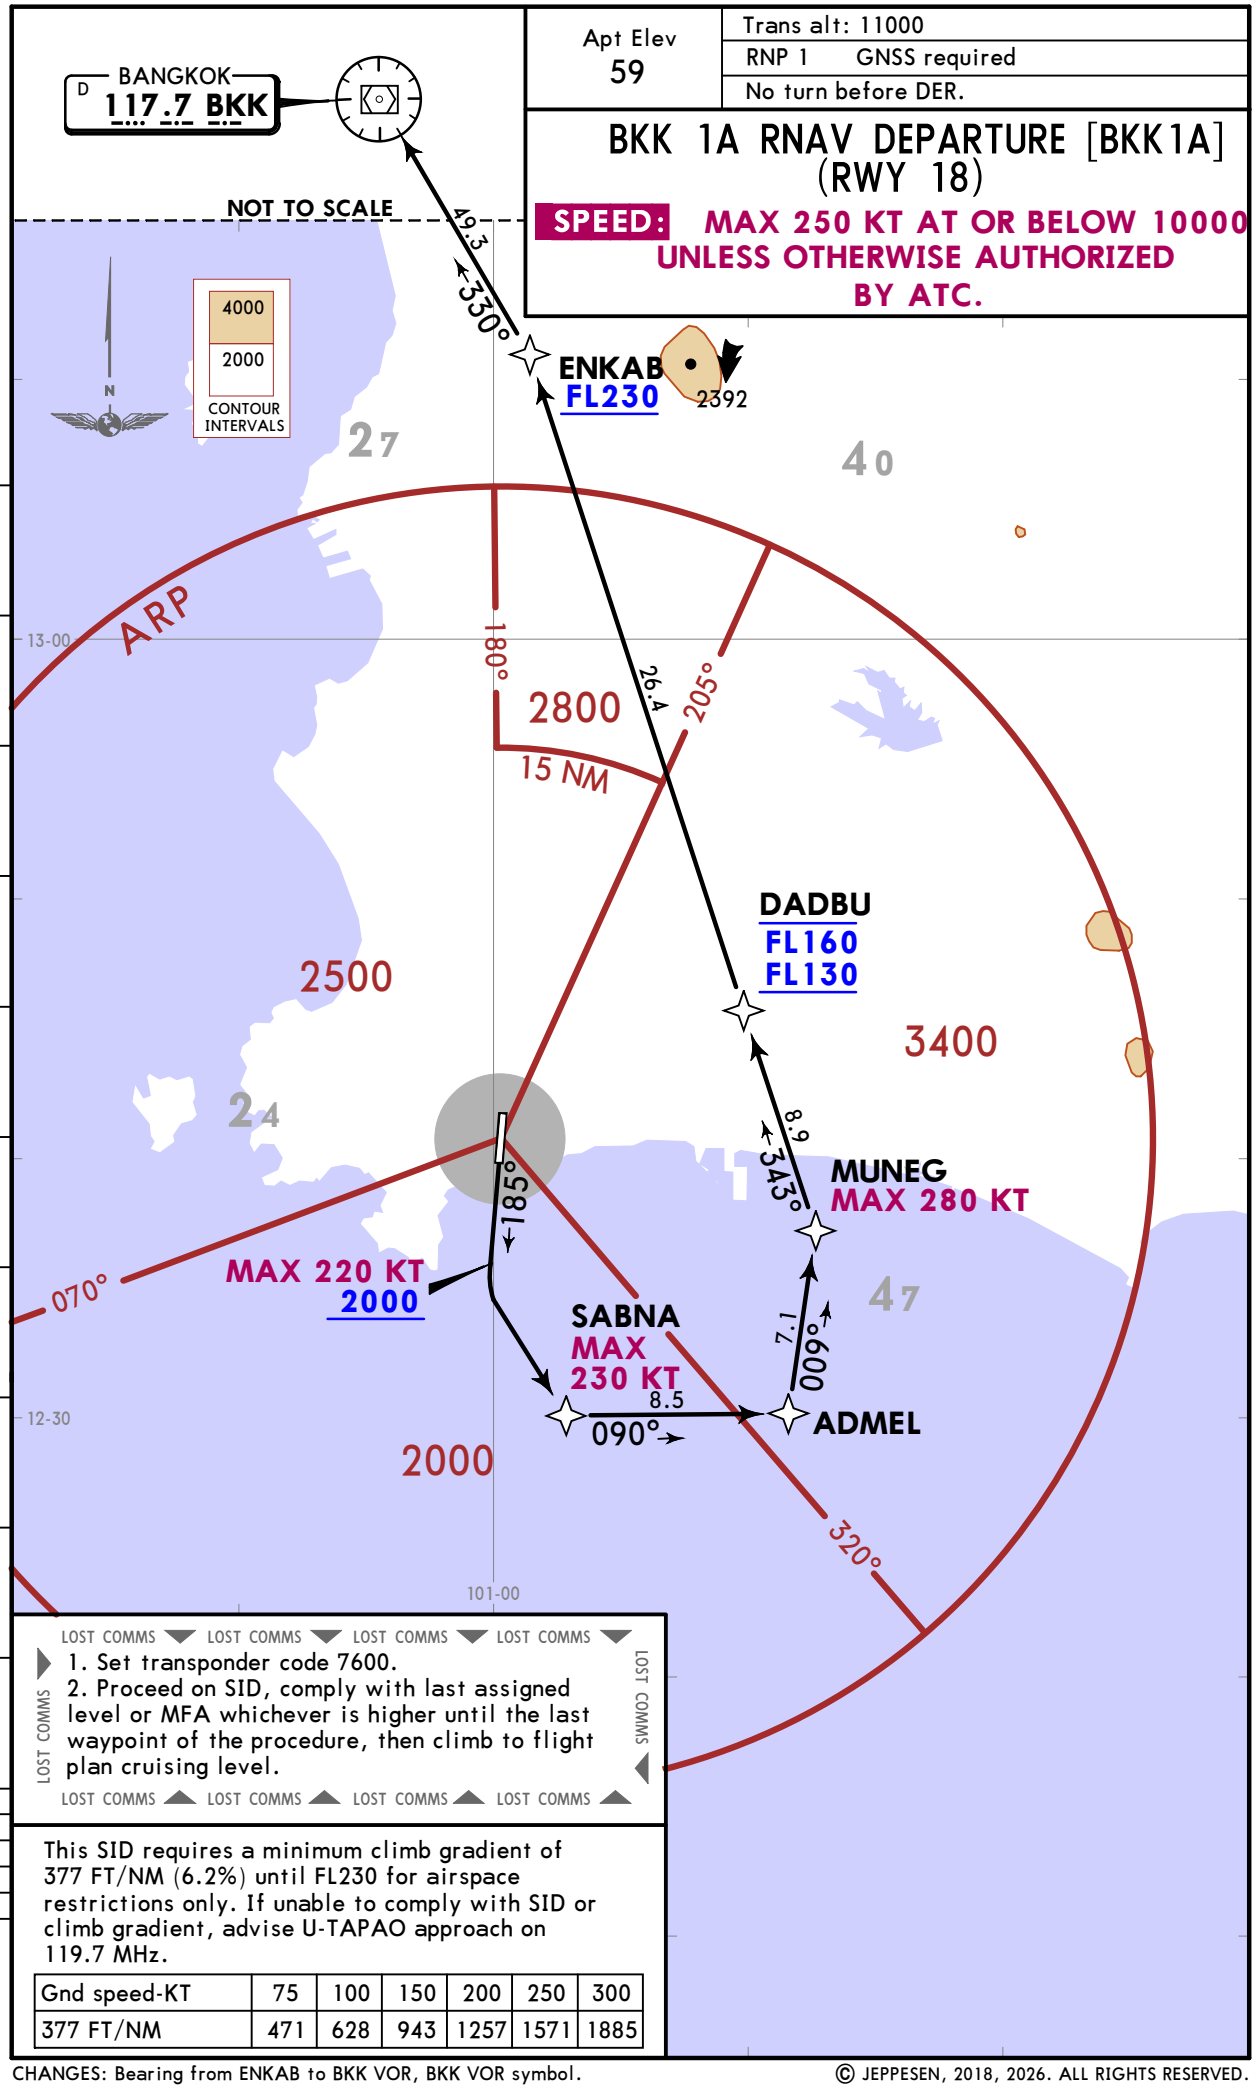

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

1. Set transponder code 7600.
2. Proceed on SID, comply with last assigned level or MFA whichever is higher until the last waypoint of the procedure, then climb to flight plan cruising level.


LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲

This SID requires a minimum climb gradient of 377 FT/NM (6.2%) until FL230 for airspace restrictions only. If unable to comply with SID or climb gradient, advise U-TAPAO approach on 119.7 MHz.

Gnd speed-KT	75	100	150	200	250	300
377 FT/NM	471	628	943	1257	1571	1885

CHANGES: Bearing from ENKAB to BKK VOR, BKK VOR symbol.

© JEPPESEN, 2018, 2026. ALL RIGHTS RESERVED.

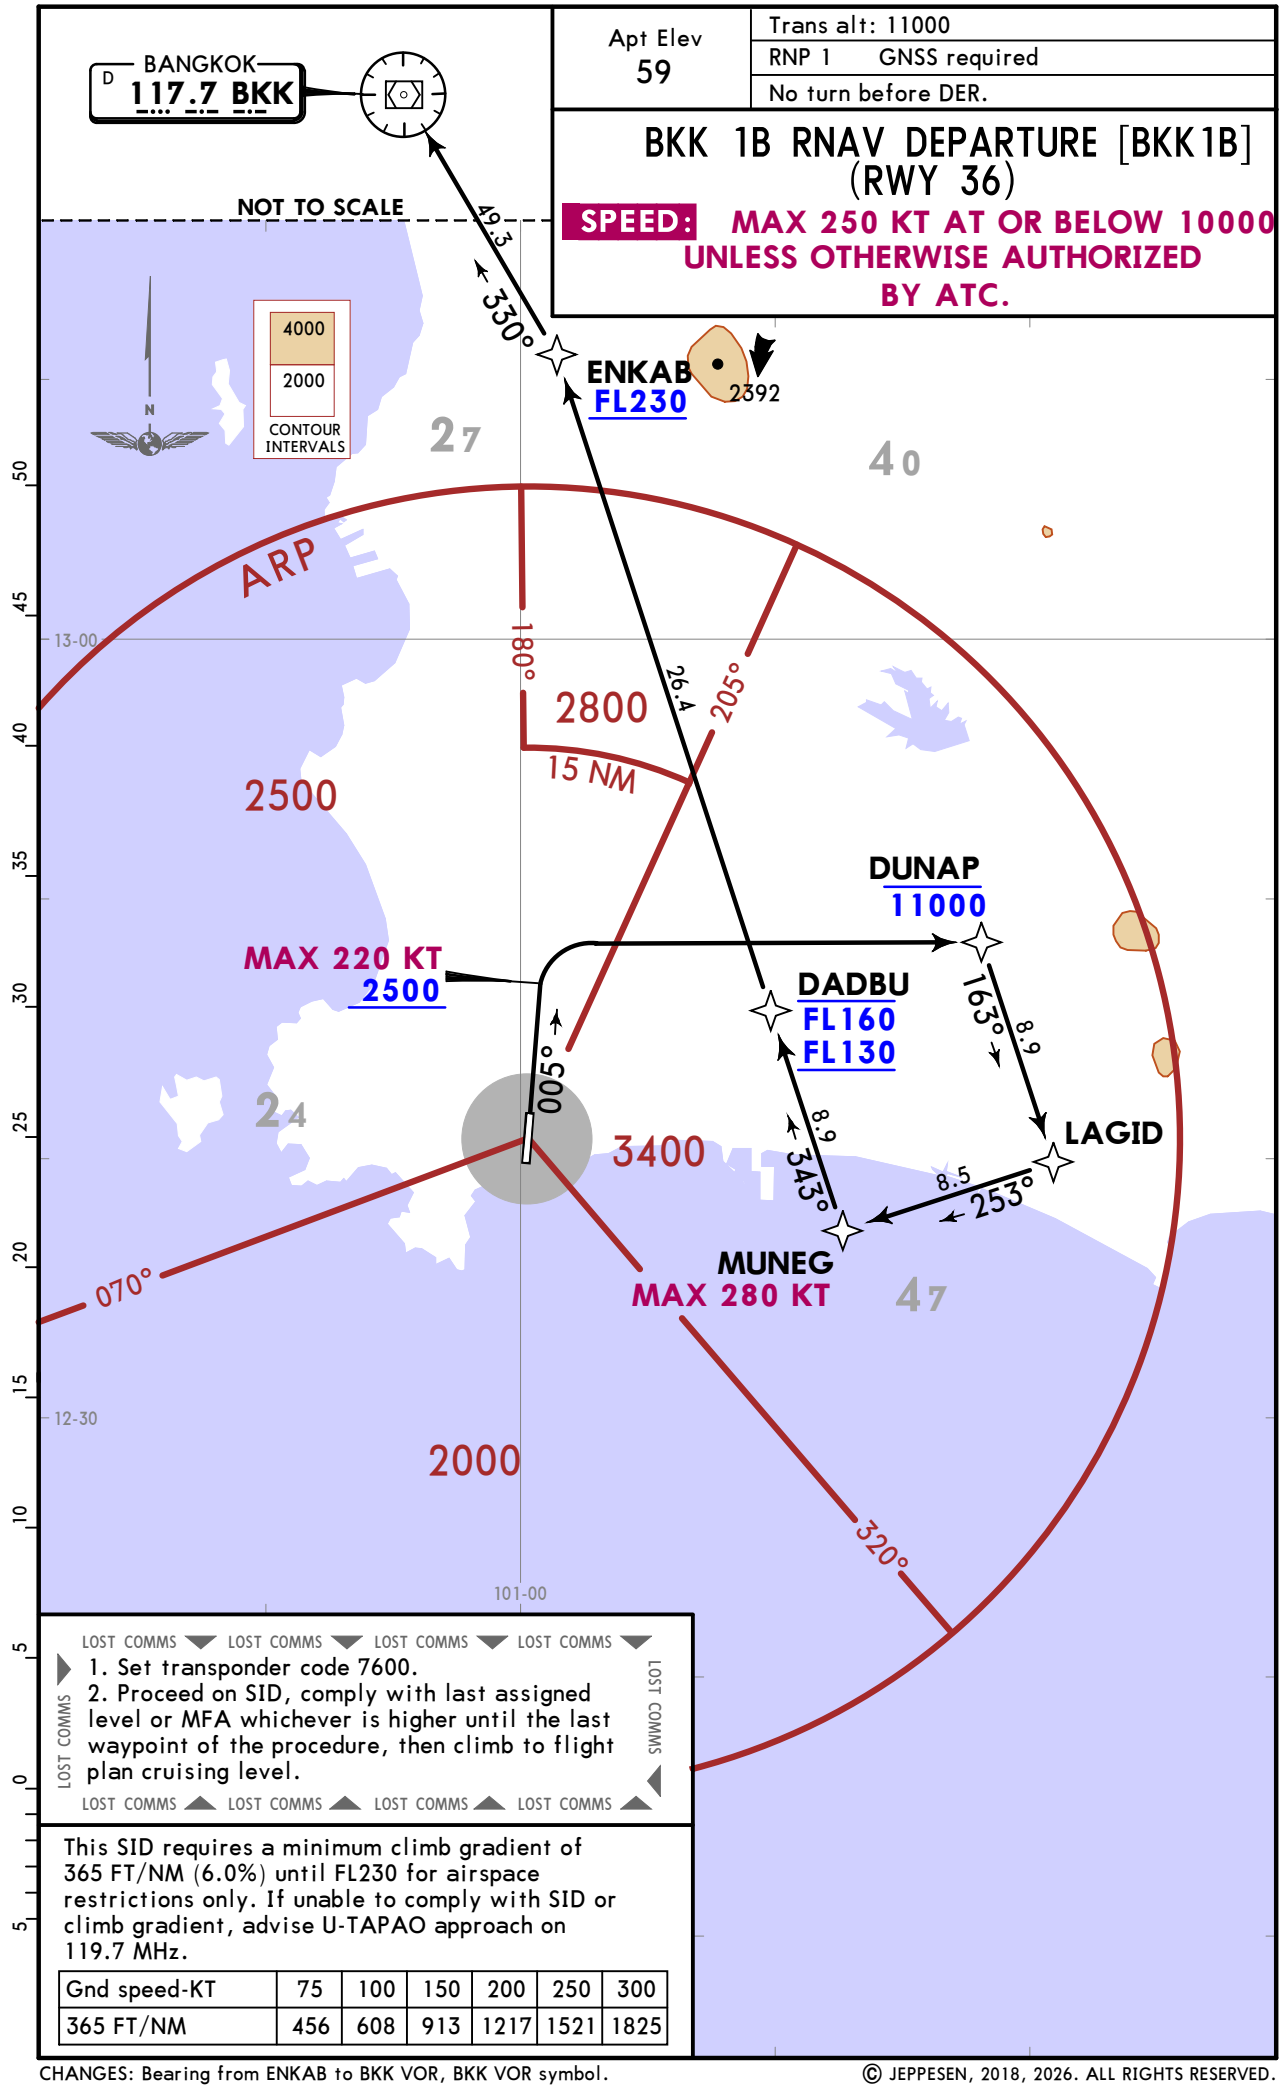

CHANGES: Bearing from ENKAB to BKK VOR, BKK VOR symbol.

© JEPPESEN, 2018, 2026. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN 11-2 27 MAR 26

RAYONG, THAILAND
ILS or LOC Y Rwy 18

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9

BRIEFING STRIP ™


LOC IBUT	Final Apch Crs	BU182	ILS DA(H)	Apt Elev 59′ Rwy 59′
111.9	185°	1700′(1641′)	300′(241′)	

MISSED APCH: Climb to intercept outbound BUT VOR R-183 to BUSNO at or above 1500′. After BUSNO turn LEFT to intercpet outbound BUT VOR R-070, then proceed to EKOBA at 4000′ or above and hold or as directed by ATC. No turn before MAP (for LOC only). MAX 200 KT until after turn.


Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000′

1. VOR, DME required. 2. CAUTION: Aircraft shall avoid entering VT(R)-11.

MSA BUT VOR
1 2800
2500 3400 2000

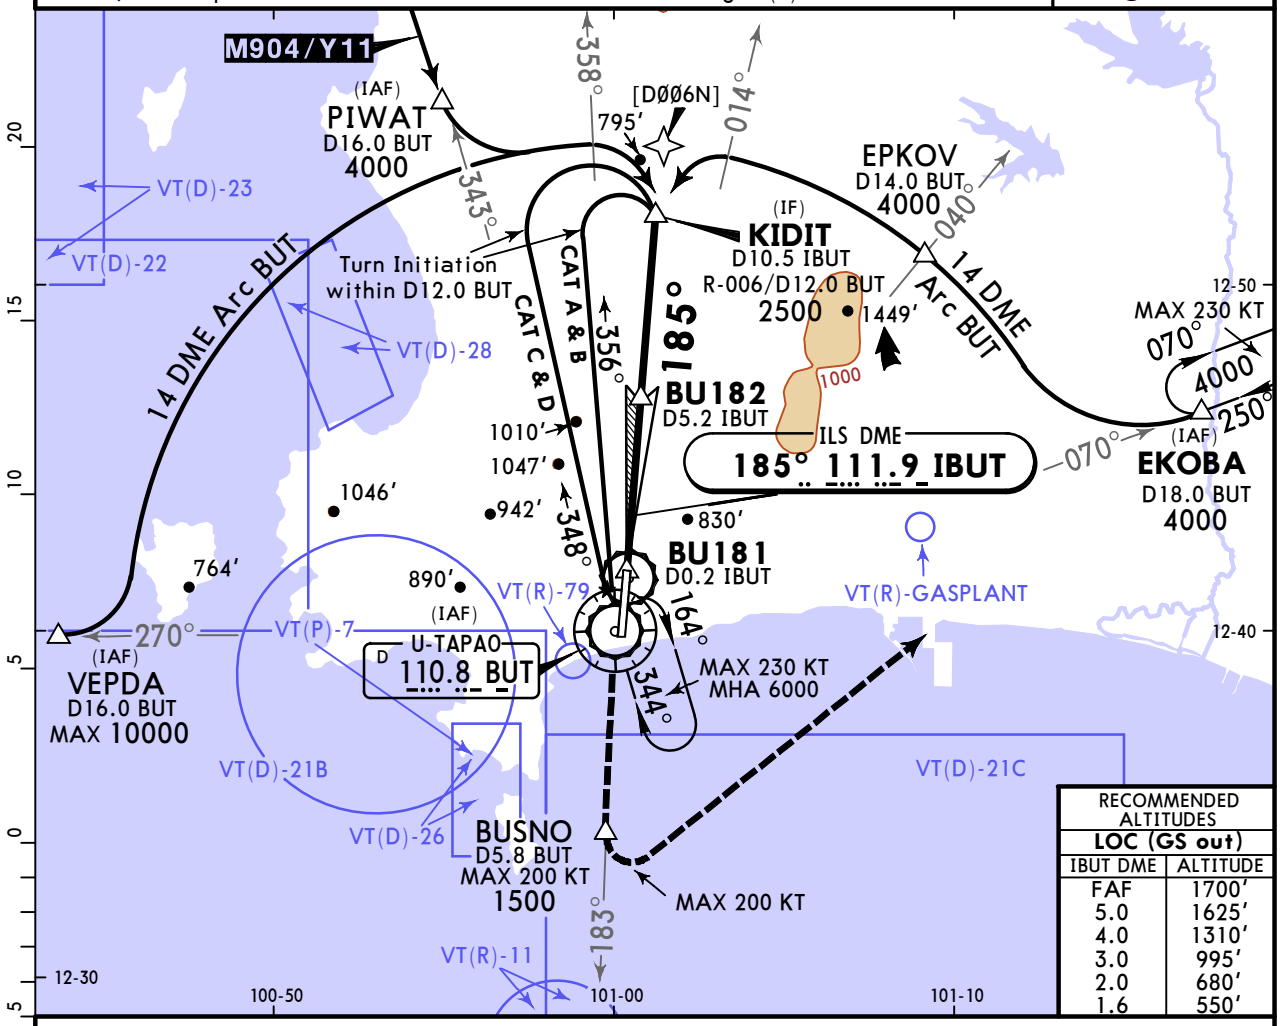

RECOMMENDED ALTITUDES	
LOC (GS out)	
IBUT DME	ALTITUDE
FAF	1700′
5.0	1625′
4.0	1310′
3.0	995′
2.0	680′
1.6	550′

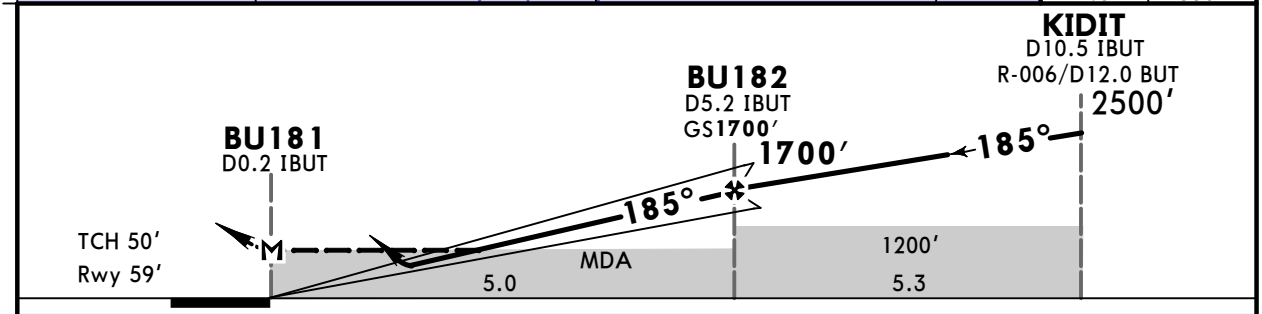

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at BU181							

HIALS PAPI PAPI

BUT 110.8 R-183 | BUSNO 1500′

PANS OPS

STRAIGHT-IN LANDING RWY 18

	ILS DA(H) 300′(241′)		LOC (GS out) MDA(H) 550′(491′)	
	FULL	ALS out		ALS out
A	1200m		1200m	1600m
B				
C			2000m	
D			2400m	

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200′(1141′) -2000m
135	1200′(1141′) -2400m
180	1450′(1391′) -4800m
205	

CHANGES: Radial to PIWAT, airspace VT(R)-11 added.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN 11-1 27 MAR 26

RAYONG, THAILAND
ILS or LOC Z Rwy 18

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9


BRIEFING STRIP™


LOC IBUT	Final Apch Crs	BU182 MANDATORY	ILS DA(H)	Apt Elev 59' Rwy 59'
111.9	185°	1700'(1641')	300'(241')	

MISSED APCH: Climb on track 185° to BUSNO at or above 1500'. After BUSNO turn LEFT direct to EKOBA at 4000' or above and hold, or as directed by ATC. No turn before MAP (for LOC only). MAX 200 KT until after turn.


Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000'

1. RNP1 required. 2. GNSS required. 3. DME required. 4.CAUTION: Aircraft shall avoid entering VT(R)-11.



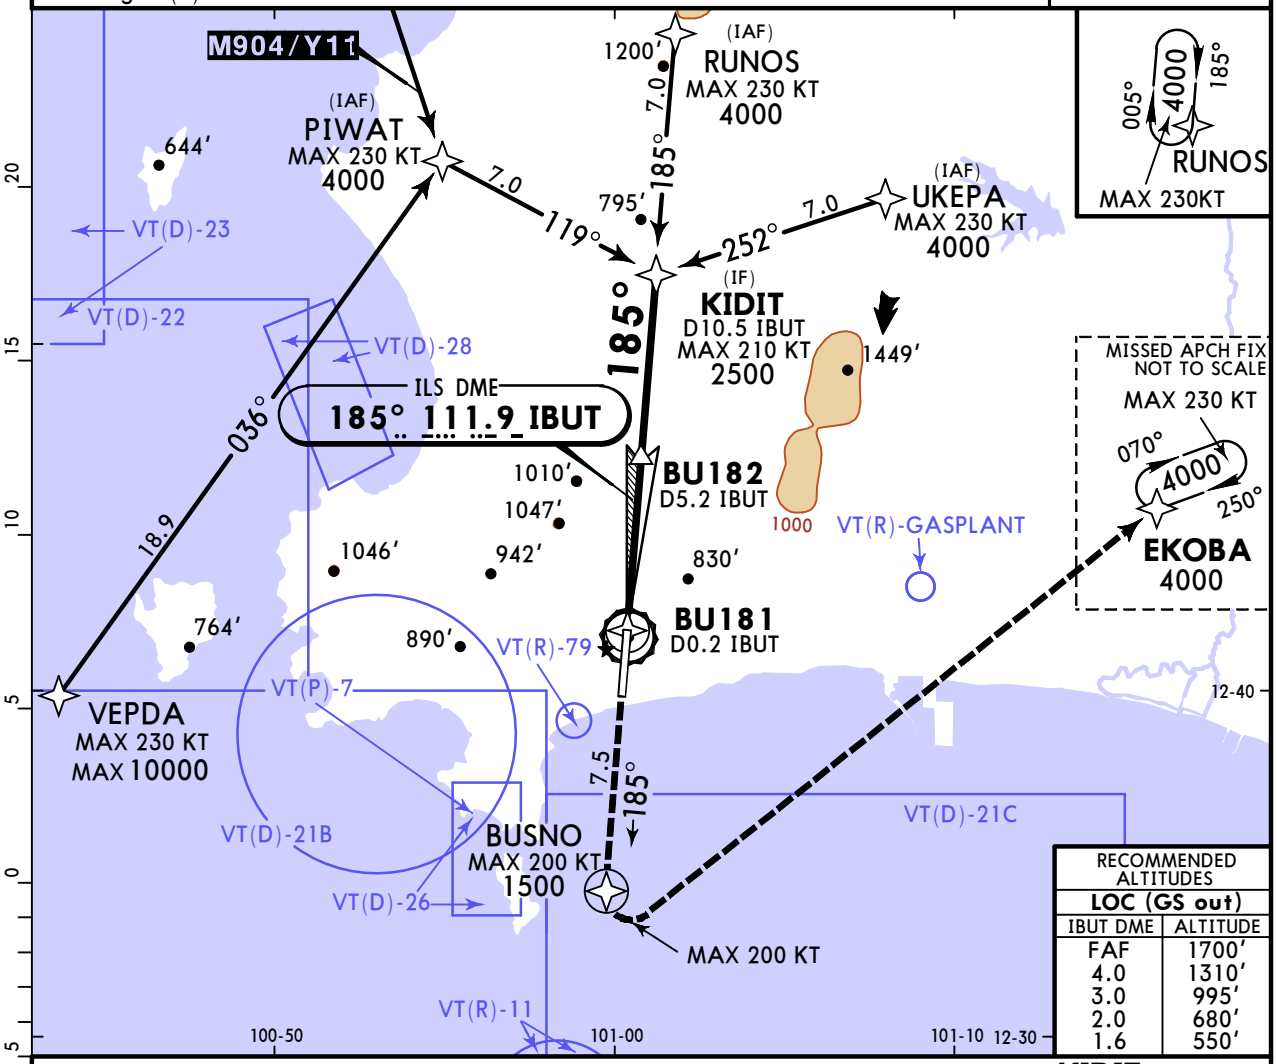

RECOMMENDED ALTITUDES	
LOC (GS out)	
IBUT DME	ALTITUDE
FAF	1700'
4.0	1310'
3.0	995'
2.0	680'
1.6	550'

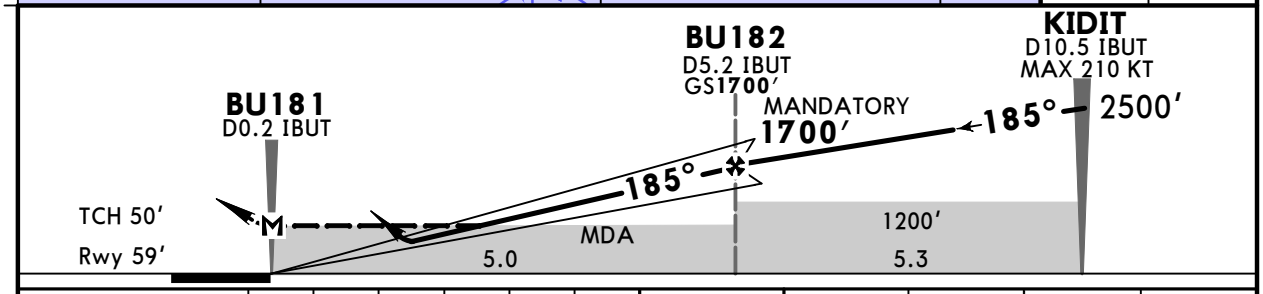

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849
MAP at BU181							

HIALS PAPI PAPI on 185°

BUSNO 1500'

PANS OPS

STRAIGHT-IN LANDING RWY18

	ILS DA(H) 300'(241') FULL	ILS DA(H) 300'(241') ALS out	LOC (GS out) MDA(H) 550'(491')	LOC (GS out) MDA(H) 550'(491') ALS out
A	1200m		1200m	1600m
B				
C			2000m	
D			2400m	

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200'(1141')-2000m
135	1200'(1141')-2400m
180	1450'(1391')-4800m
205	

CHANGES: Airspace VT(R)-11 added.

© JEPPESEN, 2022, 2026. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL


JEPPESEN 17 FEB 23 (16-1)

RAYONG, THAILAND
NDB Rwy 36

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9

NDB UP	Final Apch Crs	No FAF	MDA(H)	Apt Elev 59′
414	350°		790′ (766′)	Rwy 24′

MISSED APCH: Climb on track 350° to UP NDB then climb on bearing 350° to 1200′ then turn RIGHT climbing to UP NDB to 2500′ and hold.





MSA UP NDB

Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: FL130	Trans alt: 11000′

1. Final inbound track offset 15° from runway centerline. 2. CAUTION: Aircraft shall avoid entering VT(R)-11.

BRIEFING STRIP ™

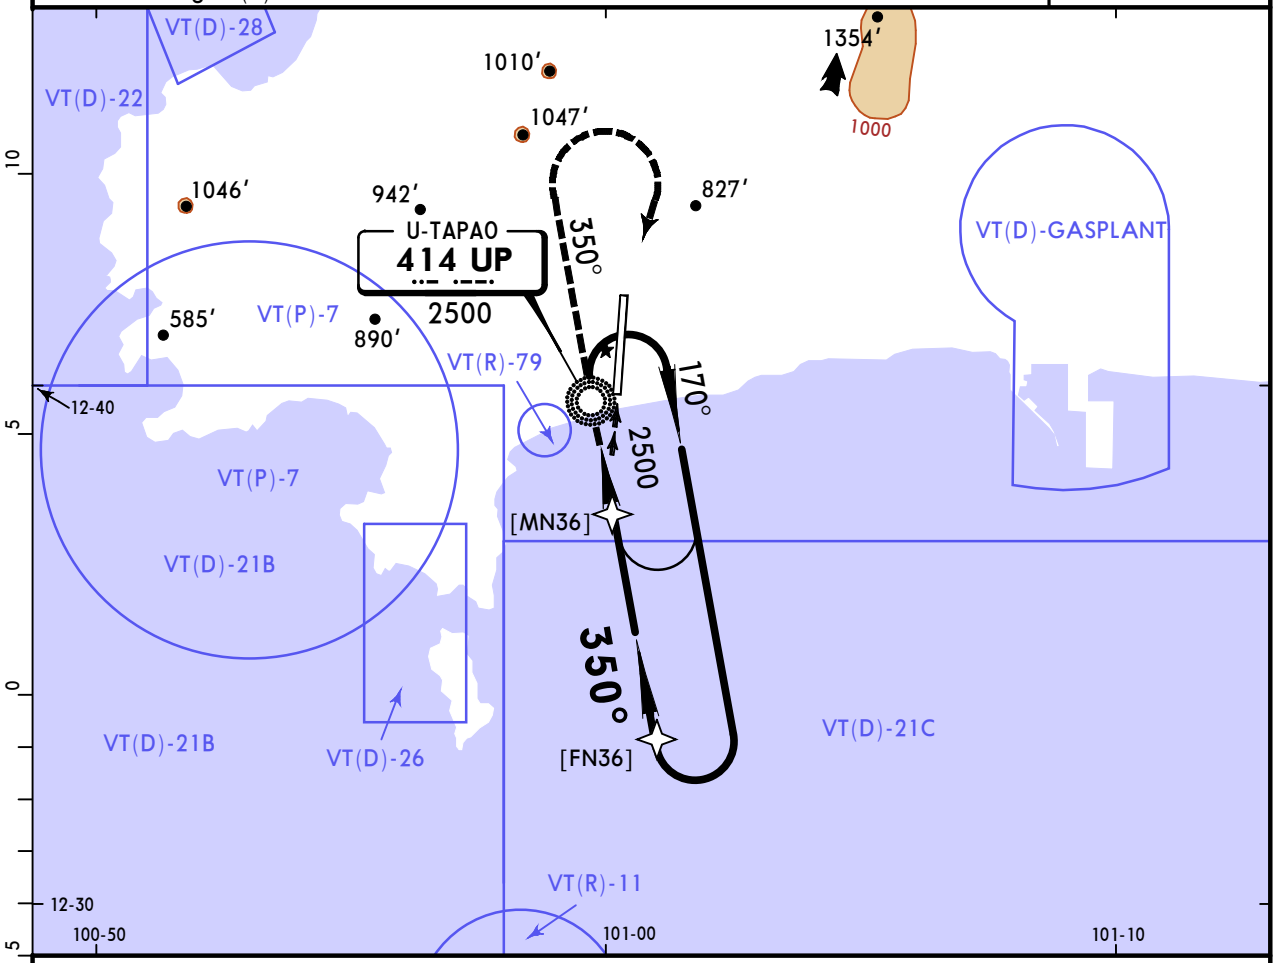

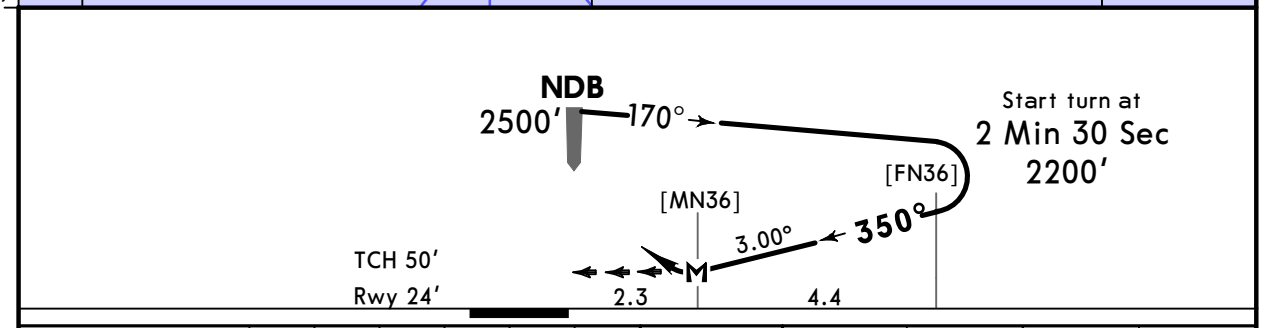

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at [MN36]						

PAPI SALS on 350° UP 414

PANS OPS

STRAIGHT-IN LANDING RWY 36

MDA(H) 790′ (766′)

	ALS out
A	3200m
B	
C	3600m
D	4000m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200′(1141′)-3200m
135	
180	1450′(1391′)-4800m
205	

CHANGES: Straight-in MDA(H), minimums.

© JEPPESEN, 2002, 2023. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN 10 JUN 22
12-1 Eff 16 Jun

RAYONG, THAILAND
RNP Rwy 18

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9

BRIEFING STRIP ™


RNAV	Final Apch Crs	BU182 MANDATORY	LNAV/VNAV DA(H)	Apt Elev 59′
	185°	1700′(1641′)	410′(351′)	Rwy 59′


MISSED APCH: Climb on track 185° to BUSNO at or above 1500′. After BUSNO turn LEFT direct to EKOBA at 4000′ or above and hold, or as directed by ATC. No turn before MAP. MAX 200 KT until after turn.

RNP Apch	Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: FL130	Trans alt: 11000′


1. CAUTION: Aircraft shall avoid entering VT(R)-11. 2. Baro-VNAV not authorized below 15°C.

MSA ARP
1 2800



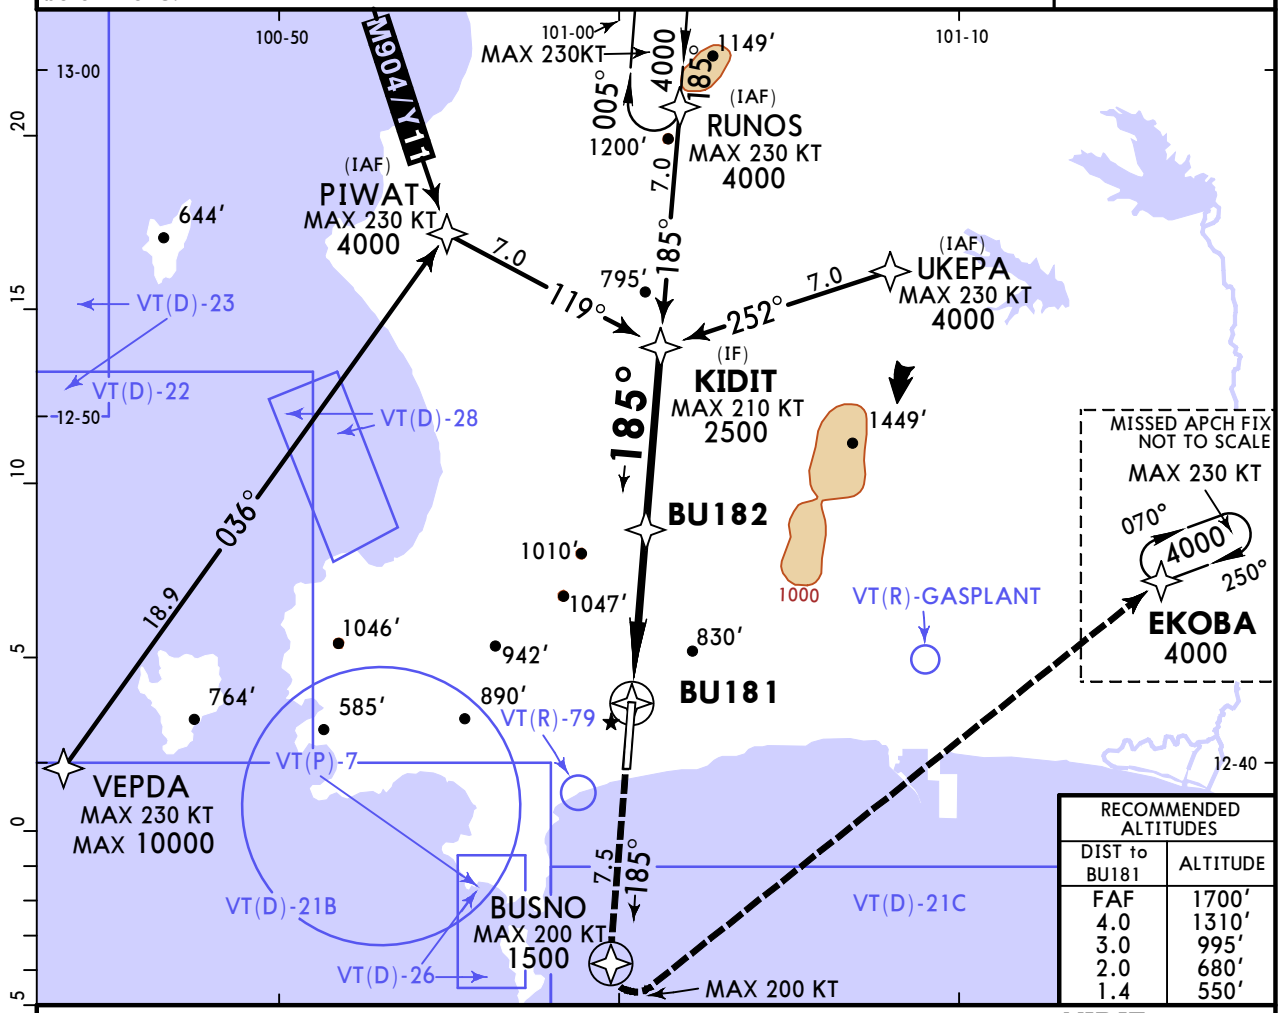

RECOMMENDED ALTITUDES	
DIST to BU181	ALTITUDE
FAF	1700′
4.0	1310′
3.0	995′
2.0	680′
1.4	550′

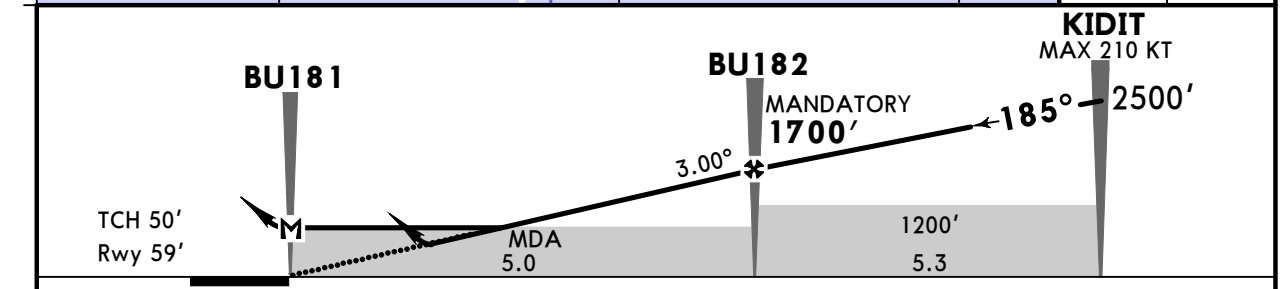

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at BU181							

HIALS
PAPI PAPI
on 185°
BUSNO
1500′

PANS OPS

STRAIGHT-IN LANDING RWY18

	LNAV/VNAV DA(H) 410′(351′)		LNAV MDA(H) 550′(491′)	
		ALS out		ALS out
A	1230m	1800m	1200m	1600m
B				
C			2000m	
D			2400m	

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200′(1141′)-2000m
135	1200′(1141′)-2400m
180	1450′(1391′) -4800m
205	

CHANGES: Procedure revised.

© JEPPESEN, 2016, 2022. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN

12-2 | 10 JUN 22 | Eff 16 Jun

RAYONG, THAILAND
RNP Rwy 36


ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9

BRIEFING STRIP™


RNAV	Final Apch Crs	UTPSF MANDATORY	LNAV/VNAV DA(H)	Apt Elev 59′
	005°	1100′(1076′)	480′(456′)	Rwy 24′

MISSED APCH: Climb on track 005° to 2500′, then turn RIGHT direct to COBAR at 4000′ and hold or as directed by ATC. No turn before MAP.


Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: FL130	Trans alt: 11000′
RNP Apch	Baro-VNAV not authorized below 15°C.		



MSA ARP

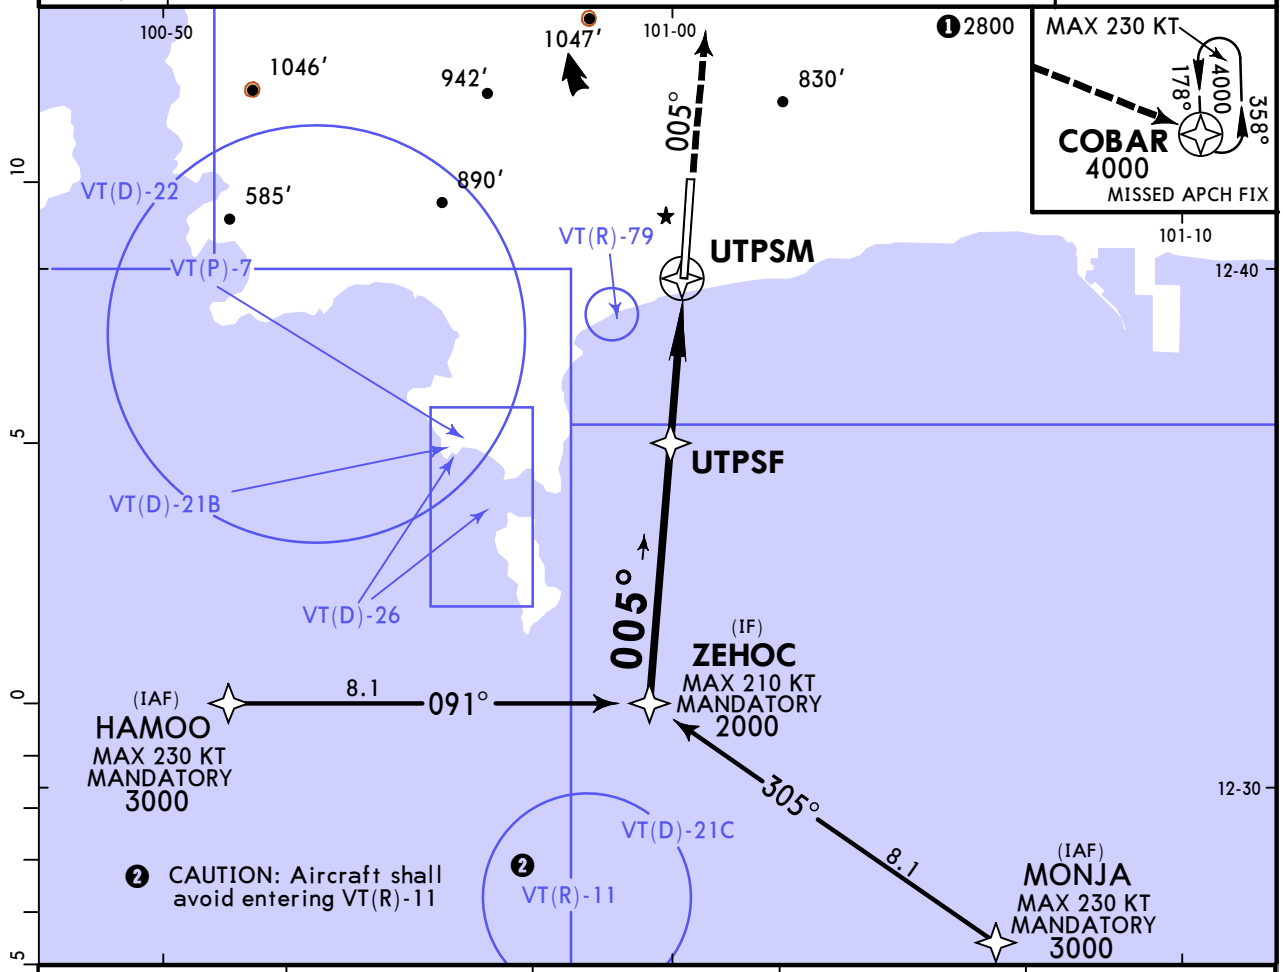

DIST to UTPSM	FAF	3.0	2.0	1.5
ALTITUDE	1100′	1020′	705′	560′

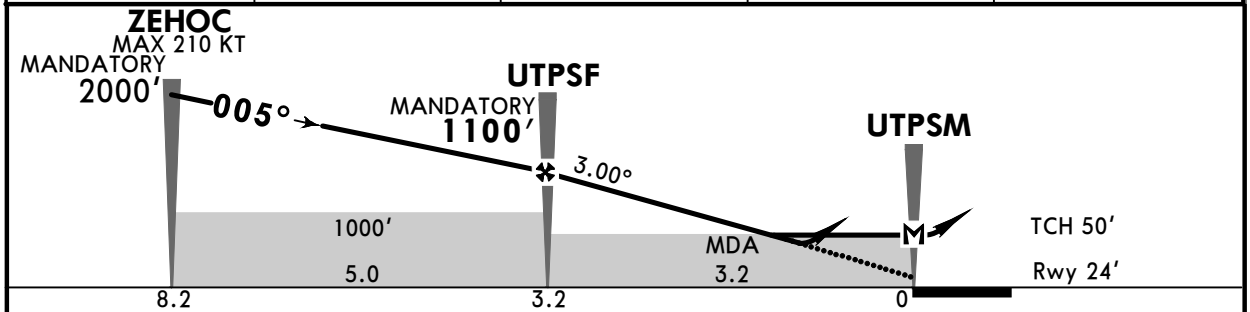

Gnd speed-Kts		70	90	100	120	140	160
Glide Path Angle	3.00°	372	478	531	637	743	849
MAP at UTPSM							

SALS | PAPI | 005° | 2500′ | RT | COBAR

PANS OPS

STRAIGHT-IN LANDING RWY 36

	LNAV/VNAV DA(H) 480′(456′)		LNAV MDA(H) 640′(616′)	
		ALS out		ALS out
A	2400m		1200m	1600m
B				
C			2800m	
D			3200m	

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200′(1141′) -2400m
135	
180	1450′(1391′) -4800m
205	

CHANGES: MANDATORY altitudes.

© JEPPESEN, 2016, 2022. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN 27 MAR 26 (13-1)

RAYONG, THAILAND
VOR Rwy 18

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9


VOR BUT	Final Apch Crs	UTP18	MDA(H)	Apt Elev 59′
110.8	188°	1700′(1641′)	960′(901′)	Rwy 59′

MISSED APCH: No turn before MAP. Climb to intercept outbound on BUT VOR R-182 to SAMIT. After SAMIT and passing 1500′, turn LEFT to intercept outbound BUT VOR R-090, then proceed to IFONE and hold or as directed by ATC. Speed restricted to MAX 200 KT until after turn.


Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000′

1. DME required. 2. CAUTION: Aircraft shall avoid entering VT(R)-11.

MSA BUT VOR
1 2800

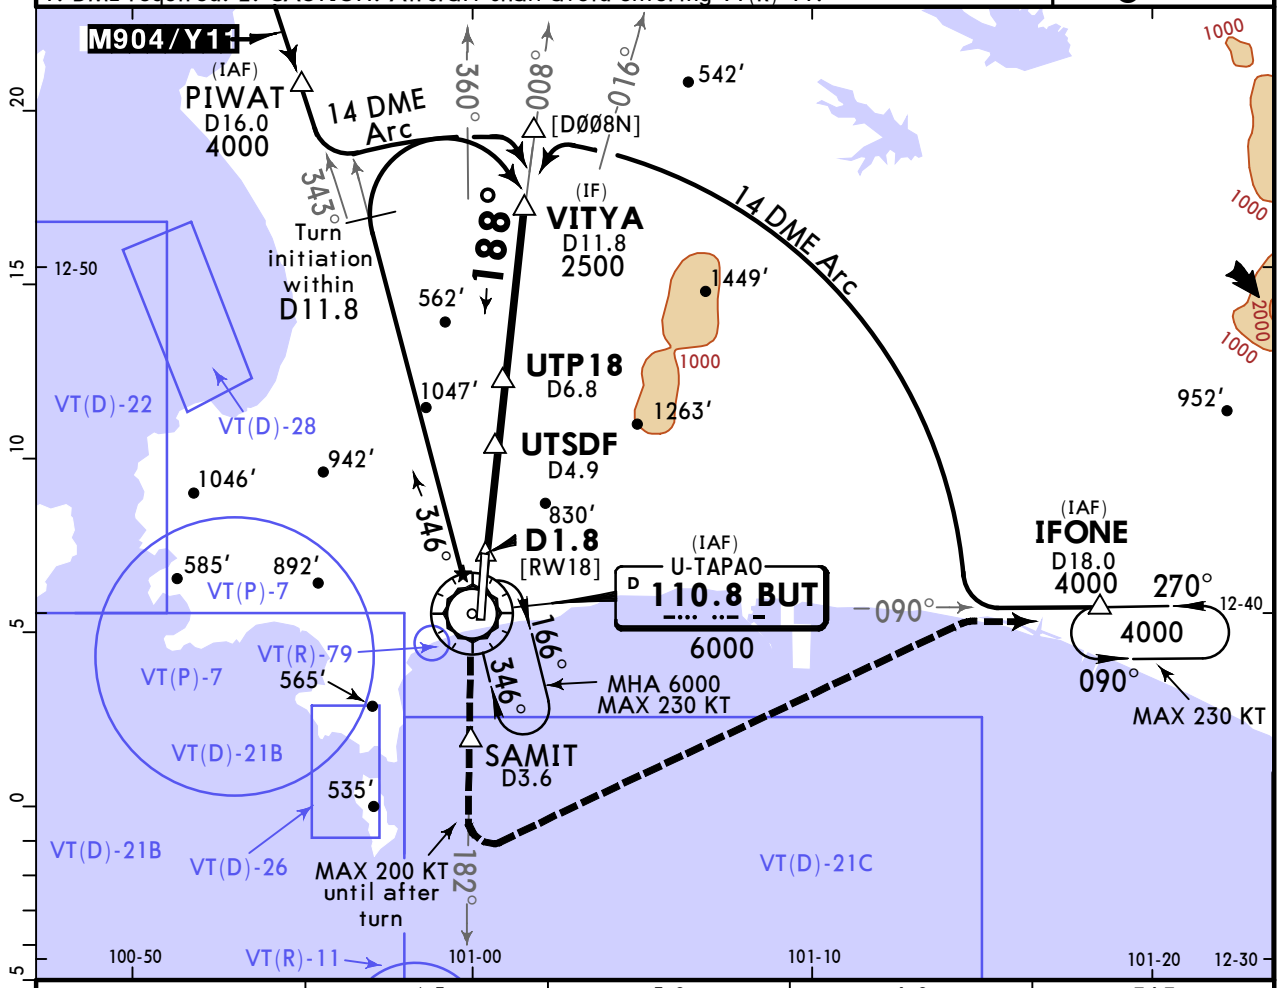

BUT DME	4.5	5.0	6.0	FAF
ALTITUDE	960′	1120′	1435′	1700′

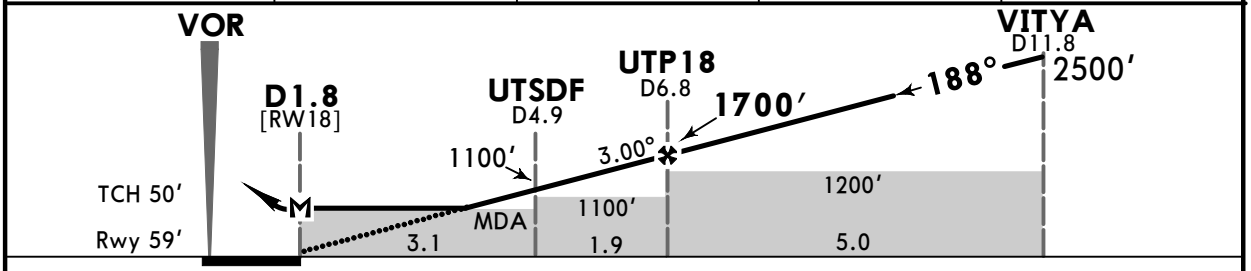

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D1.8						

HIALS
PAPI PAPI

on BUT 110.8 R-182

SAMIT

STRAIGHT-IN LANDING RWY 18

MDA(H) 960′ (901′)

	ALS out
A	2000m
B	2000m
C	4400m
D	4800m

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	1200′(1141′)-2000m
135	1200′(1141′)-2400m
180	1450′(1391′)-4800m
205	

PANS OPS

CHANGES: Radial to PIWAT.

© JEPPESEN, 2000, 2026. ALL RIGHTS RESERVED.

VTBU/UTP
U-TAPAO RAYONG PATTAYA INTL

JEPPESEN 27 MAR 26 (13-2)

RAYONG, THAILAND
VOR Rwy 36

ATIS	U-TAPAO Approach (R)		U-TAPAO Tower	Ground
127.2	119.7	134.5	118.3	121.9


BRIEFING STRIP ™

VOR BUT	Final Apch Crs	UTP36	MDA(H)	Apt Elev 59′
110.8	359°	1100′ (1076′)	460′ (436′)	Rwy 24′


MISSED APCH: No turn before MAP. Climb to COBAR at 4000′ via 15.3 DME Arc and hold or as directed by ATC.
Reach an altitude of 2500′ before starting on the Arc.

Alt Set: hPa | Rwy Elev: 2 hPa | Trans level: FL130 | Trans alt: 11000′


1. DME required. 2. CAUTION: Aircraft shall avoid entering VT(R)-11.



MSA BUT VOR

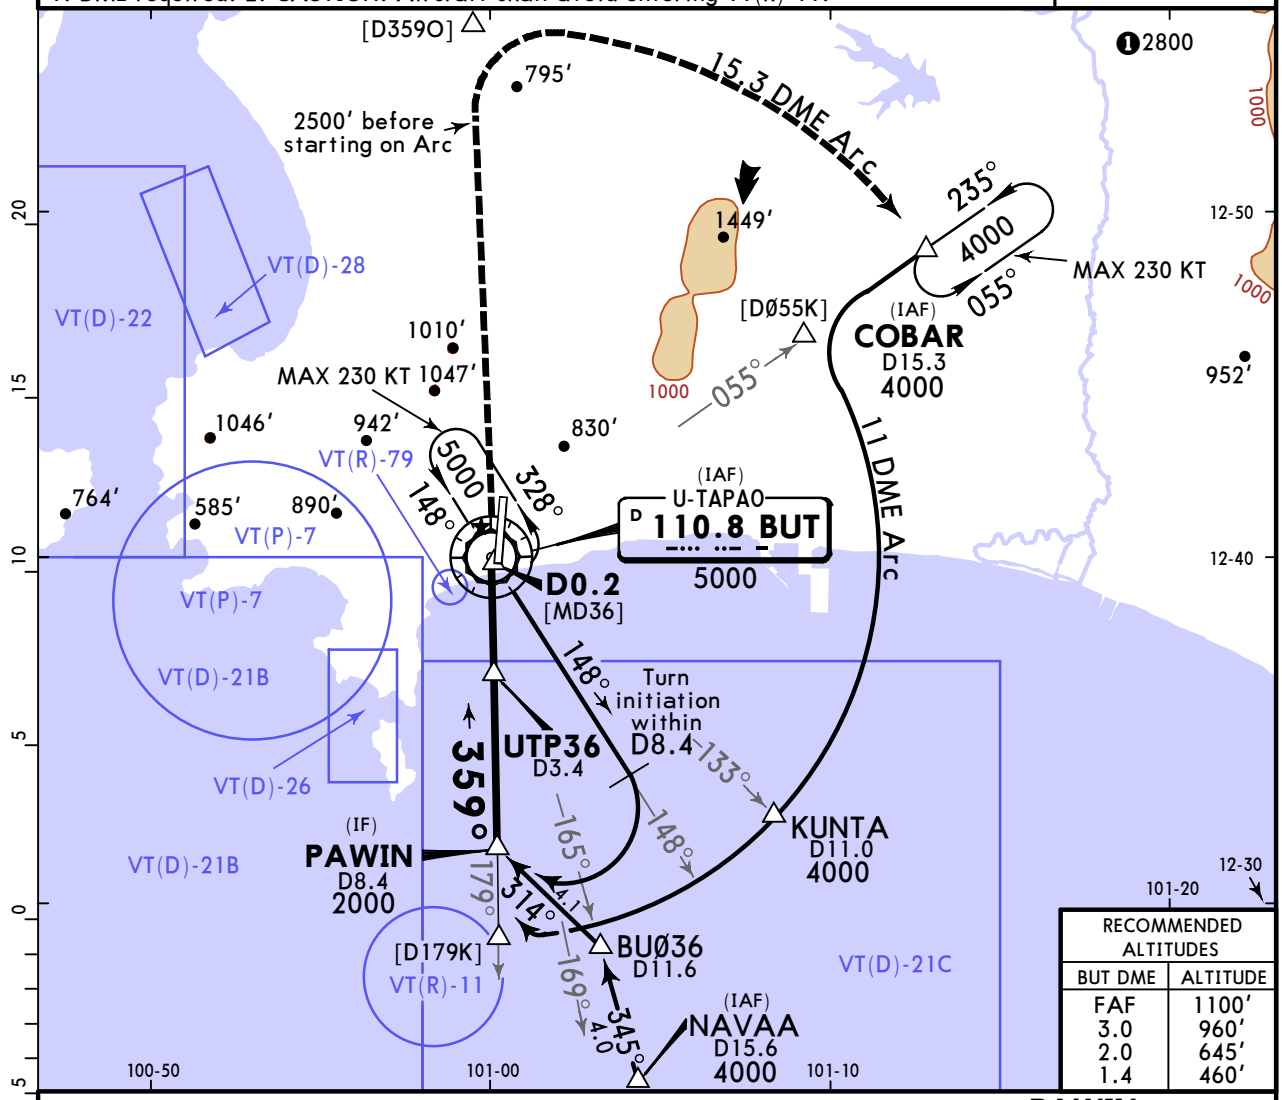

RECOMMENDED ALTITUDES	
BUT DME	ALTITUDE
FAF	1100′
3.0	960′
2.0	645′
1.4	460′

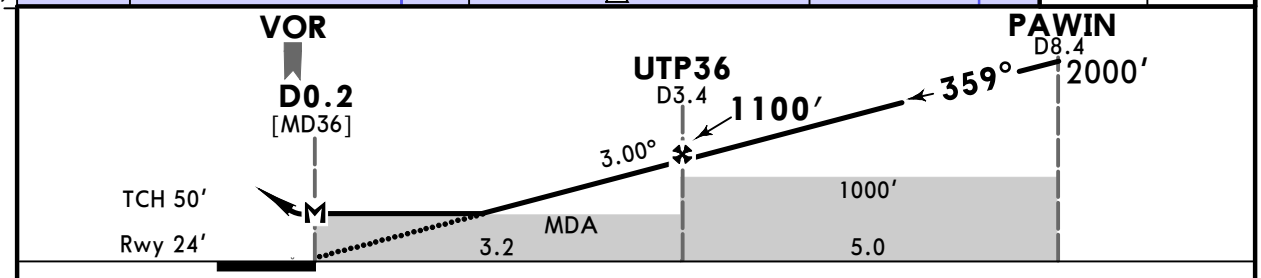

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D0.2						

SALS PAPI 4000′ COBAR

PANS OPS

STRAIGHT-IN LANDING RWY 36		CIRCLE-TO-LAND	
MDA(H) 460′ (436′)			
	ALS out	Max Kts	MDA(H)
A	1200m	100	1200′ (1141′) -2000m
B		135	1200′ (1141′) -2400m
C	2000m	180	1450′ (1391′) -4800m
D	2400m	205	

CHANGES: None.

© JEPPESEN, 2000, 2023. ALL RIGHTS RESERVED.