
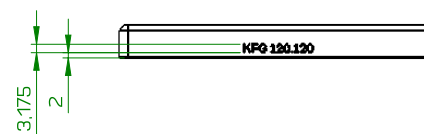
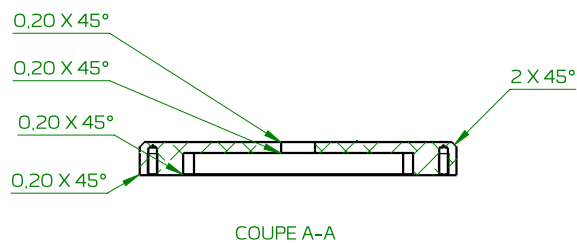
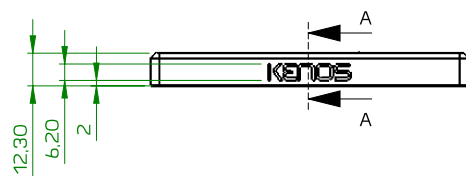


Keep threads without powder coating

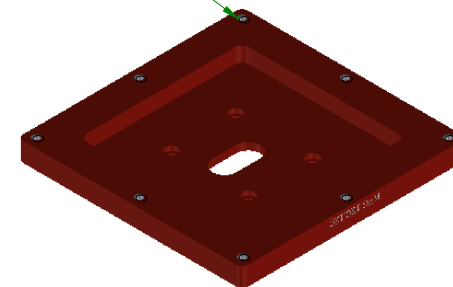

Fabrication requirements:

- Material: aluminum 6061
- Fillet without indication: R0.8mm
- Chamfer without indication: R0.25mm at 45°
- Default rugosity: Ra 3.2
- Default tolerances: IT12 or according to the standard GB/T1804-M and GB/T1184-K
- Break all sharp edges
- Powder coating in red RAL 3020, nothing on the threads
- Laser engraved logo and reference (natural aluminium colour)
- Stock parts to make sure that they don't directly touch each others

28/06/2022	B	Change to oblong hole in the middle	PB
Date	Rev.	Description de la révision	Dess.
Designation: KFG_120x120_body_red_Part layout			
N° Affaire: 2022_KFG_120x120		Fichier: KFG-120x120_body_red	
Matiere: Alliage 6061	Echelle: 1:2	Client:	
Format: A3	Tolérance générales: h13, H13, j13		