


GALVANIC TREATMENT : Fe/NiCr8

- Passivation type-temp.: low thickness 25C°
- Producer: Coventya



indicare il n° di impronta
indicate mark number

NOTE:
THIS COMPONENTS MUST BE PACKED WITH
NOTCH SIDE IN SAME TOWARDS

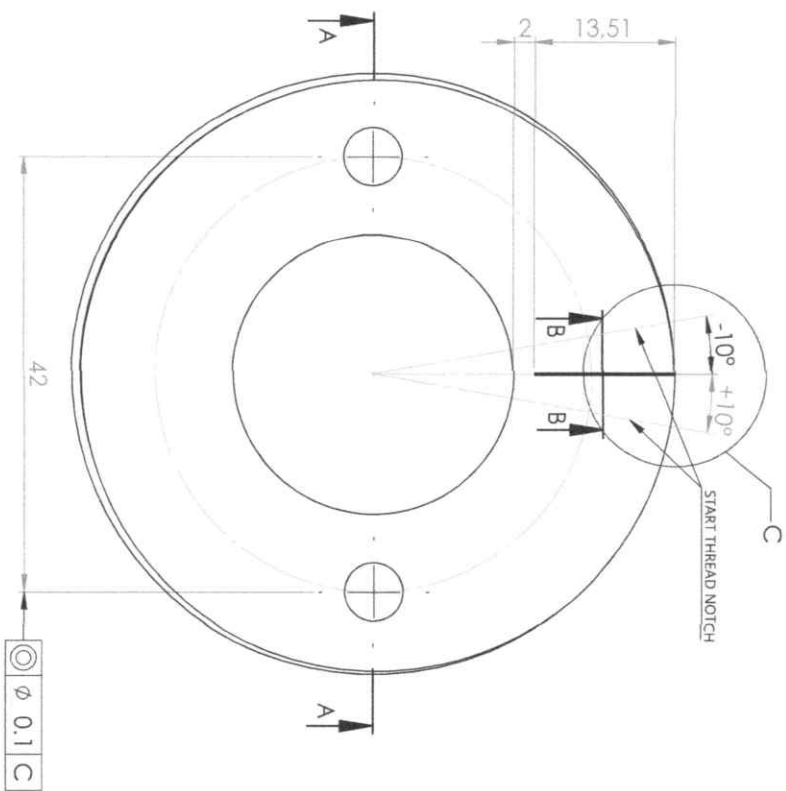

MARKING FOR TOP SIDE (ACCORDING TO PUNCHING DIRECTION)

2		Changed treatment	A41720	SOCIO2019	L. Beldito	AGE
1		Add start thread notch	A41239	08CQ2019	L. Beldito	AGE
0		PRIMA EMISSIONE		1701/2018	A. Gretti	AGE
N.			Mod. Tec.	Data	Firma	Verifica
DATA	DISEGNATO	VERIFICATO	RAGGIUNTO QUALITA'	TOLLERANZE	EN 22768-1 EN 22768-2 (ISO 2768-mK) ISO 8015	RILEGOSTA' 
28/06/2017			RAGGIUNTO QUALITA'	0.2mm	0.5x45°	
MATERIALE						
Acciaio En 10111 - DD11 (1.0332)						
DESCRIZIONE						
GHIERA FILETTATA SJ T METALLICA M58 x1.5						
VOLUME (cm³)	PESO (g)	SCALA	CODICE	FOGLIO		
7,36	58,18	UNI-A3	2-1	3323500B	1/1	