General tolerances: Finished: Hole H14 - Shaft h14 - Linear dimensions Js14

General tolerances: Raw: Hole H16 - Shaft h16 - Linear dimensions Js16

Angular dimension ±1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.

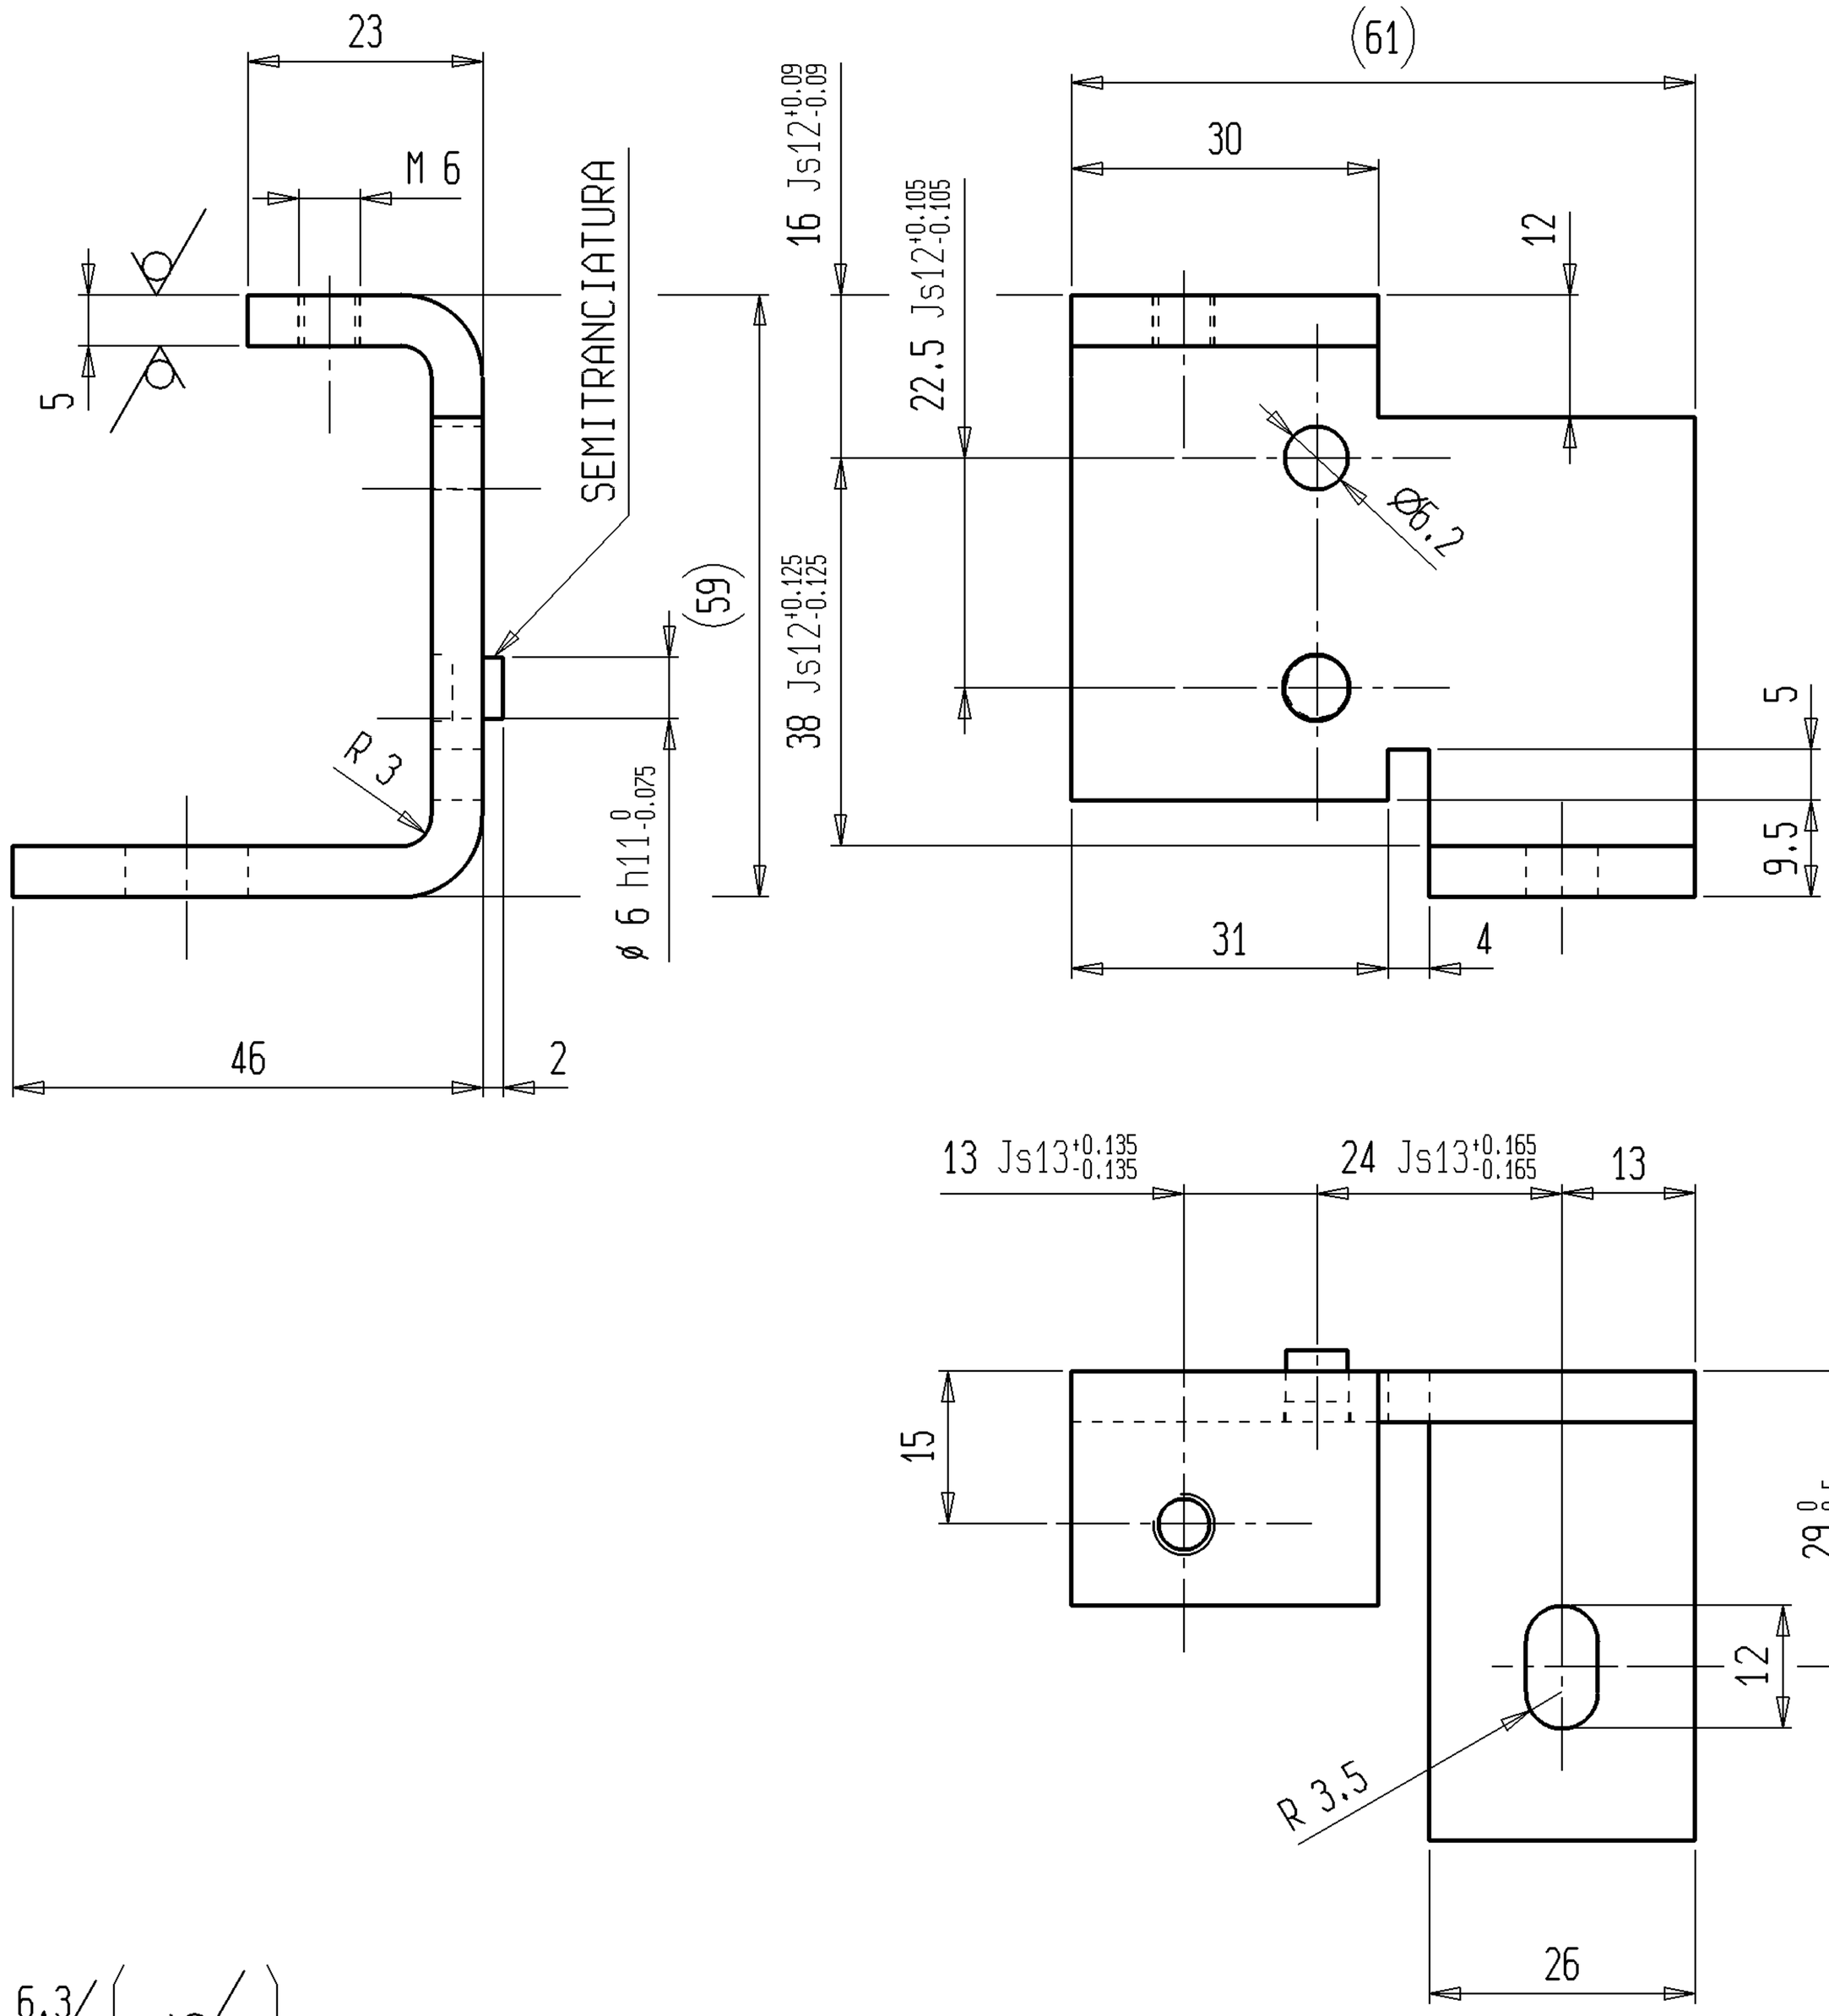

6.3 ( ) BAVA MAX.0,04 mm./ Maximum burr 0.04 mm

MID	Modification details	IRP	Rif	Draw.	Date	App.
018201	NEW EDITION	0				

Modifications referred to the previous release:

Material	: Fe 360 D UNI 7070	Code	: 4032_6036_64
Supply state	: LAMINATA A CALDO-DECAPATA	Dimensions	: 5x1250x2500
Thermic treat.	:	Hardness	:
Surface treat.	: Fe/Zn 8 c 2C-UNI ISO 2081	Substitute	: 16820_5463_0_0

DENOMINATION: REGG.RICERCA E CAMBIOSP. ANT. LATO DX

SPINNING SAVIO ITEMA	Draw.: ZANCAI_D	Date: 11/12/2008	16820_5463_1_0
	Con. : ZANCAI_D	Sheet N°: 1/1	
	App. : MALFANTE	Scale: 1:1	BRACKET

Mod. EL/02 Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.