




SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA


Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.

Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico


	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100



Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

General tolerance - Tolleranza generale: UNI EN 22768/1 - M									
Length and Diam. Lungh. e Diametri	0.00	6.00	30.0	120	315	1000	2000	4000	± 3.0
	6.00	30.0	120	315	1000	2000	4000		
Tolerance Tolleranza	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2.0	± 3.0	

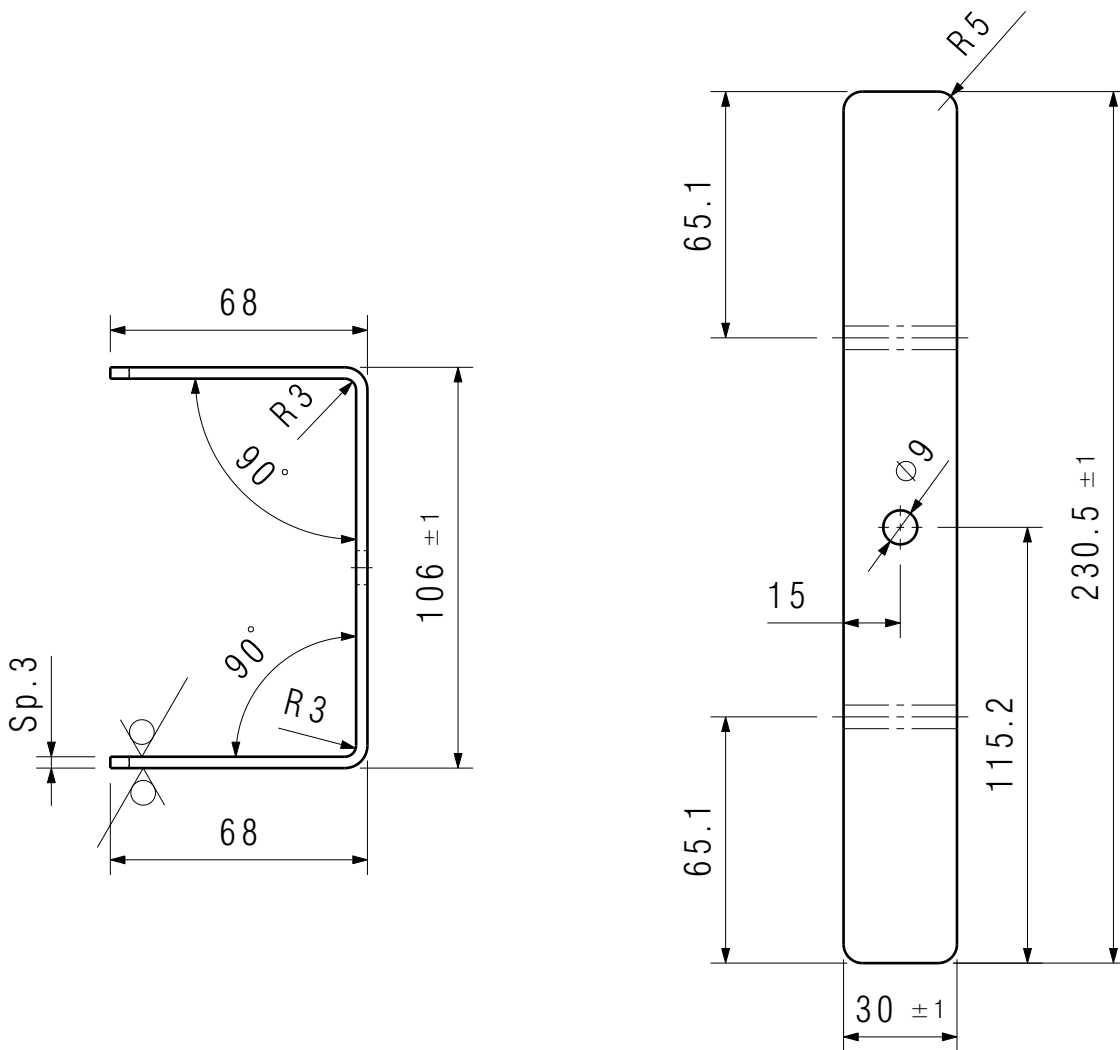

Isometric view

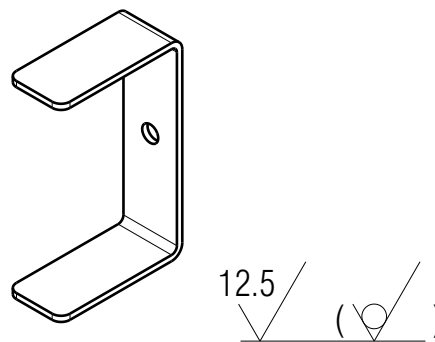

00	B19-011	C-1	Release Emissione	gsama	sbuzzolani	20/05/2019
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
 MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVAILING LAW				Treatment: -- Trattamento: --		Creation Date
				Surf.Finish: Zinc Coating Electrolytic Ref. Cap TS-002 Finitura sup: Zincatura Elettrol. Rif. Cap TS-002		14/03/2019
Model: --				Material: S235 EN 10025-1:2005		Weight [Kg]
Group: --				Blank Decr: -- Descr.Grezzo: --		0,162
Critical Lev: --				Blank: --		Perimeter [mm]
Part Nr: B0C1P3144				Wet Area[m2]: --		541
Description: Fixing u bolt Descrizione: Cavallotto di fissaggio				European method  Scale: 1:2		Circumferences included