







SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.
Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico



	0,4	—0,2/100
	0,4	//0,2/100
	0,25	⊥ 0,2/100

Angles ± 1°
Angoli ± 1°

General tolerance - Tolleranza generale: UNI EN 22768/1 - M									
Length and Diam. Lung. e Diametri	0,00	6,00	30,0	120	315	1000	2000	> 4000	
Tolerance Tolleranza	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2,0	±3,0	

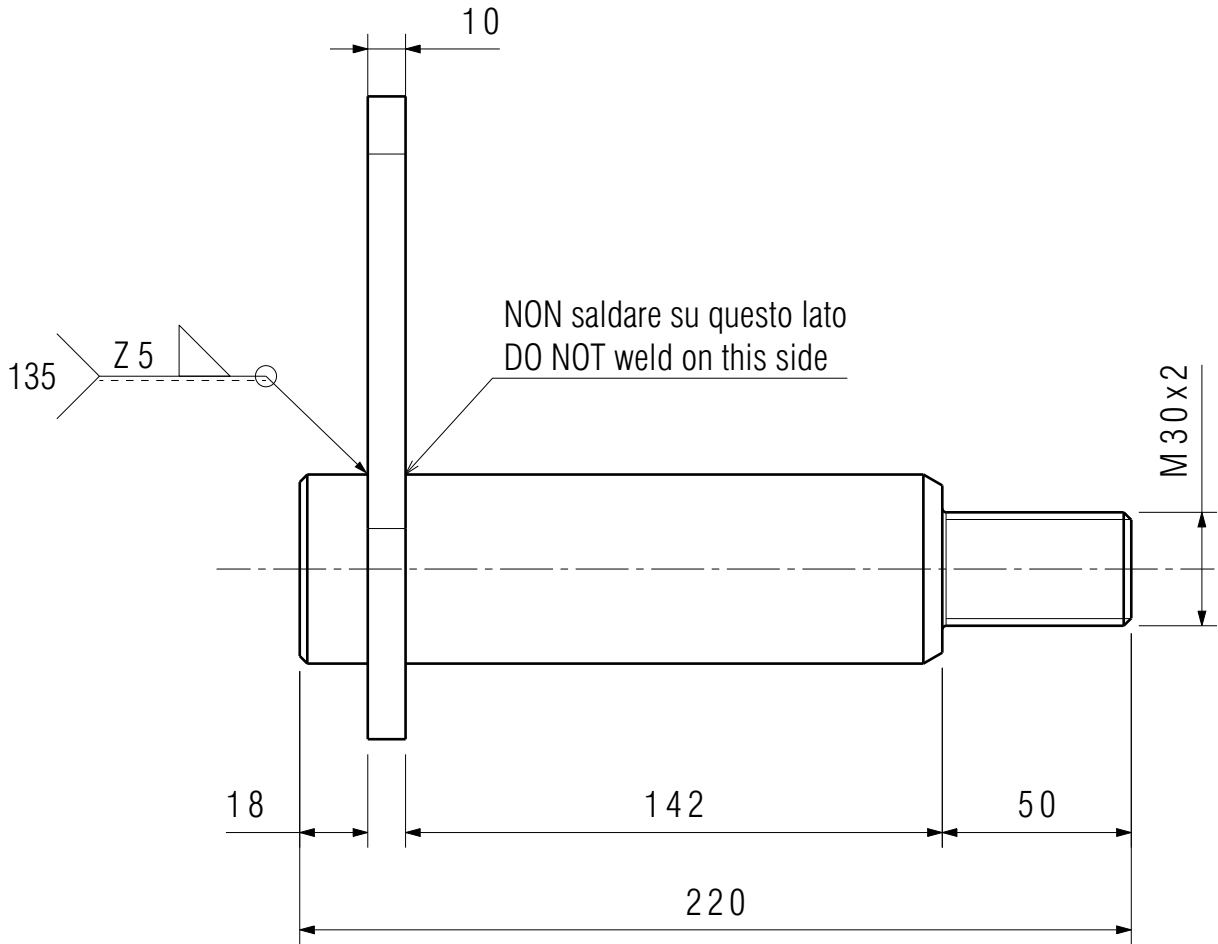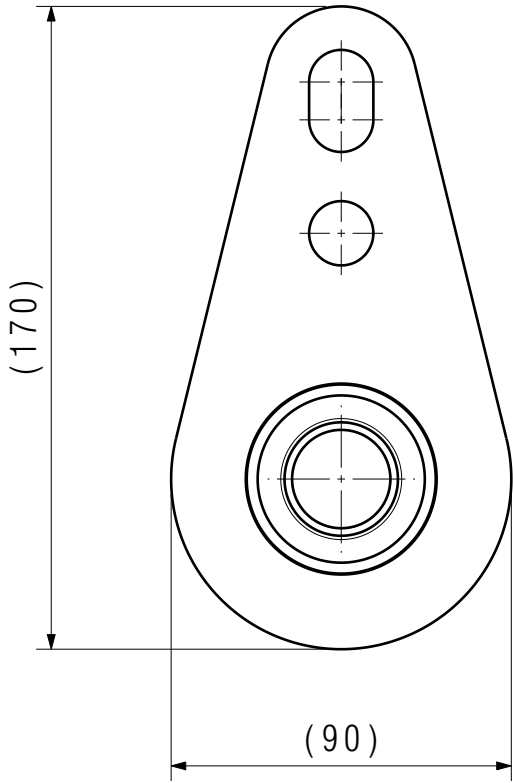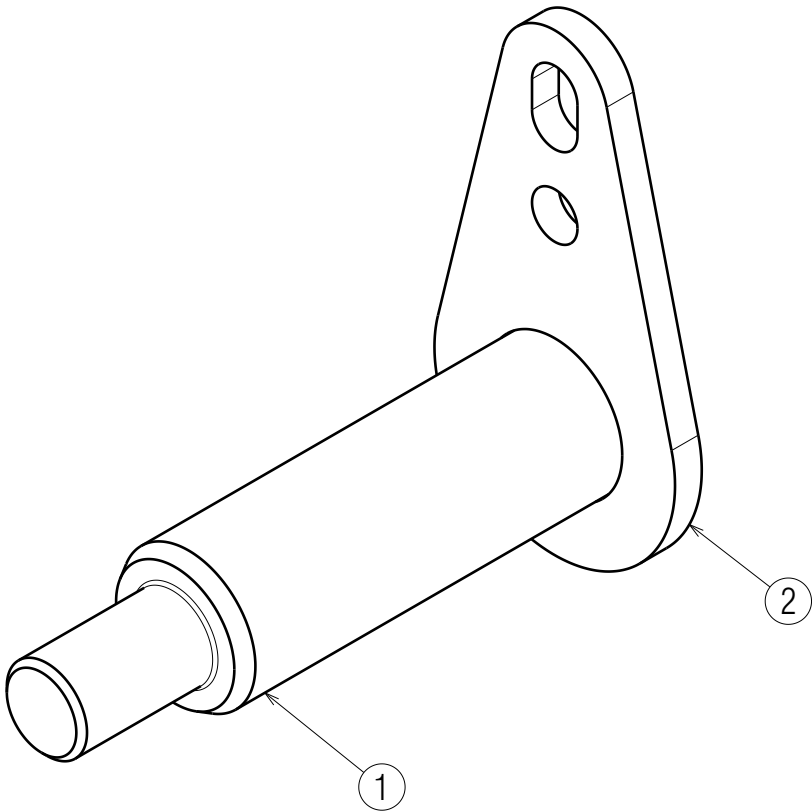

2	M32700721	1	Piastra antirotazione perno D50	Anti-rotation plate pin D50
1	M79700126	1	Perno D=50 L=170	Pin D=50 L=170
Pos.	Part Number	Q.ty	Descrizione	Description

01	M21-080	C-2	Variato quota da 145 a 142mm Changed connection 145 to 142mm		dbordigato	Igeretto	13/01/2023	
Rev	Mod. N.	Type	Modification object / Descrizione modifica			Drawn by	Approved by	Approv. Date
<div></div> <div>MASCHIO GASPARDO S.p.A. Via Marcello, 73 - 35011 Campodarsego (Padova) - Italy Email: info@maschio.com www.maschionet.com</div> <div>THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW</div>					Treatment: --			Creation Date
					Trattamento: --			
					Surf.Finish: Zinc Coating Flake Ref. Cap TS-021			06/05/2019
					Finitura sup: Zincatura lamellare Rif. Cap TS-021			
					Material:			WELDED ASSEMBLY / COMPOSTO SALDATO ref. Cap.TS-030
Model:								
Group:		Critical Lev:	Blank Decr: --			3,527		
--		--	Descr.Grezzo: --					
Part Nr: M79700127			Replace: --	Blank: --		Wet Area[m2]: --	Perimeter [mm]	
Description: Pin D=50 L=145			European method			Scale: 1:2	Circumferences included	
Descrizione: Perno D=50 L=145								