





1

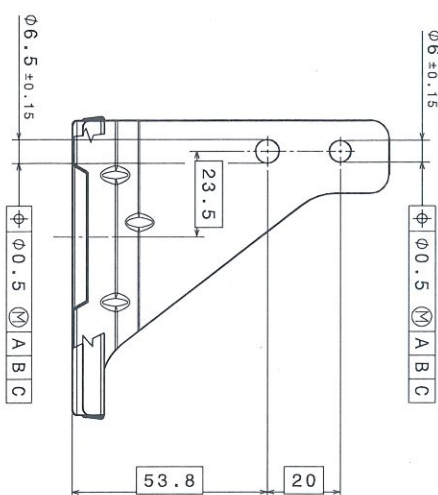

Unfolded view

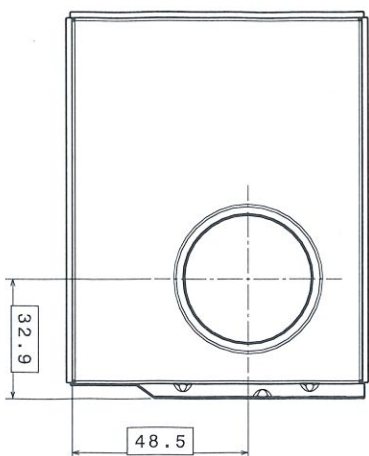

Isometric view

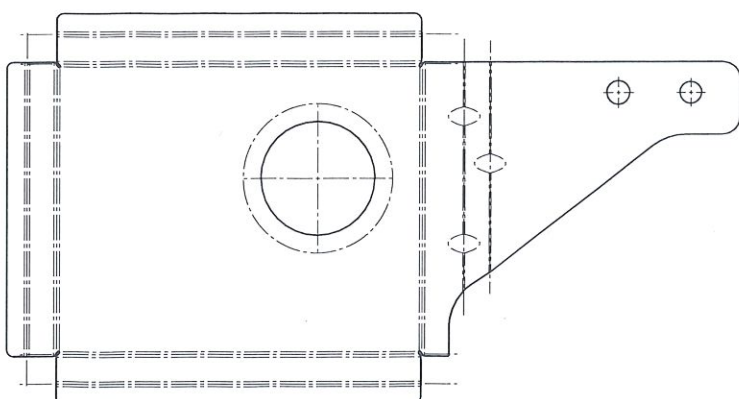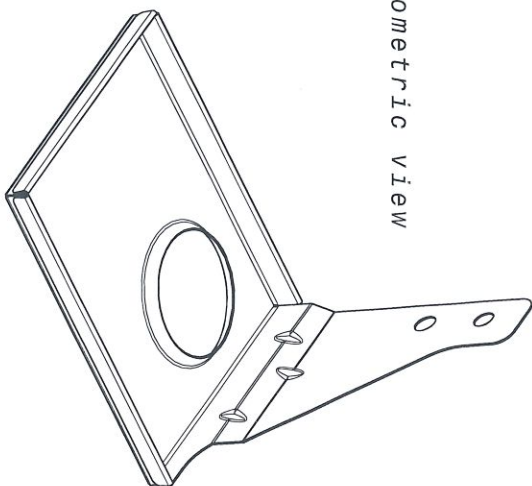

FOR ALL GEOMETRIES WITHOUT SPECIFICATION:
PROFILE TOLERANCE

NOTES

- Material: DX51D+Z100 M-B-C (FePO2 6Z100 MG) Thk: 5/10 ACCORDING TO UNI-EN 10346
- ALL SHEARED HOLES AND EDGES MUST BE WITHOUT ANY BURRS OR SHARP EDGE;
- THE PART MUST BE PASSIVED AND ABSOLUTELY FREE FROM OIL AND GREASE.

FOR ALL MISSING DIMENSIONS REFER TO THE 3D MODEL AND APPLY GENERAL TOLERANCES

PRELIMINARY DRAWING

VALID FOR QUOTATION ONLY

A2534201/A		001		OMEGA 400		ZP		BASE VARIANT.	
VARIANT NUMBER	REV.	REPLACES NUMBER	MODEL/APPLICATION	VARIANT USERS					DESCRIPTION
4	1	5	6	1	7	8			

A2532420

50.000 B/two

Stress, 0.5
Zincato