


In case of heat exchanger drawing:Category ACC.to the european directive 97 /23 /EC:ART.3 PAR.3t;tested and certificated ACC. to sound engineer practice.

This document is our property and shall not be altered,copied,used for manufacturing or communicated to any other person or company without our permission

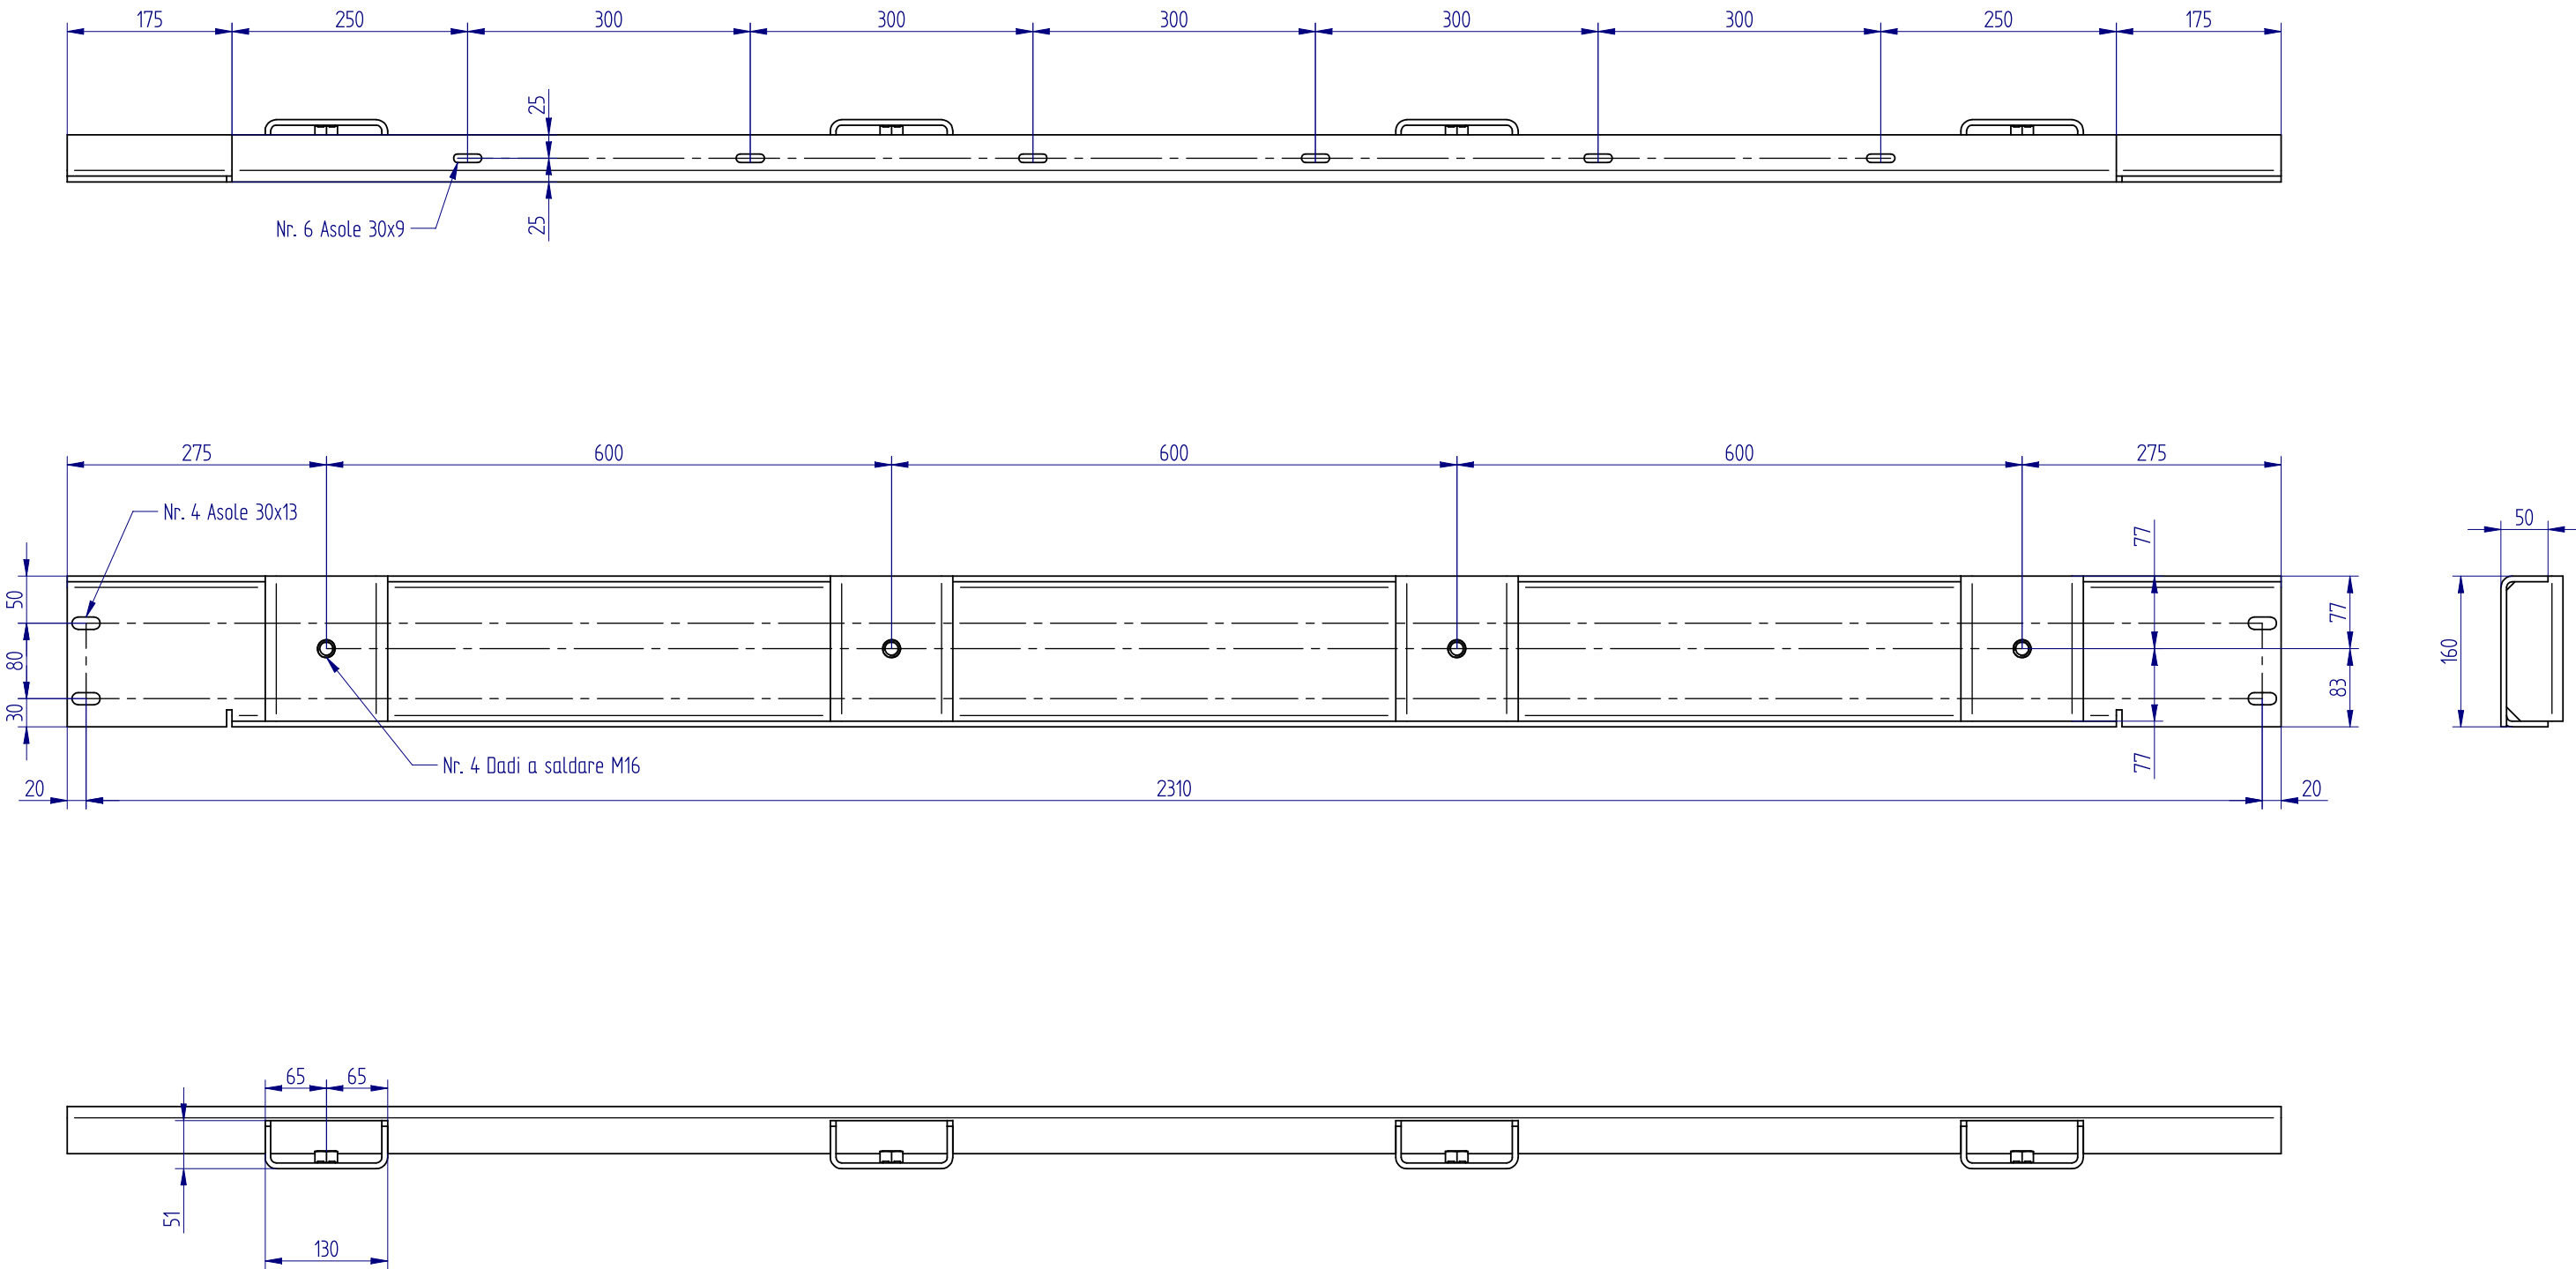



NOTES:

TUTTI GLI SPIGOLI ESENTI DA BAVE
ALL CORNERS TO BE BURR FREE

SUPERFICI ESENTI DA AMMACCATURE, OLIO, COLLA, GRAFFI E ALTRI DIFETTI
SURFACES AREA MUST BE FREE FROM DENTS,OIL,GLUE,STICKER AND OTHER DEFECTS

I LEMBI DEVONO ESSERE ACCOSTATI PER EVITARE FESSURE E SALDATI ALL'INTERNO A TRATTI DI 10-15 mm
FLANGES MUST BE APPROACHED TO AVOID CHINK. THEY MUST BE WELDED INSIDE WITH 10-15 mm MARKS

PARTI FILETTATI ESENTI DA VERNICIATURA
THREADS EXEMPT FROM PAINTING

-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
REV.	DESCRIPTION				DRW.	n° Project			DATE
General Tollerances ISO 2768-m		0.5-3 ±0.1	3-6 ±0.1	6-30 ±0.2	30-120 ±0.3	120-400 ±0.5	400-1000 ±0.8	1000-2000 ±1.2	2000-4000 ±2
Material (Oesse specifications:SP095) DD11 EN 10111 Sp 6mm					Painting: CATAFORESI				
Treatment : Oesse specifications: SP092			First Issue Date 27/11/2012		Last Issue Date 27/11/2012			Scale 15	Page 1 / 2
Weight 31.625 kg			Designer 3D		Designer 2D			App/Ver	
			Description PIASTRA INF CAT.						
			Project N° PR12/251		Derived From Code: -			Code PS41305F.00	

In case of heat exchanger drawing:Category ACC.to the european directive 97 /23 /EC:ART.3 PAR.3t;tested and certificated ACC. to sound engineer practice.

This document is our property and shall not be altereded,copied,used for manufacturing or communicated to any other person or company without our permission


NOTES:

TUTTI GLI SPIGOLI ESENTI DA BAVE
ALL CORNERS TO BE BURR FREE



SUPERFICI ESENTI DA AMMACCATURE, OLIO, COLLA, GRAFFI E ALTRI DIFETTI
SURFACES AREA MUST BE FREE FROM DENTS,OIL,GLUE,STICKER AND OTHER DEFECTS



I LEMBI DEVONO ESSERE ACCOSTATI PER EVITARE FESSURE E SALDATI ALL'INTERNO A TRATTI DI 10-15 mm
FLANGES MUST BE APPROACHED TO AVOID CHINK. THEY MUST BE WELDED INSIDE WITH 10-15 mm MARKS

PARTI FILETTATI ESENTI DA VERNICIATURA
THREADS EXEMPT FROM PAINTING

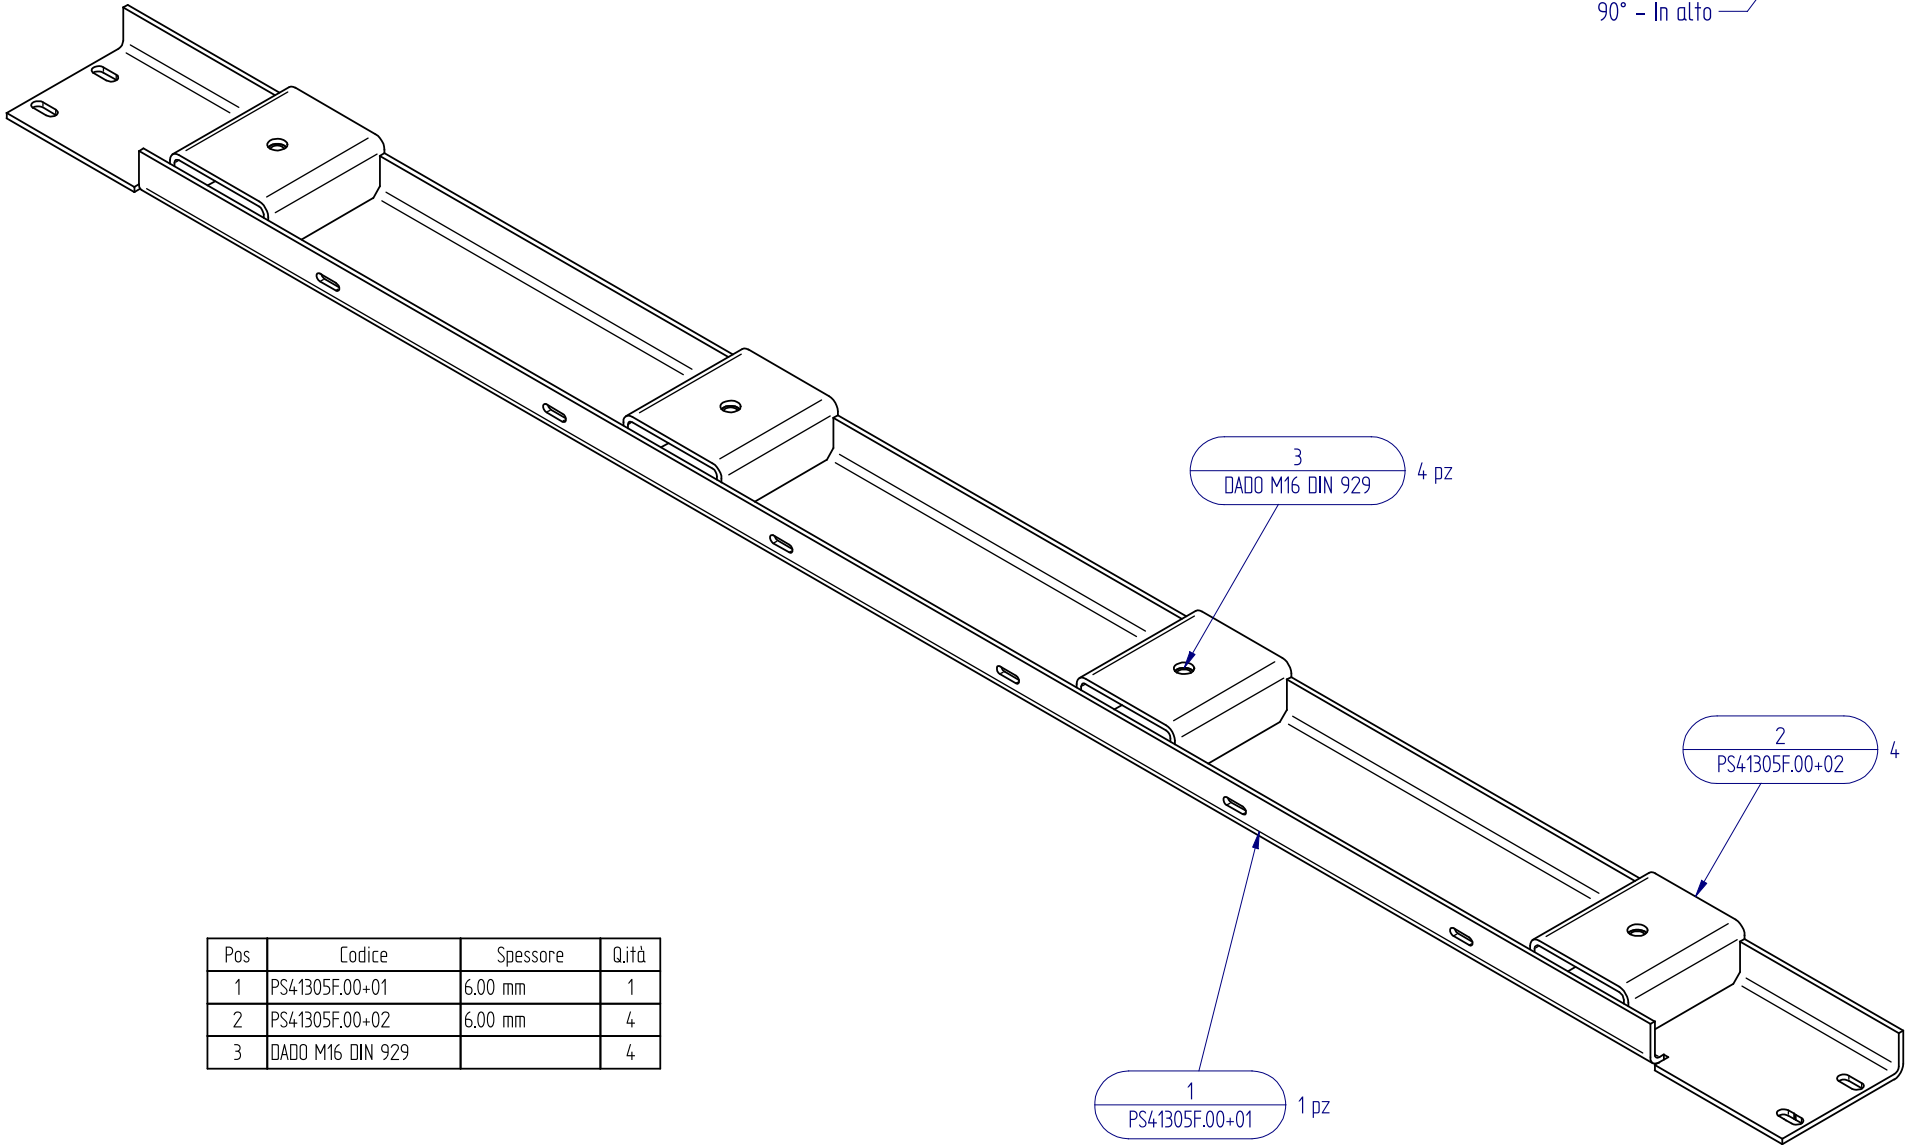

Pos	Codice	Spessore	Q.ità
1	PS41305F.00+01	6.00 mm	1
2	PS41305F.00+02	6.00 mm	4
3	DADO M16 DIN 929		4

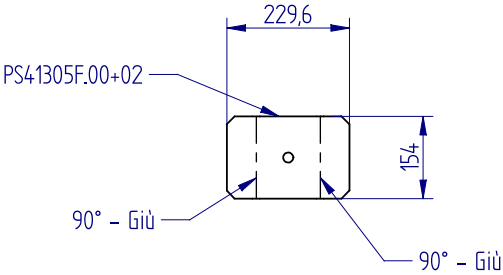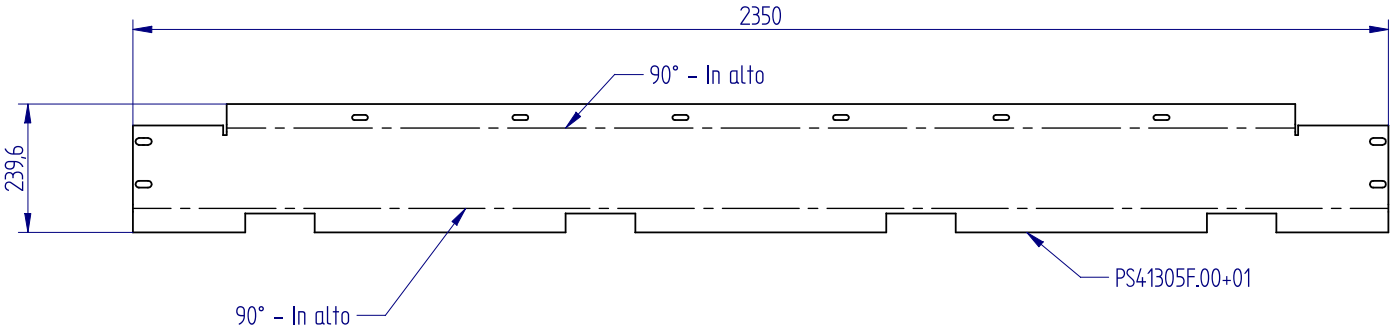

-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
REV.	DESCRIPTION				DRW.	n° Project			DATE
General Tollerances ISO 2768-m		0,5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000
		±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
Material (Oesse specifications:SP095)					Painting: CATAFORESI				
DD11 EN 10111 Sp 6mm									
Treatment : Oesse specifications: SP092		First Issue Date 27/11/2012			Last Issue Date 27/11/2012			Scale 15	Page 2 / 2
Weight 31.625 kg		Designer 3D ZANATA			Designer 2D ZANATA			App/Ver M. C.	
		Description PIASTRA INF CAT.							
		Project N° PR12/251			Derived From Code: -			Code PS41305F.00	