

SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA


Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.

Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico




	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

General tolerance - Tolleranza generale: UNI EN 22768/1 - M			
Length and Diam. Lungh. e Diametri	0.00 6.00	6.00 30.0	30.0 4000
Tolerance Tolleranza	± 0.1 ± 0.2 ± 0.3 ± 0.5 ± 0.8 ± 1.2 ± 2.0 ± 3.0		

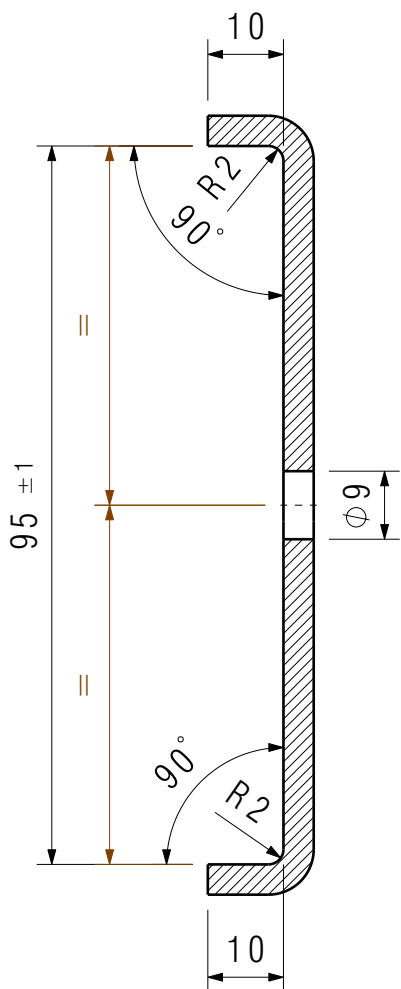

Section
view A-A

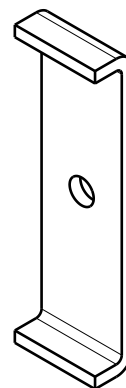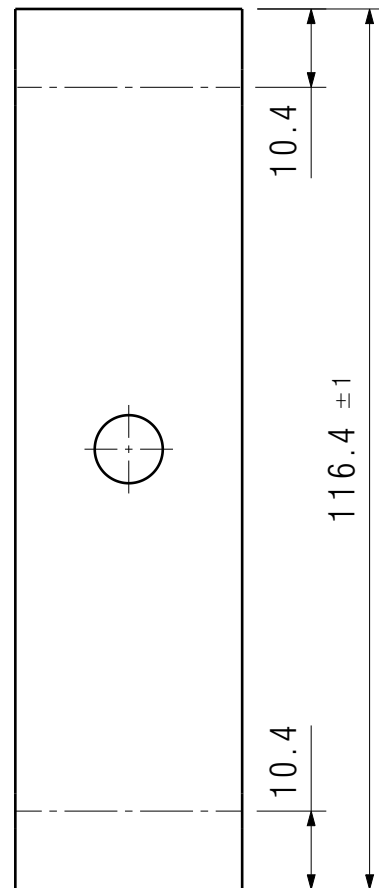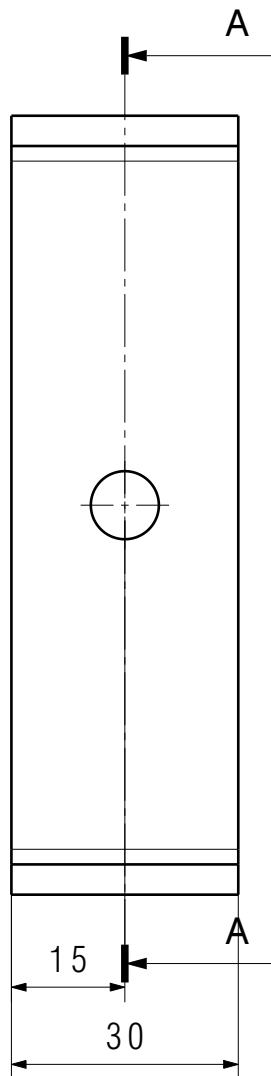

01	B20-003	C-1	UPLOADED IN CATIA V6+ADDED ZINC INSERITO IN CATIA V6+AGGIUNTO ZINCATURA	Idalcero	sbuzzolani	10/03/2020
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
 MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVAILING LAW				Treatment: -- Trattamento: --		Creation Date
				Surf.Finish: Zinc Coating Electrolytic Ref. Cap TS-002 Finitura sup: Zinatura Elettrol. Rif. Cap TS-002		10/03/2020
Model: -- Group: -- Critical Lev: -- Part Nr: B0C005132 Replace: --				Material: S355 EN 10025-1:2005		Weight [Kg]
				Blank Decr: -- Descr.Grezzo: --		0,111
Description: FASTENING STAND Descrizione: CAVALLOTTO DI FISSAGGIO				Blank: --	Wet Area[m2]: --	Perimeter [mm]
				European method	Scale: 1:1	321
						Circumferences included