GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

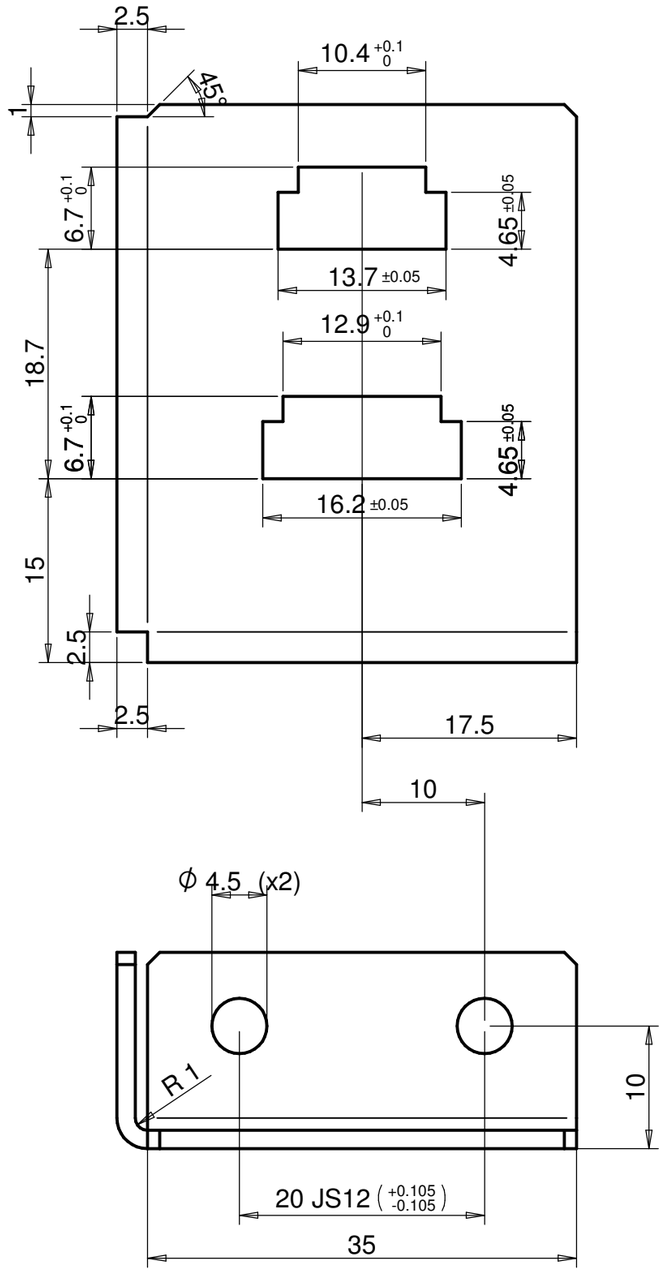

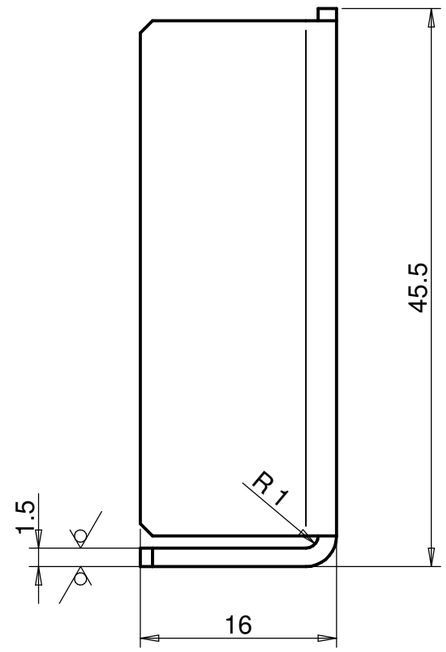

6.3 ( )

SMUSSI NON QUOTATI 2x45° / Beveling without dimension
BAVA MAX. 0,04 mm / MAXIMUM BURR 0,04 mm

CN04874		21/07/2021	0
Change	Modification details:	Date Mod:	IRP
Changes to previous release: ELIMINATO SEDE PER CONNETTORE		Obtain from:	Substitute: 019601.0.0
Material: DC01+A-G UNI EN 10130		Code: 4032_6152_99	
Supply state: +A-G: SURFACE A FINISHING G		Dimensions:	
Thermic treat.:		Hardness(T):	
Surface treat.: Fe/Zn 8÷12 A HP UNI ISO 2081 free Cr VI		Hardness(S):	

Approved

DENOMINATION: REGGETTA CONNETTORI

Savio	Draw.: Renzo Del Bianco	Date: 18/10/2017	019601.1.0
	Mod. : Patrizio Santarossa	Sheet N°: 1/1	
	App. : Massimo Velludo	Scale: 2:1	BRACKET

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.