



This document must not be copied without our written permission, and the contents therefore must not be imported to a third party nor be used for any unauthorized purpose. Contamination will be prosecuted k. l

Rev.	Revision Description	Date	By
A	Legacy revision update	09.05.2017	PeLi

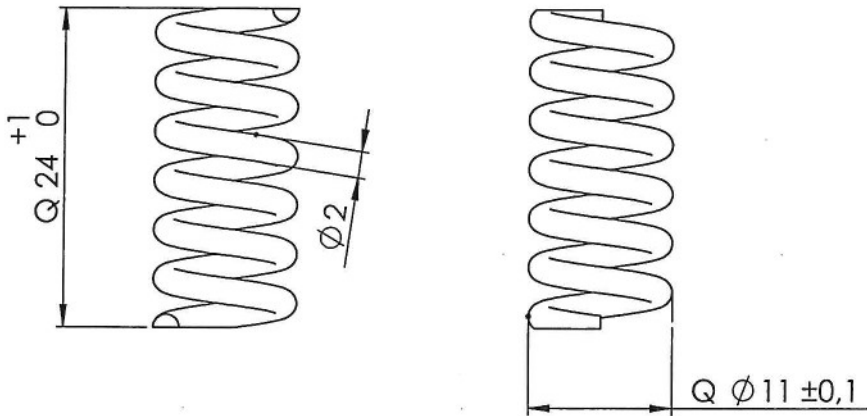

Material: LkC 2.0 mm
Do = 11.0 mm
L = 24.0 mm
Revolutions : 5.5 - 6.0

Untolerated dimensions: ISO 2768-c

	Linear dimensions;								Angular; (shorter side lenght)					Rad and chamfer;		
Dim range	0,5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	Up to 10	>10-50	>50-120	>120-400	>400	0,5-3	>3-6	>6
Tolerance	+0,2	+0,3	+0,5	+0,8	+1,2	+2,0	+3,0	+4,0	+1° 30'	+1°	+0° 30'	+0° 15'	+0° 10'	+0,4	+1,0	+2

Material:


Spring steel EN 10270-1 Sh : Zn coated

Surface treatment:

Design								UML	
Released								PeLi	
09.05.2017								Rev.	
Code								A	
Status								Production	

Size
A4

Scale
2:1



Sheet
1 / 1

Surface treatment area
0 m²

Real area
0.001 m²

Weight
0.004 kg

Commercial code

Spring
Ø11x24mm
For shelf
Dairy tainer

Code
HCMF60688

Status
Production