


040273

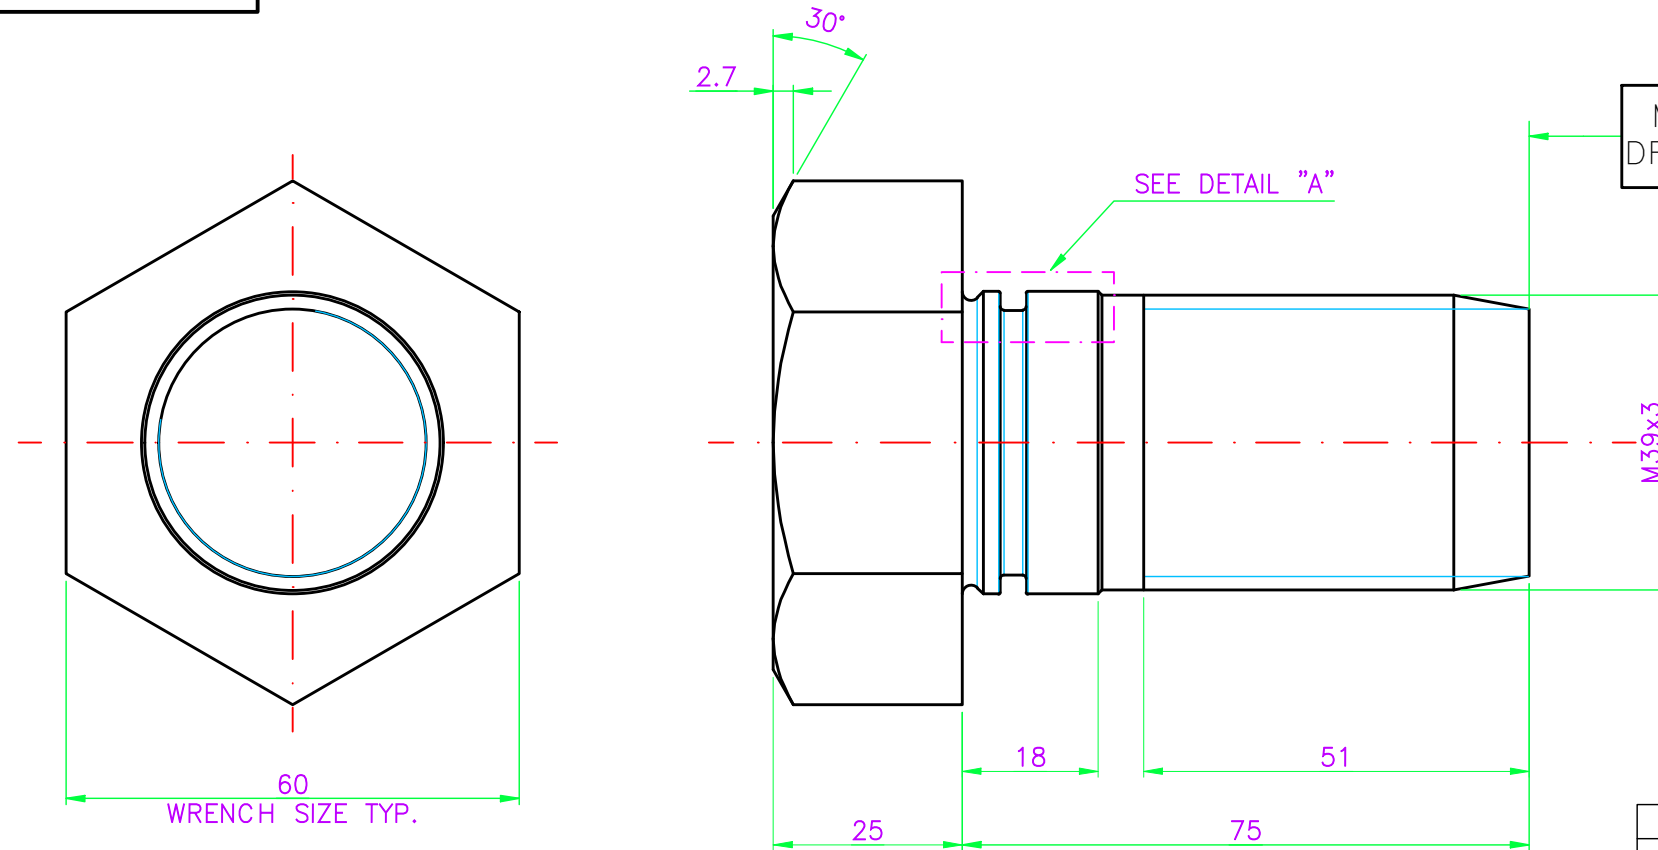

NOTES FOR MECHANIZED PARTS

CONTROLS REQUIRED FOR RAW MATERIAL:

QUALITY CERTIFICATE OF MATERIAL (ITM-STD40200/EN 10204 3.1)

ULTRASONIC TEST (ITM-STD40201) / PARTS CHECKED % / CLASS VALUE: ☒

LIST OF CONTROLS TO BE DONE:

X-RAY TEST (ITM-STD40202) / PARTS CHECKED % / CLASS VALUE: ☐

HARDNESS TEST (ITM-STD40500) / PARTS CHECKED % ☐

DIMENSIONAL CONTROL (ITM-STD40400) STC PARTS CHECKED % ☐

100% VISUAL INSPECTION ☒

NOTES:

1. GENERAL MACHINING ☒ UNLESS OTHERWISE SPECIFIED.
2. ALL DIMENSIONS ARE IN MILLIMETERS (mm).
3. BREAK ALL SHARP EDGES.
4. OBTAIN FROM HEX. FIT BOLT M39 x 3 x 75-8.8 Z (RUSSULA STANDARD S60019 - DIN 609).
5. DO NOT PAINT. "TECTYL 502-C" OR SIMILAR MUST BE USED FOR PROTECTION.

GENERAL TOLERANCES ACCORDING TO R.S.A.U. STD 40073

MATERIAL SEE NOTE 4 CONDITION:

UNITS: METRIC


SCALE: 1:1

DATE: 30-11-20

DRN: DDV

HEX. FIT BOLT
M39 x 3 x 75
RIGHT THREAD

FIRST ANGLE
PROJECTION



REV.

IRI N°

A

FIN WT: 1.3 kg

SHEET 1 OF 1

040273

DETAIL "A"
SCALE 5:1