GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

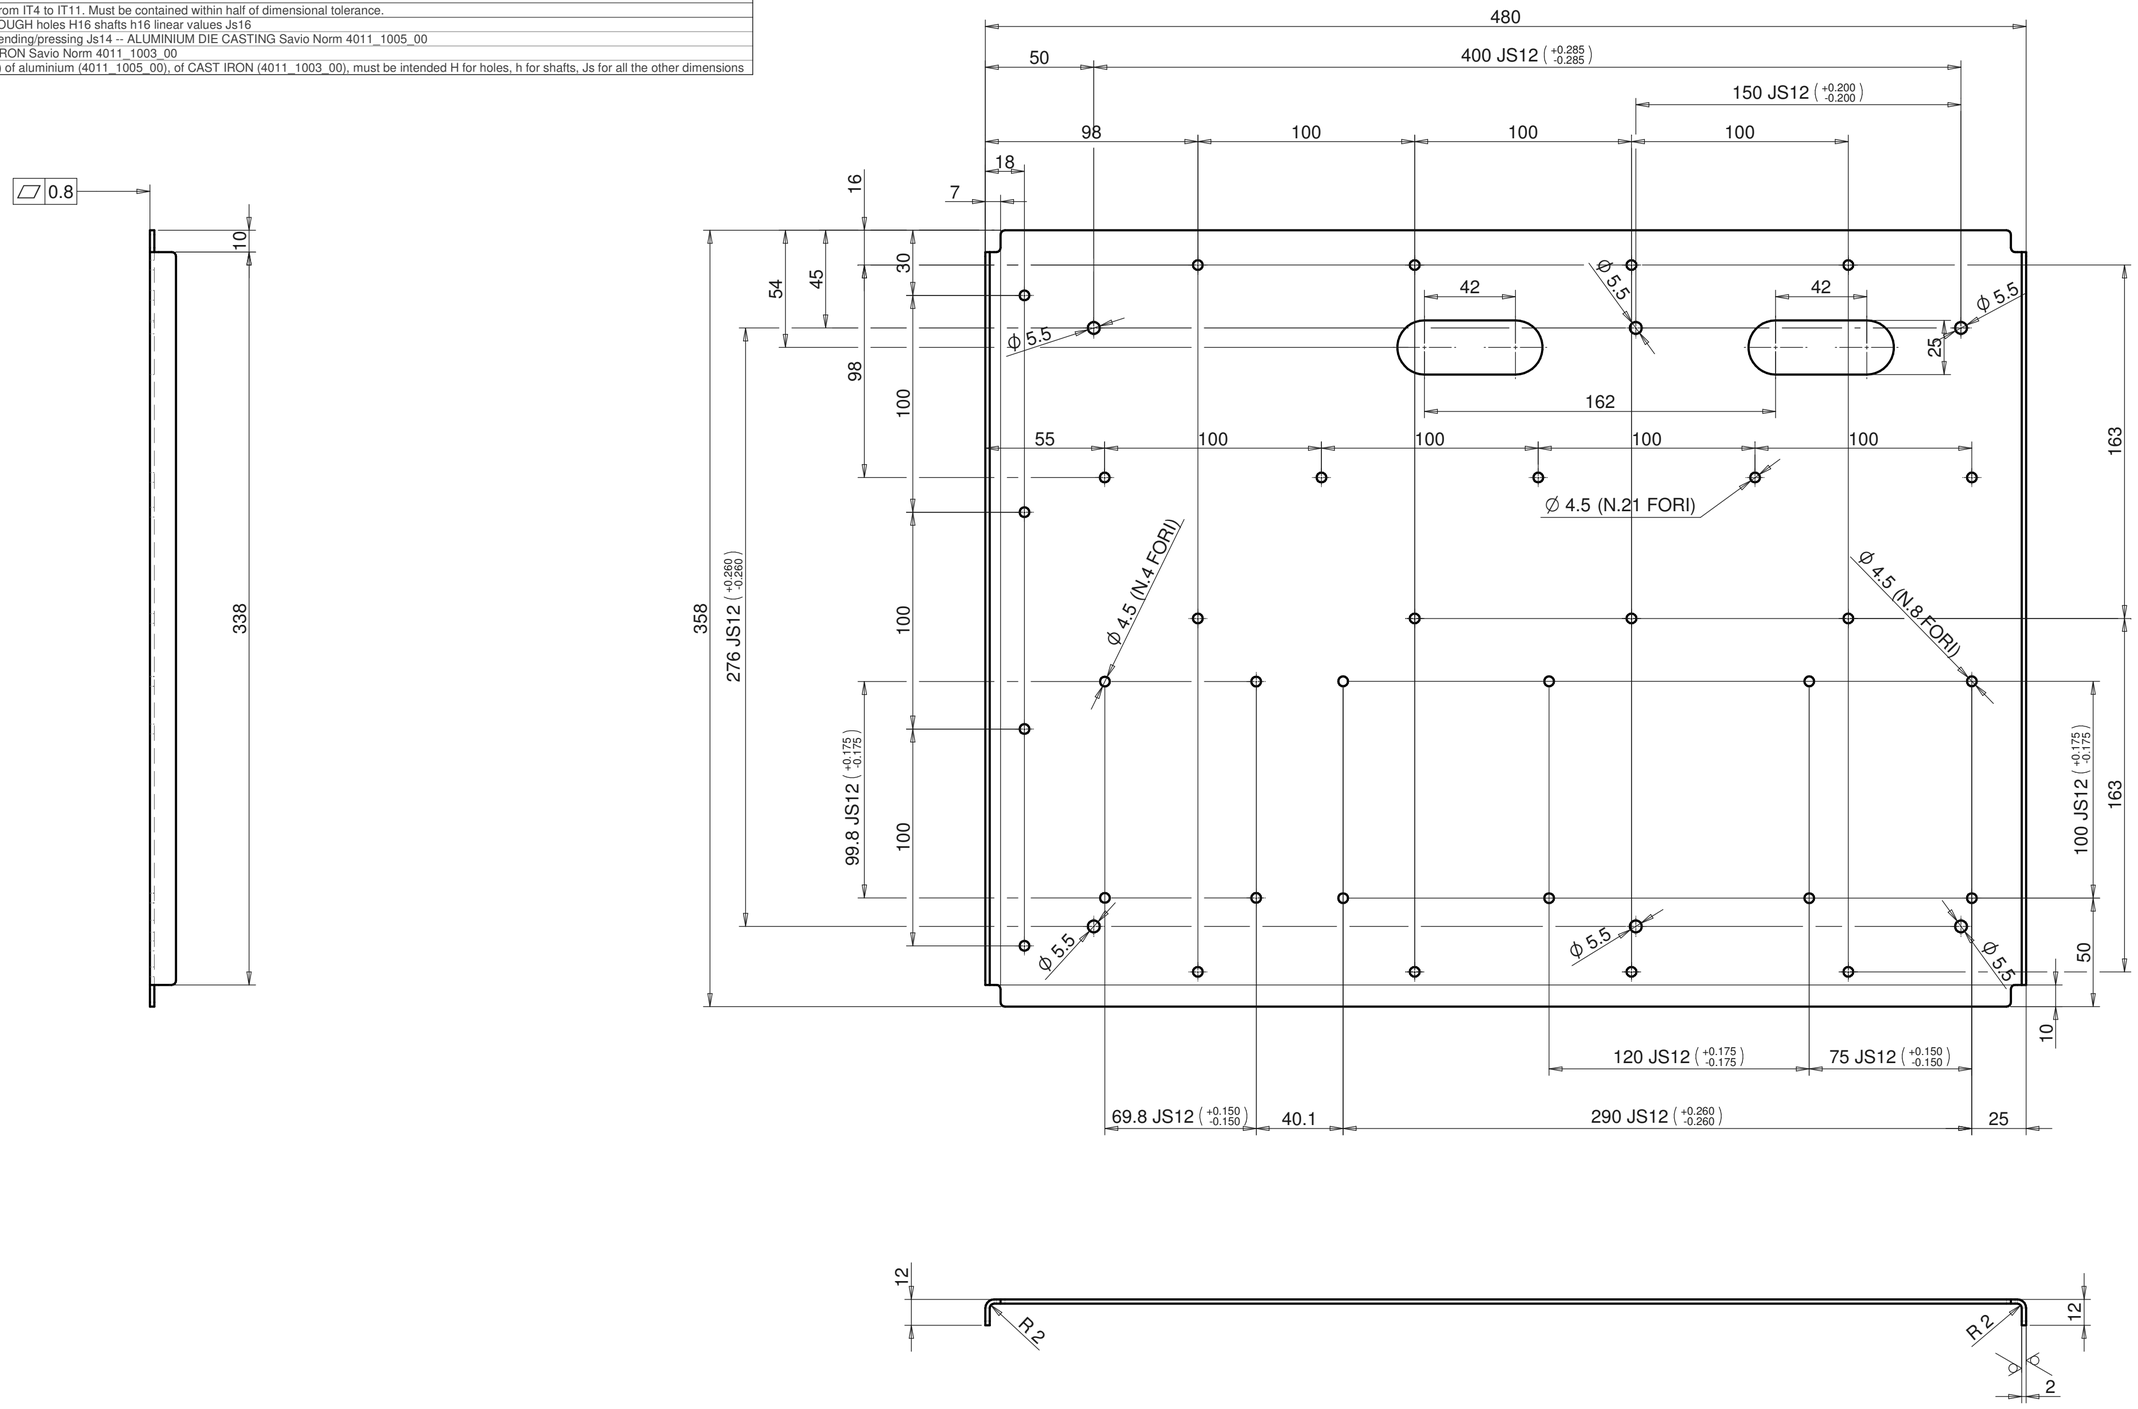

6.3 ( )

RAGGI NON QUOTATI R=2
BAVA MAX 0.04

CN05183		24/09/2021	00
Change	Modification details:	Date Mod:	IRP
Changes to previous release:	Obtain from:	Substitute:	
Material: DC01+A-G UNI EN 10130	Code: 4032_6152_99		
Supply state: +A-G: SURFACE A FINISHING G	Dimensions:		
Thermic treat.:	Hardness(T):		
Surface treat.: Fe/Zn 8÷12 A HP UNI ISO 2081 free Cr VI	Hardness(S):		

DENOMINATION: PIASTRA APPARECCHIATURA SX

Savio	Draw.: Michele Simonatto	Date: 09/09/2021	046752.0.0
	Mod. : Michele Simonatto	Sheet N°: 1/1	
	App. : Giuseppe Morini	Scale: 1:5	PLATE

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.