



SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.  
Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico

	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100

Angles  $\pm 1^\circ$   
Angoli  $\pm 1^\circ$

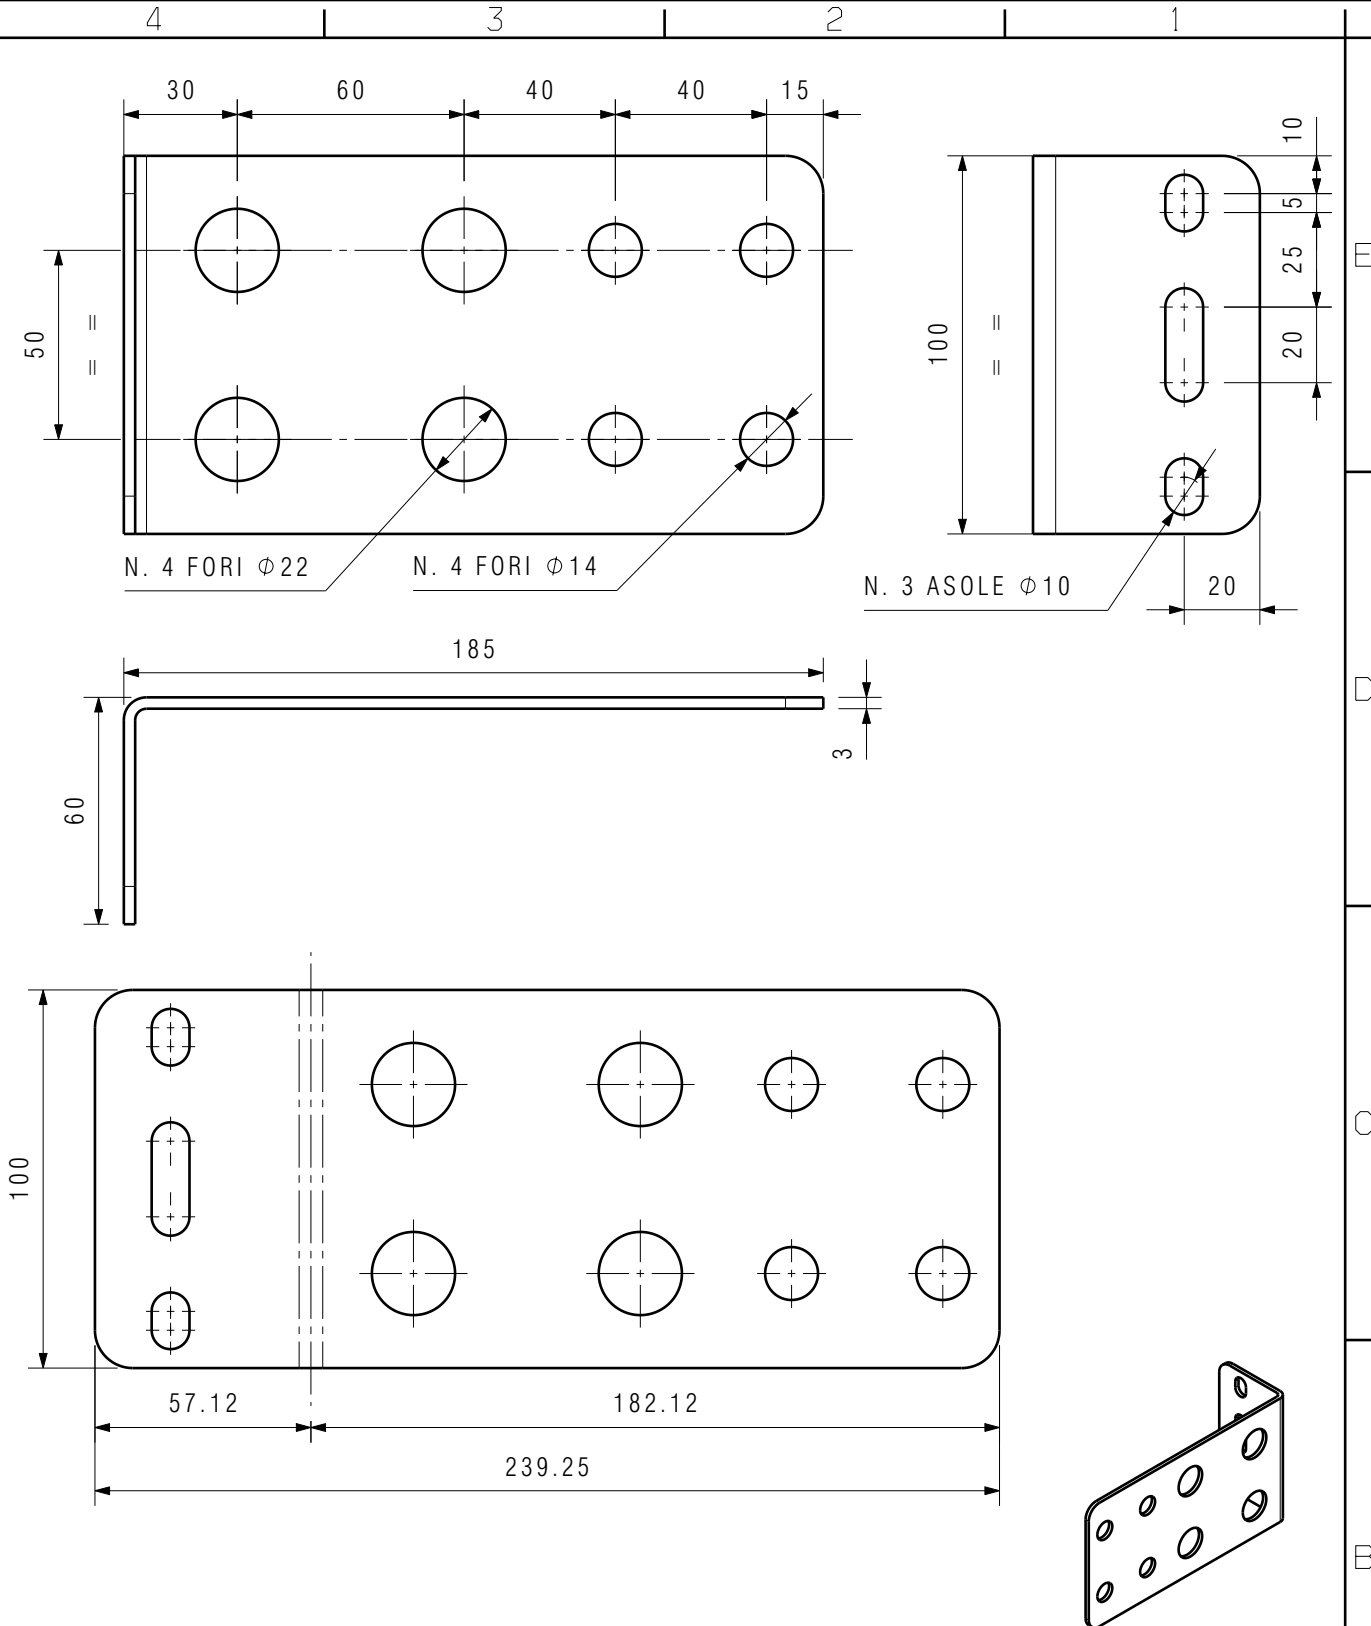

Isometric view

NB: PER QUOTE MANCANTI FARE RIFERIMENTO A DXF

01	N20-004	D-3	holes added for KAMBA Inseriti fori per KAMBA	smorutto	ndorigutto	05/02/2020
Rev	Mod. N.	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
 MASCHIO GASPARDO S.p.A. Via Marcello, 73 - 35011 Campodarsego (Padova) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW				Treatment: -- Trattamento: -- Surf.Finish: Zinc Coating Hot-Dip Ref. Cap TS-037 Finitura sup: Zincatura a caldo Rif. Cap TS-037 Material: S235 EN 10025-1:2005		
Model: -- Group: -- Critical Lev: -- Blank Decr: -- Descr.Grezzo: --				Creation Date 31/01/2020 Weight [kg] 0,501		
Part Nr: U24040316 Replace: --				Perimeter [mm] --		
Description: PIAS.TUBI SEPAR.MACCH-BARRA Descrizione: PIAS.TUBI SEPAR.MACCH-BARRA				European method Scale: 1:2 Circumferences included		

General tolerance - Tolleranza generale: UNI EN 22768/1 - M			
Length and Diam. Lunghezza e Diametri	0.00 6.00 30.0 120 315 1000 2000 4000	±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2 ±2.0 ±3.0	
Tolerance Tolleranza	0.00 6.00 30.0 120 315 1000 2000 4000	±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2 ±2.0 ±3.0	