


PARTICOLARE PERFETTAMENTE SIMMETRICO A PS41305H.00
PER LA QUOTATURA FARE RIFERIMENTO A QUELLO
(PARTICOLARI IDENTICI, SOLO MONTATI IN MODO SIMMETRICO)

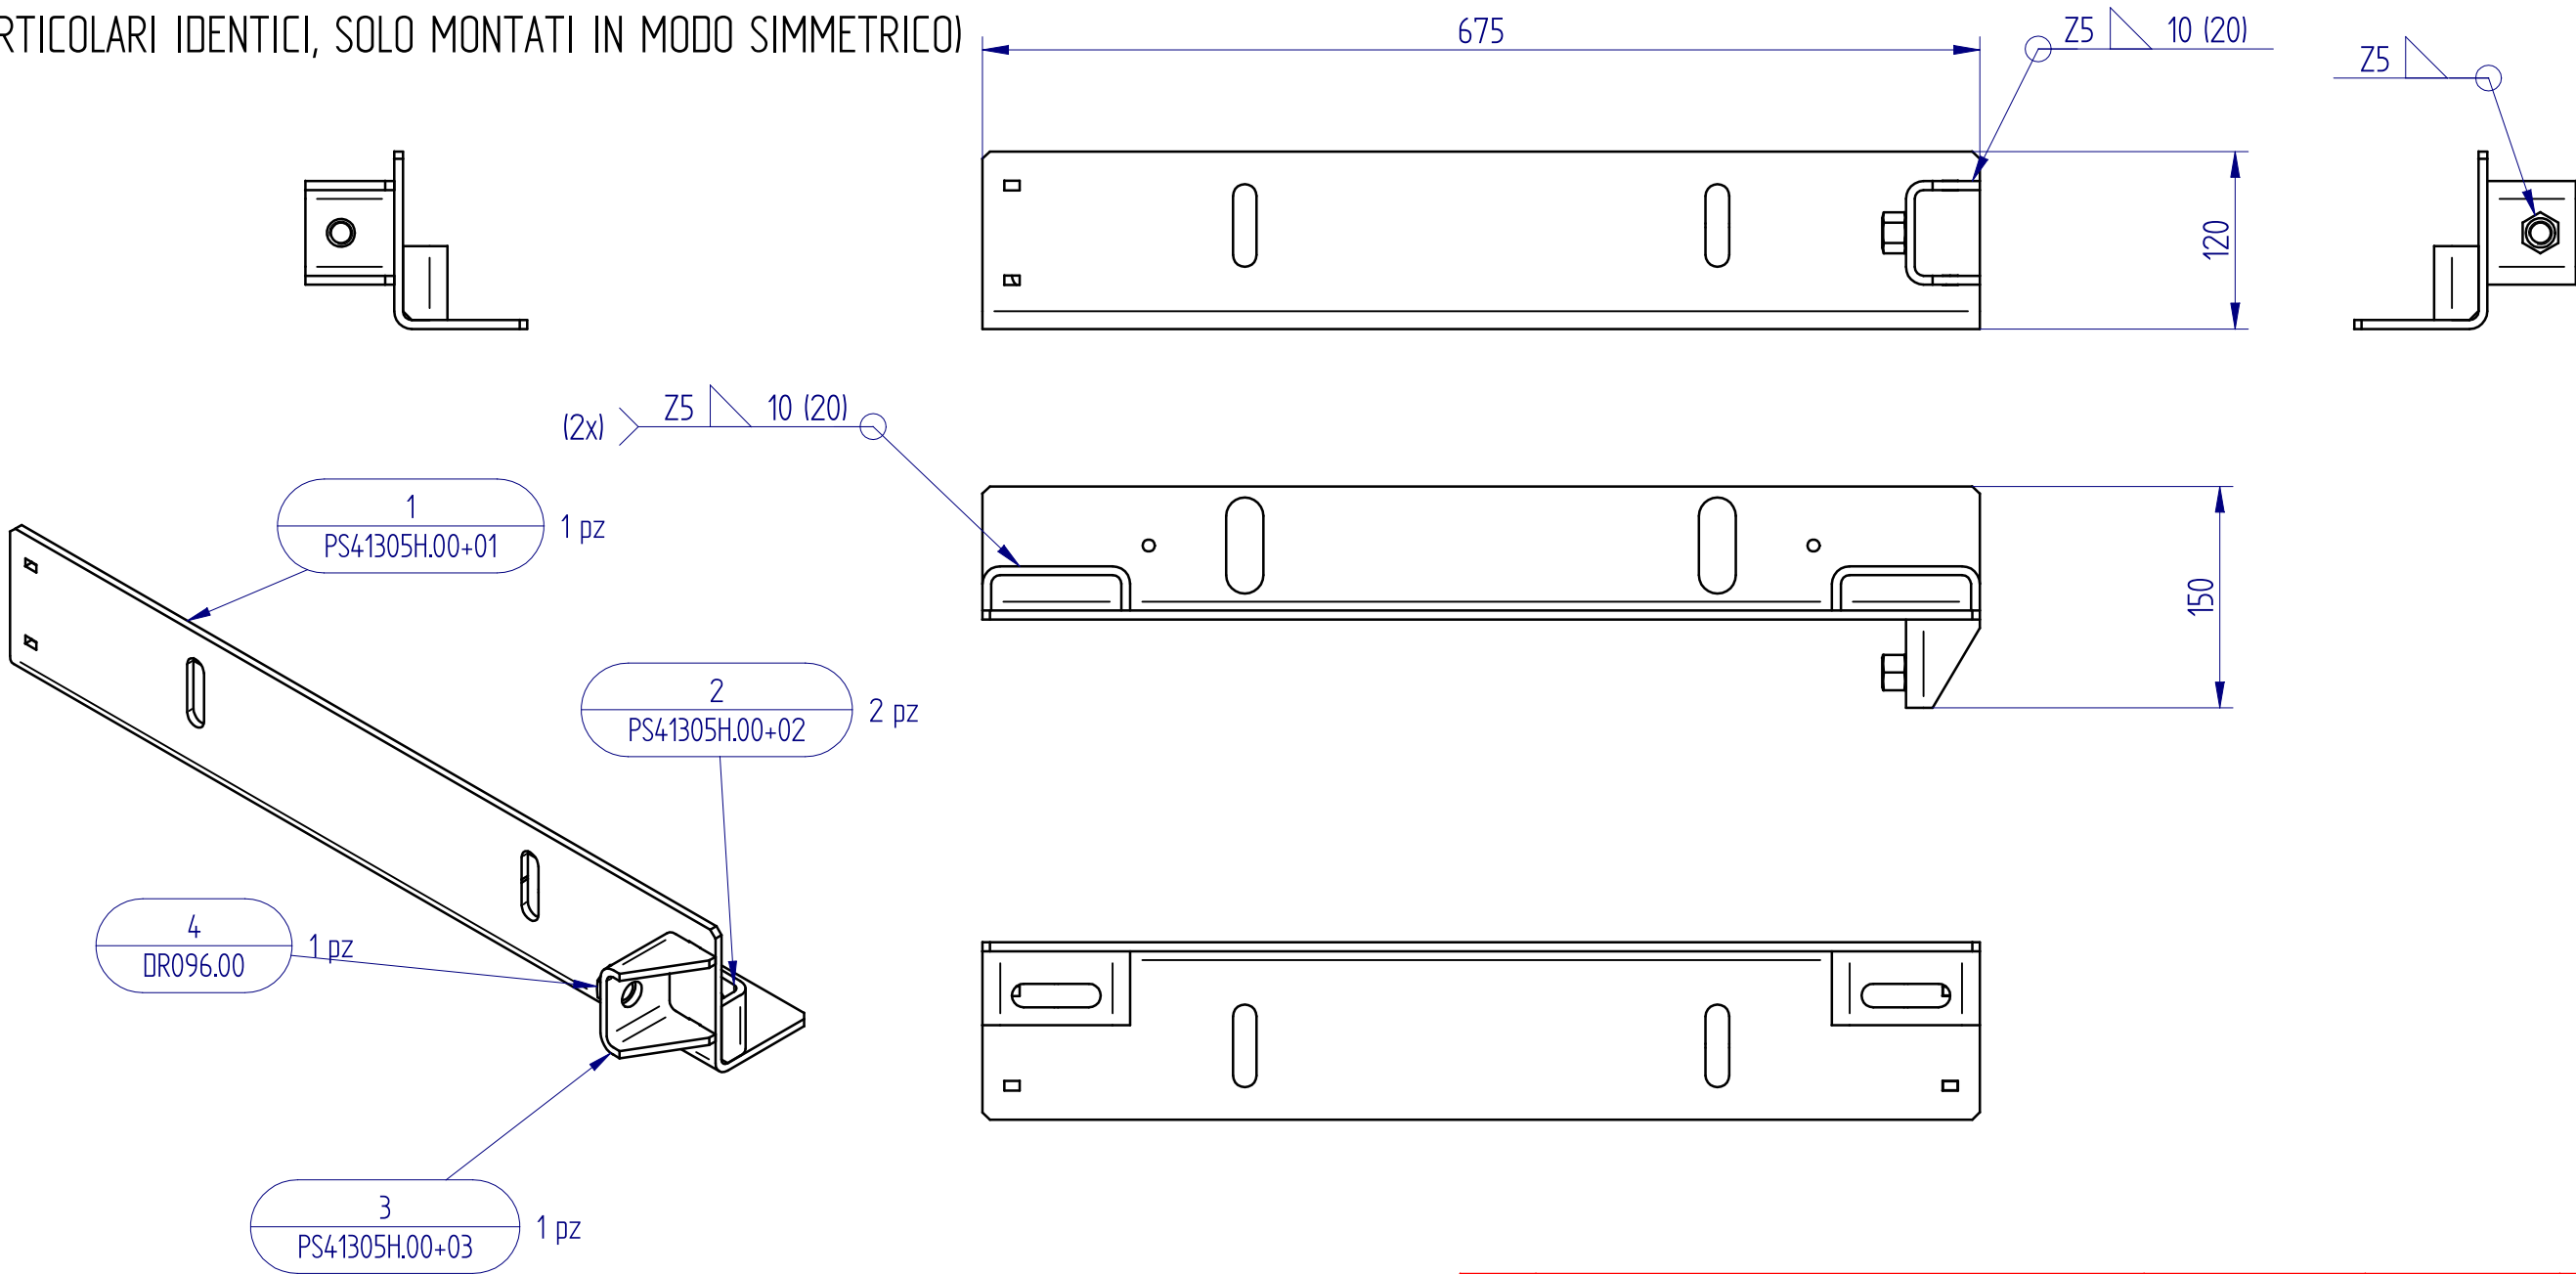

NOTES:

- TUTTI GLI SPIGOLI ESENTI DA BAVE
ALL CORNERS TO BE BURR FREE
- SUPERFICI ESENTI DA AMMACCATURE, OLIO, COLLA, GRAFFI E ALTRI DIFETTI
SURFACES AREA MUST BE FREE FROM DENTS,OIL,GLUE,STICKER AND OTHER DEFECTS
- I LEMBI DEVONO ESSERE ACCOSTATI PER EVITARE FESSURE E SALDATI ALL'INTERNO A TRATTI DI 10-15 mm
FLANGES MUST BE APPROACHED TO AVOID CHINK. THEY MUST BE WELDED INSIDE WITH 10-15 mm MARKS
- PARTI FILETTATI ESENTI DA VERNICIATURA
THREADS EXEMPT FROM PAINTING

Pos	Codice	Spessore	Q.ità
1	PS41305H.00+01	6.00 mm	1
2	PS41305H.00+02	6.00 mm	2
3	PS41305H.00+03	6.00 mm	1
4	DR096.00		1

-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
REV.	DESCRIPTION	DRW.	n° Project	DATE
General Tollerances ISO 2768-m		0.5-3 ±0.1	3-6 ±0.1	6-30 ±0.2
Material (Oesse specifications:SP095) DD11 EN10111 Sp 6mm		30-120 ±0.3	120-400 ±0.5	400-1000 ±0.8
Painting: CATAFORESI		1000-2000 ±1.2	2000-4000 ±2	Angoli ±1°
Treatment : Oesse specifications: SP092		First Issue Date 27/11/2012	Last Issue Date 27/11/2012	Scale 1:5
Weight 16.995 kg		Designer 3D	Designer 2D	Page 1 / 1
Description GUIDA DX CARRELLO CAT.		App/Ver		
Project N° PR12/251		Derived From Code: -		Code PS41305L.00