

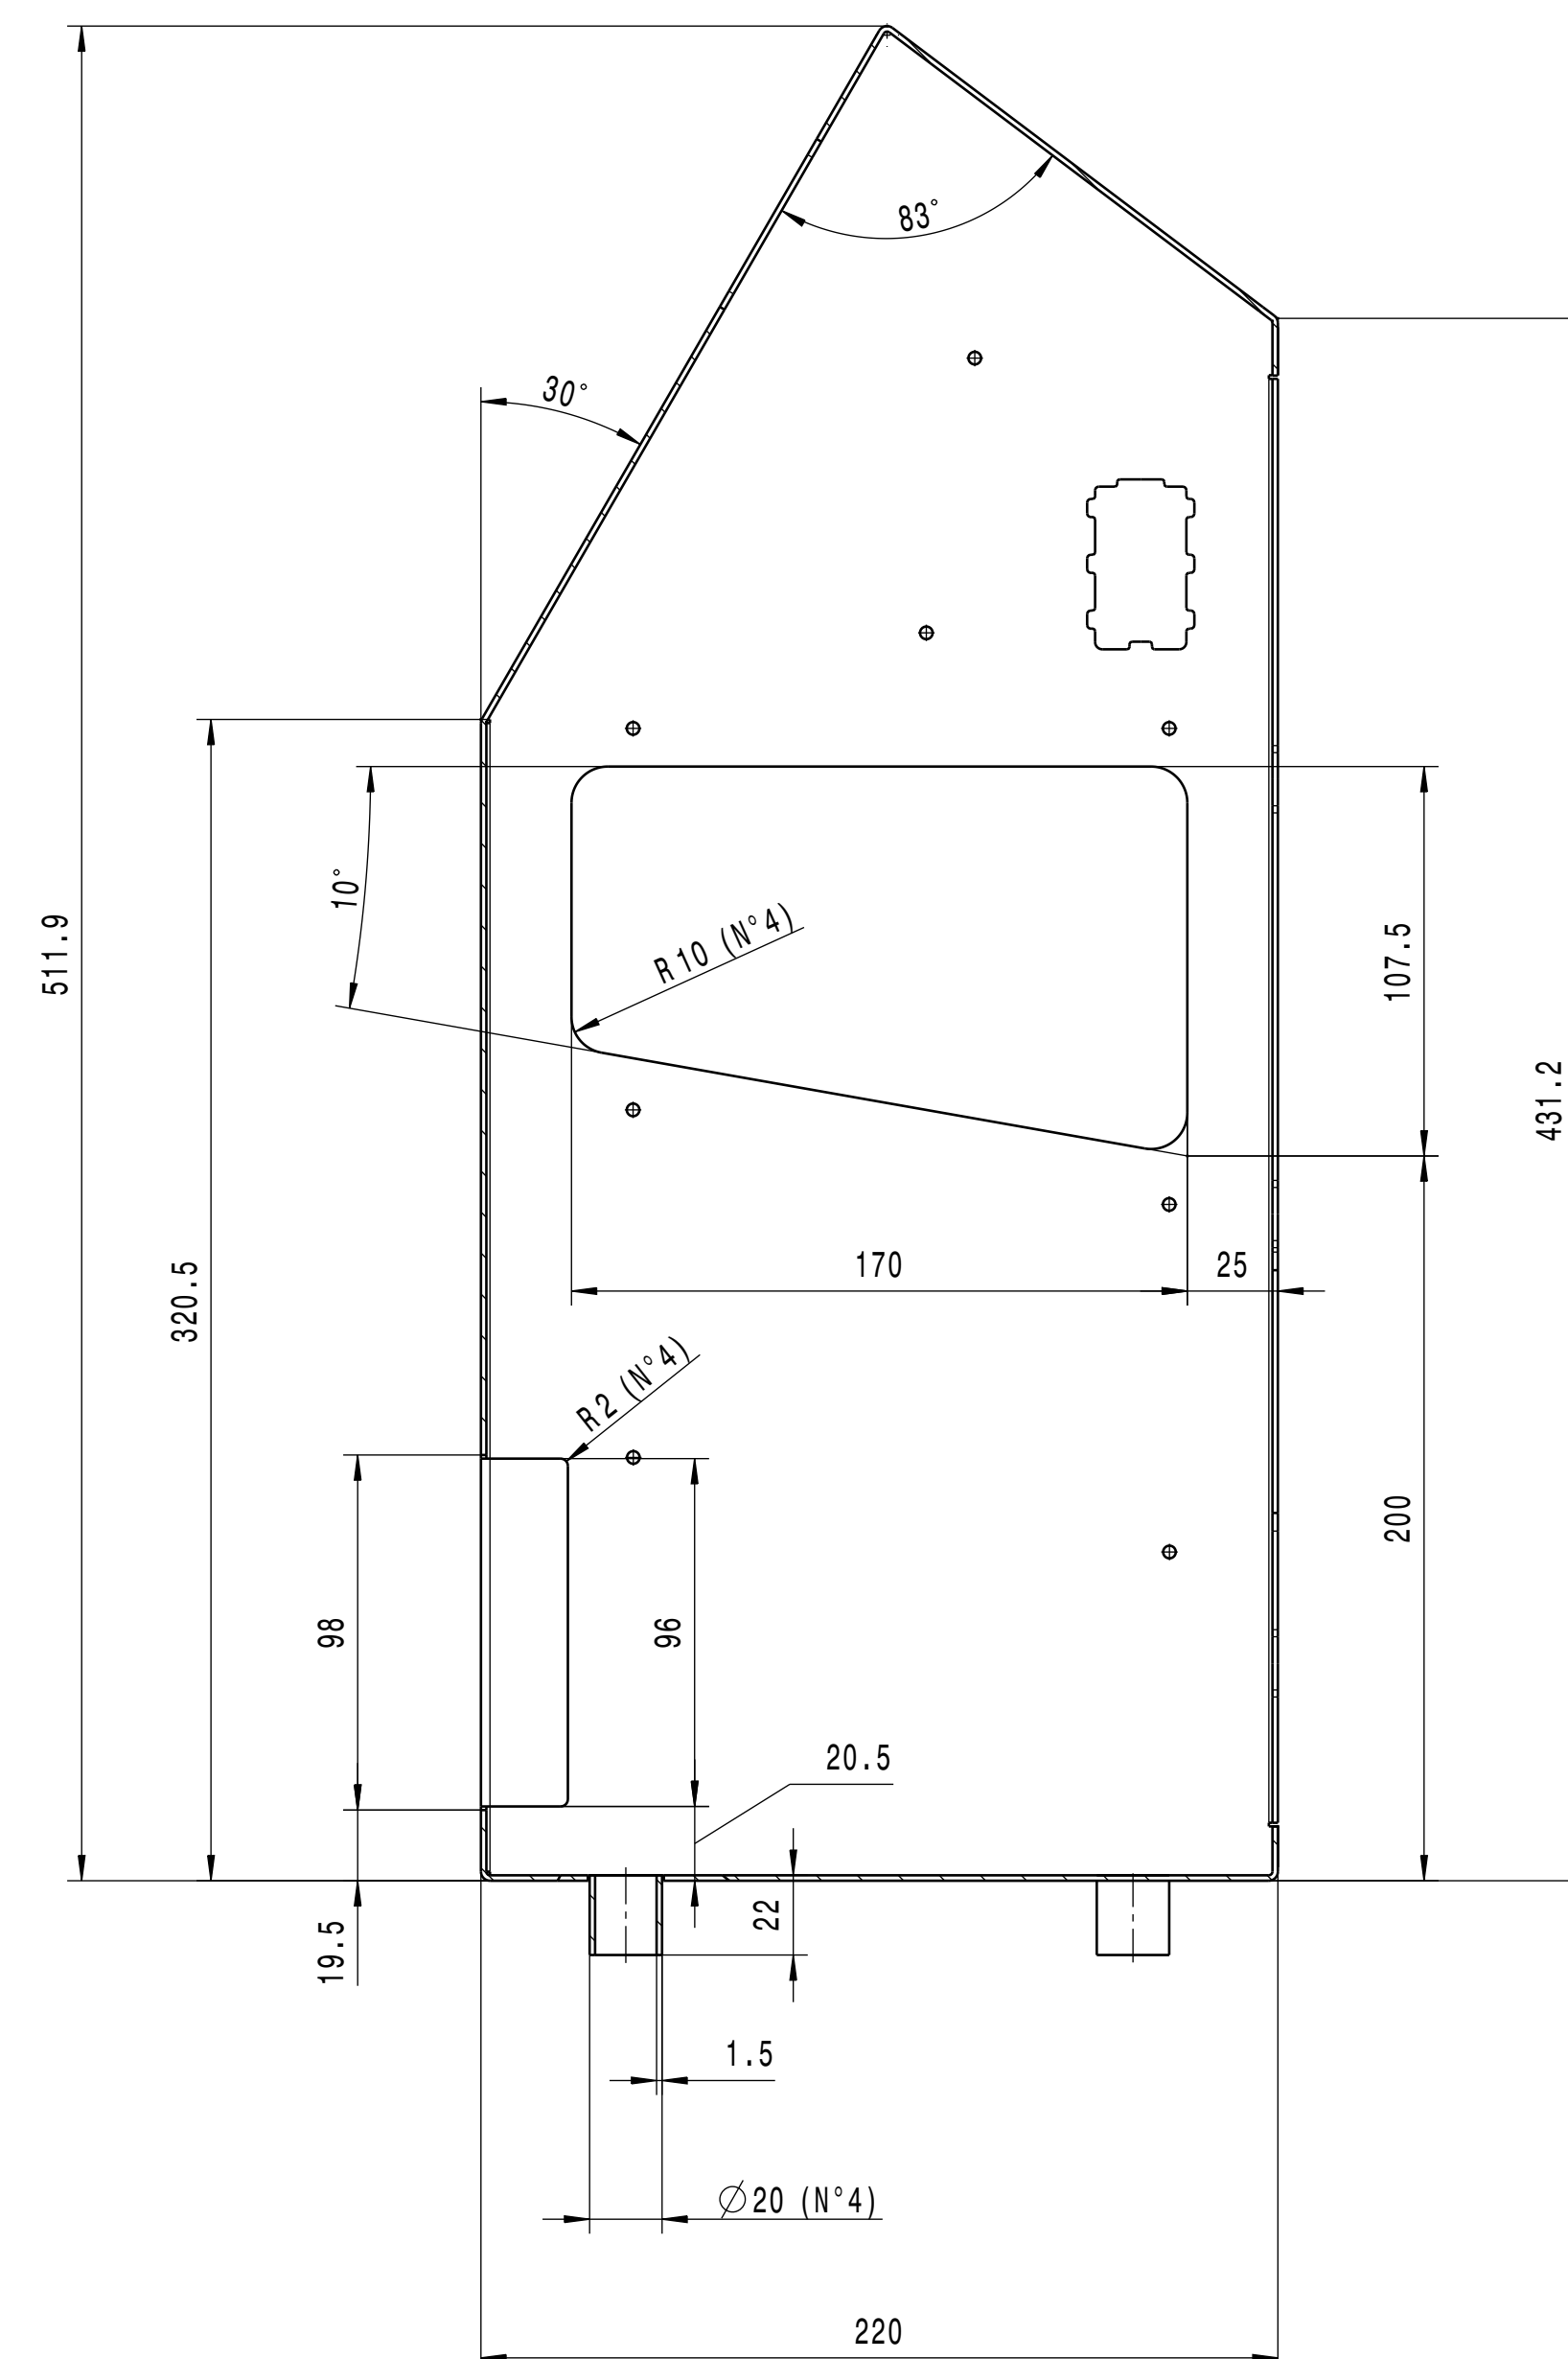
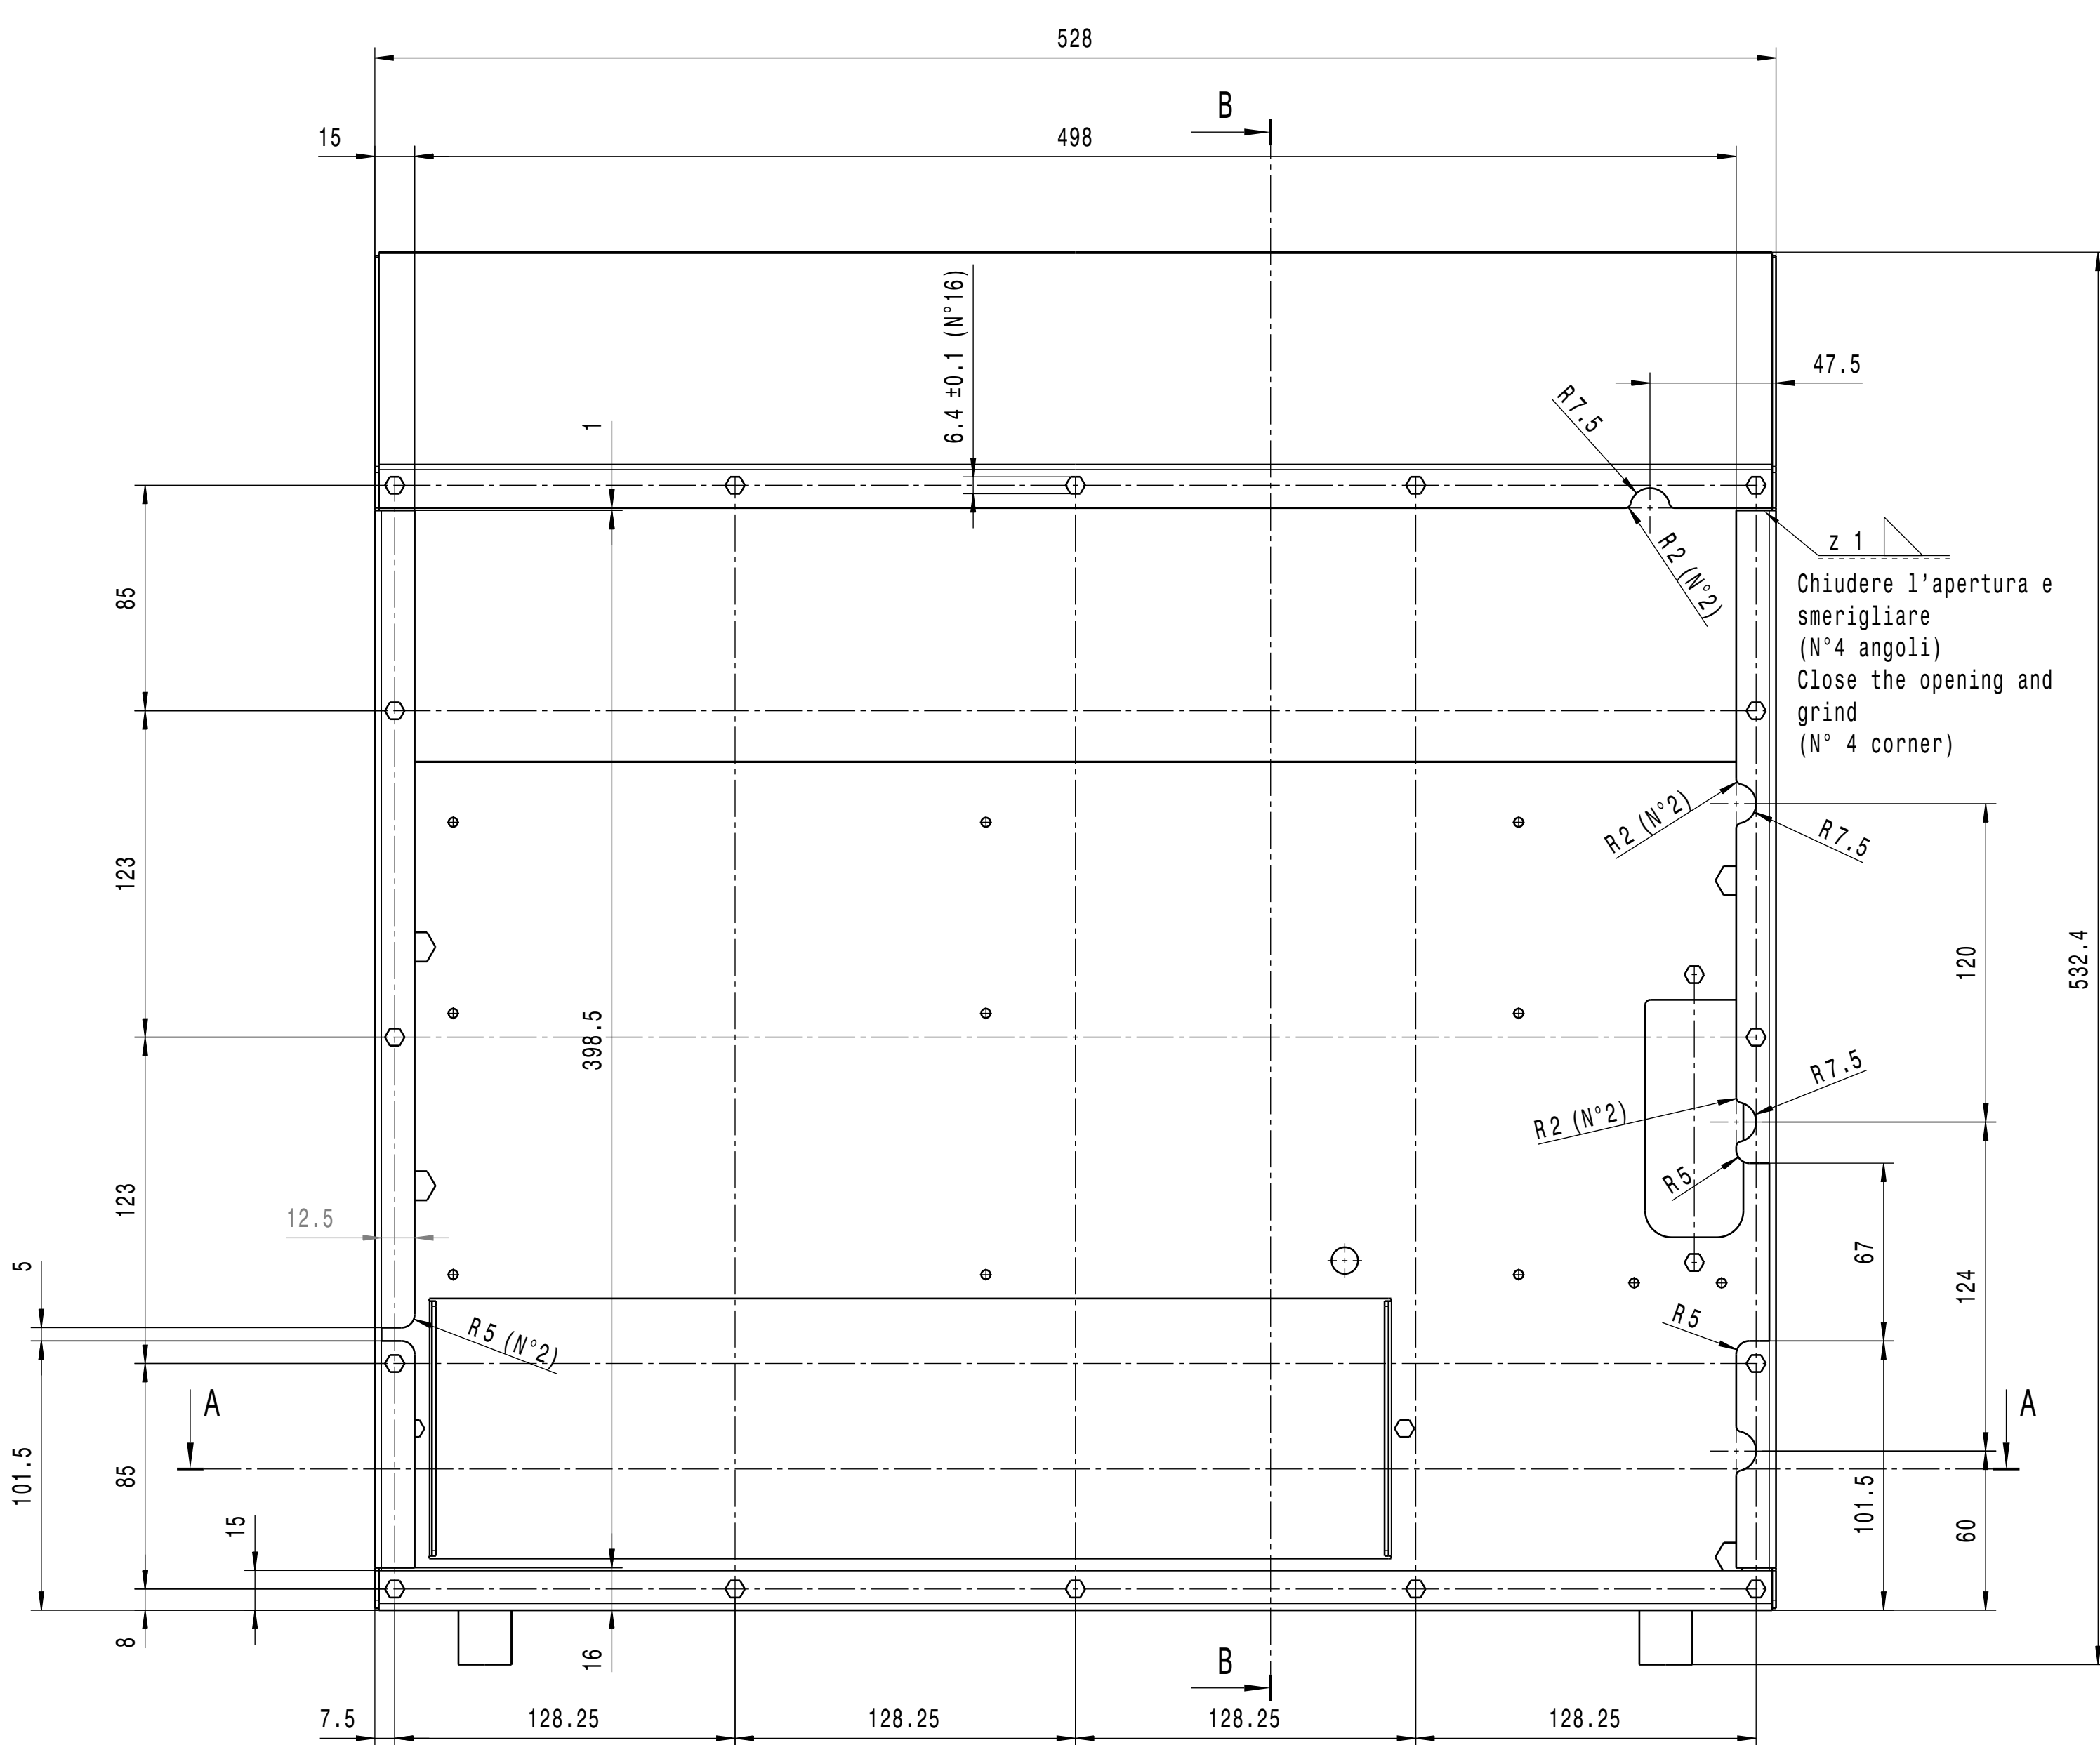
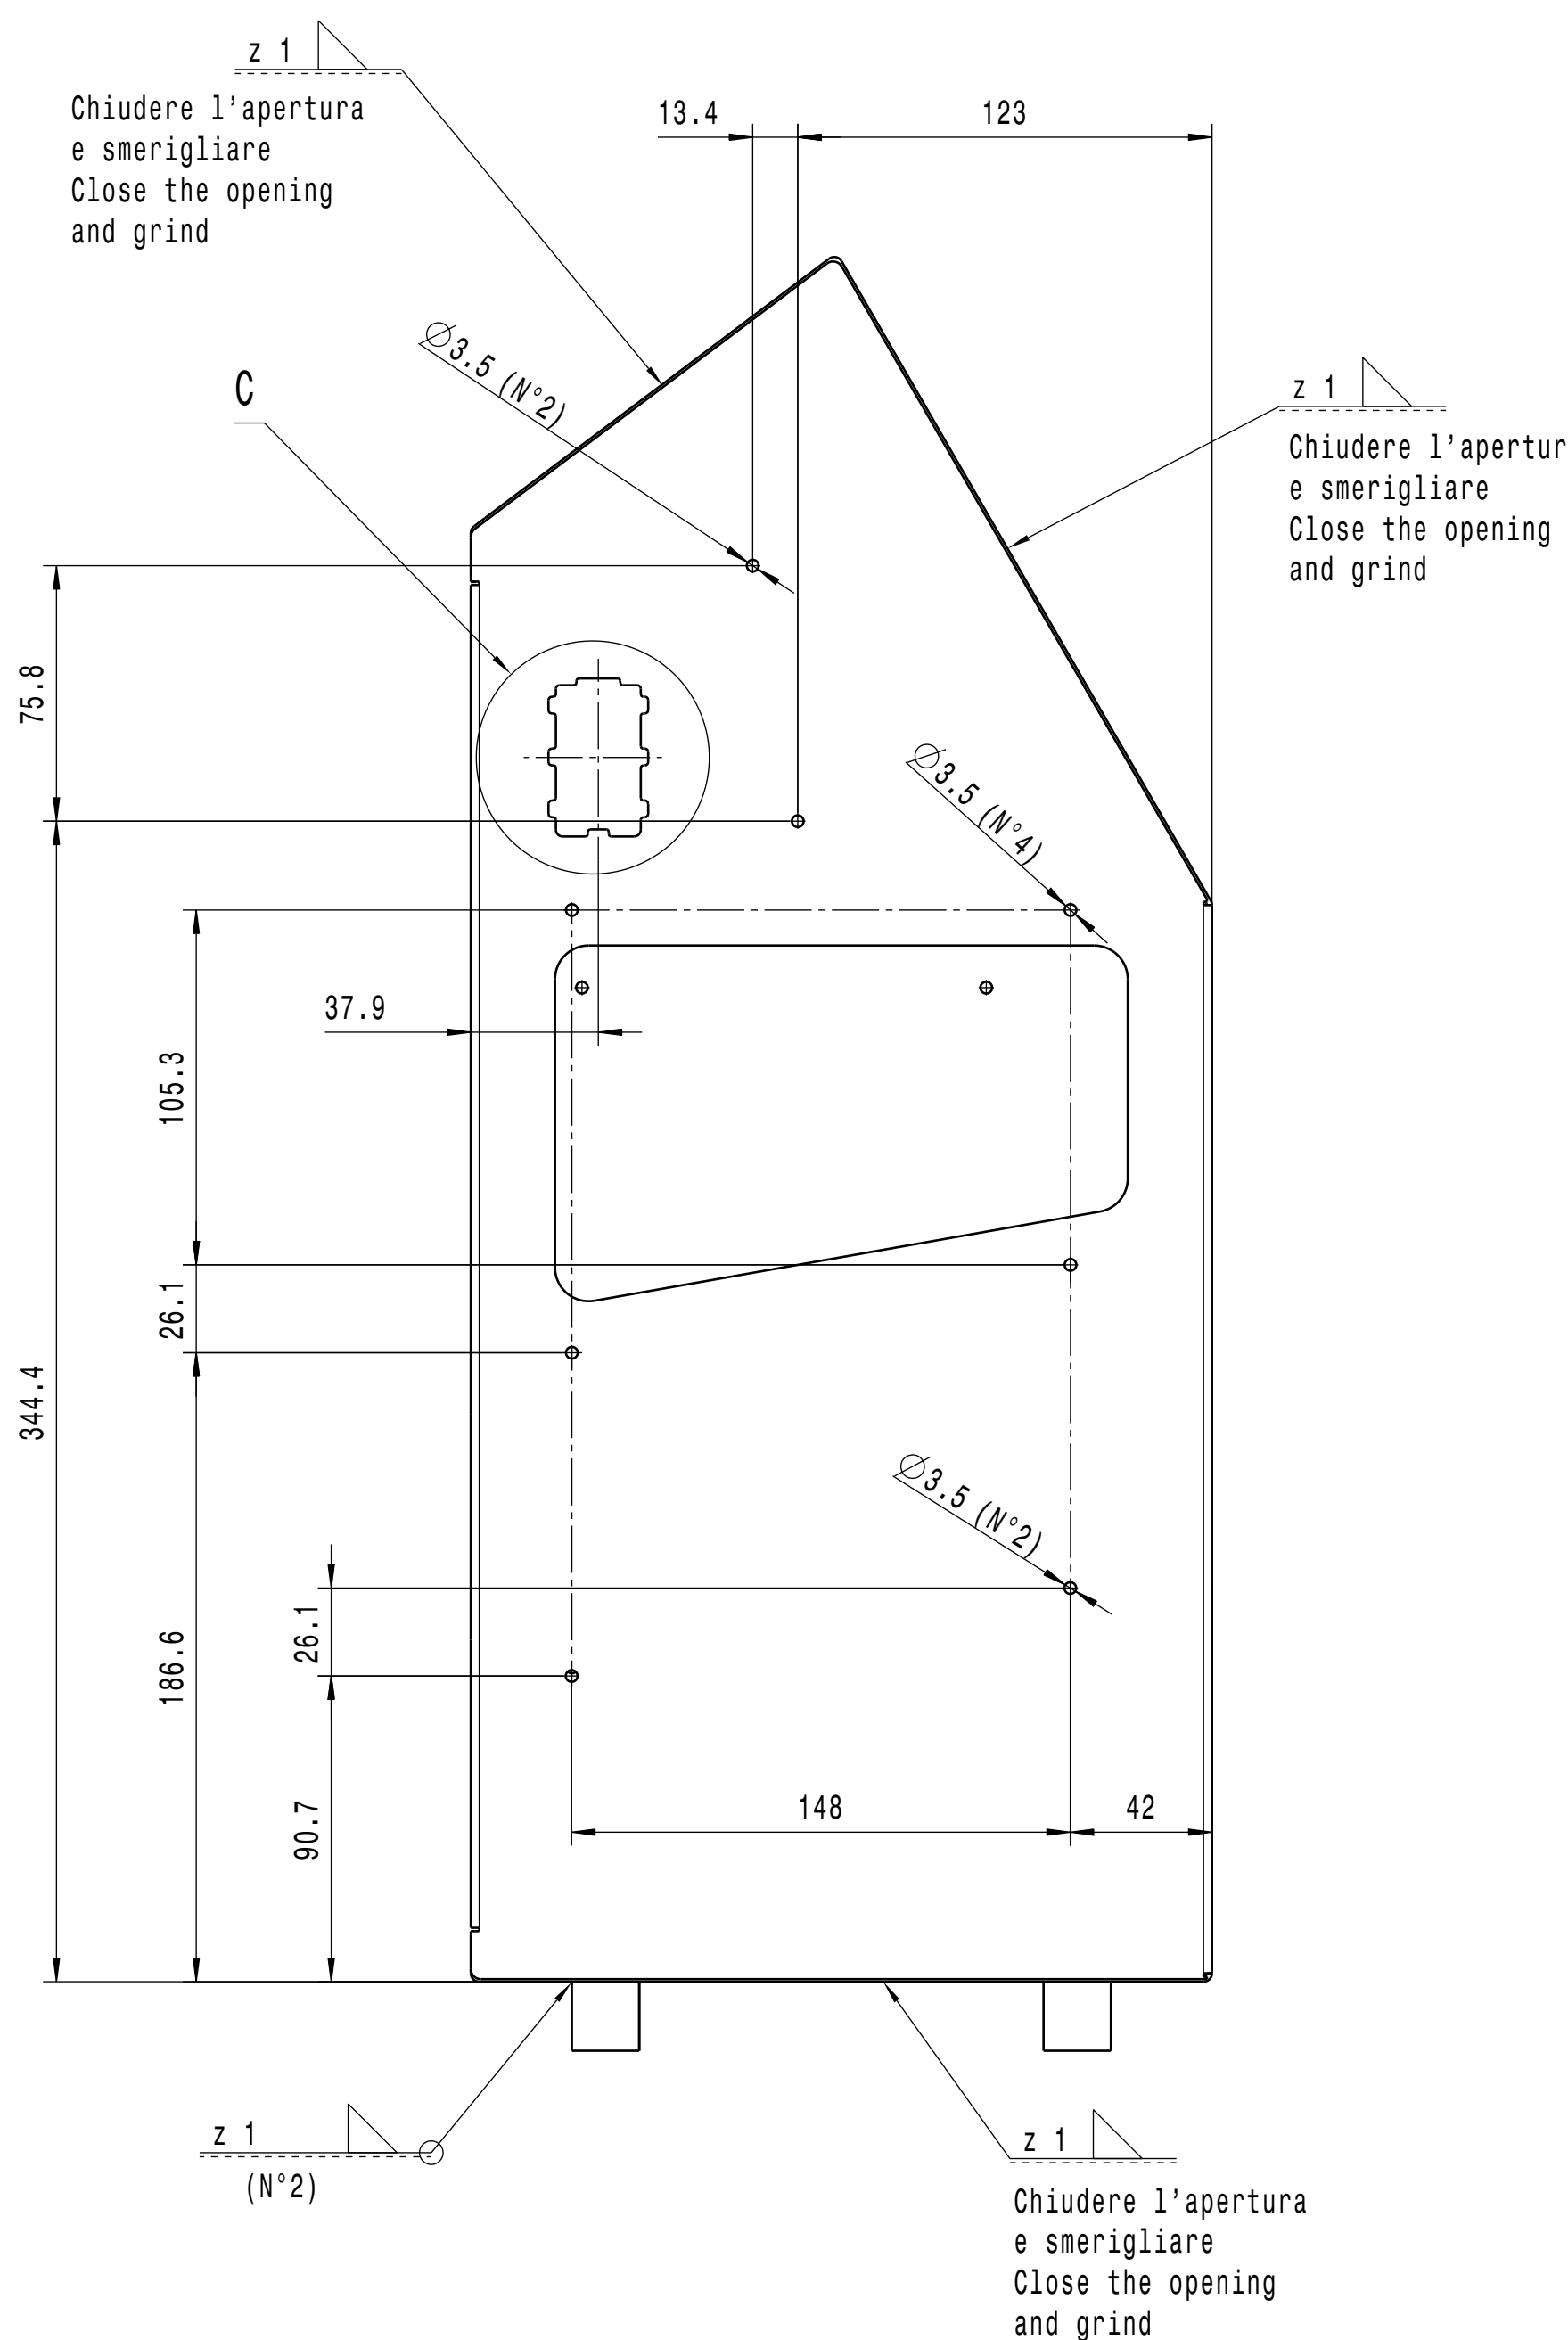
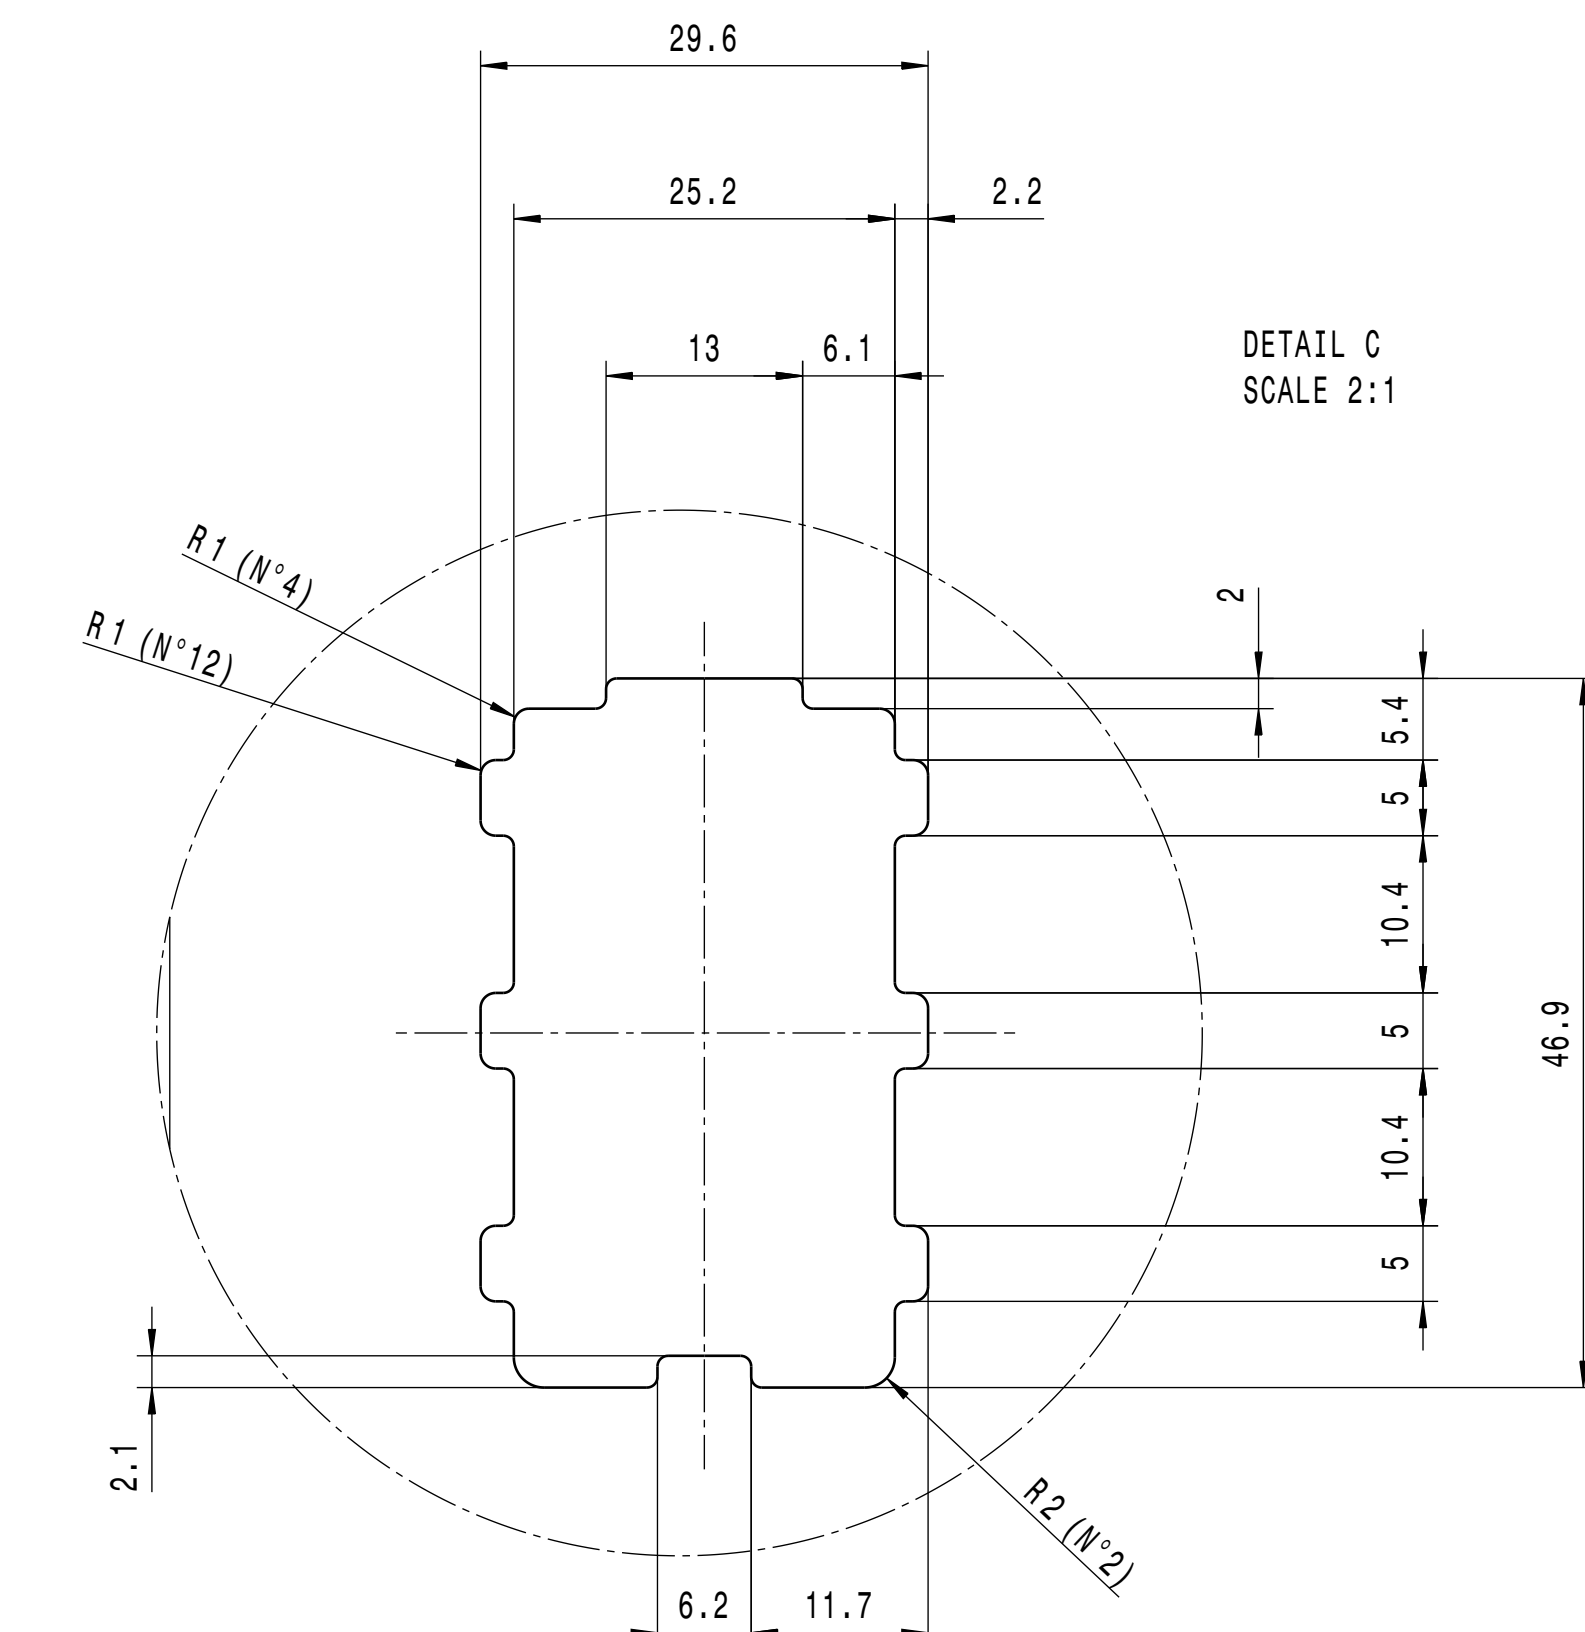
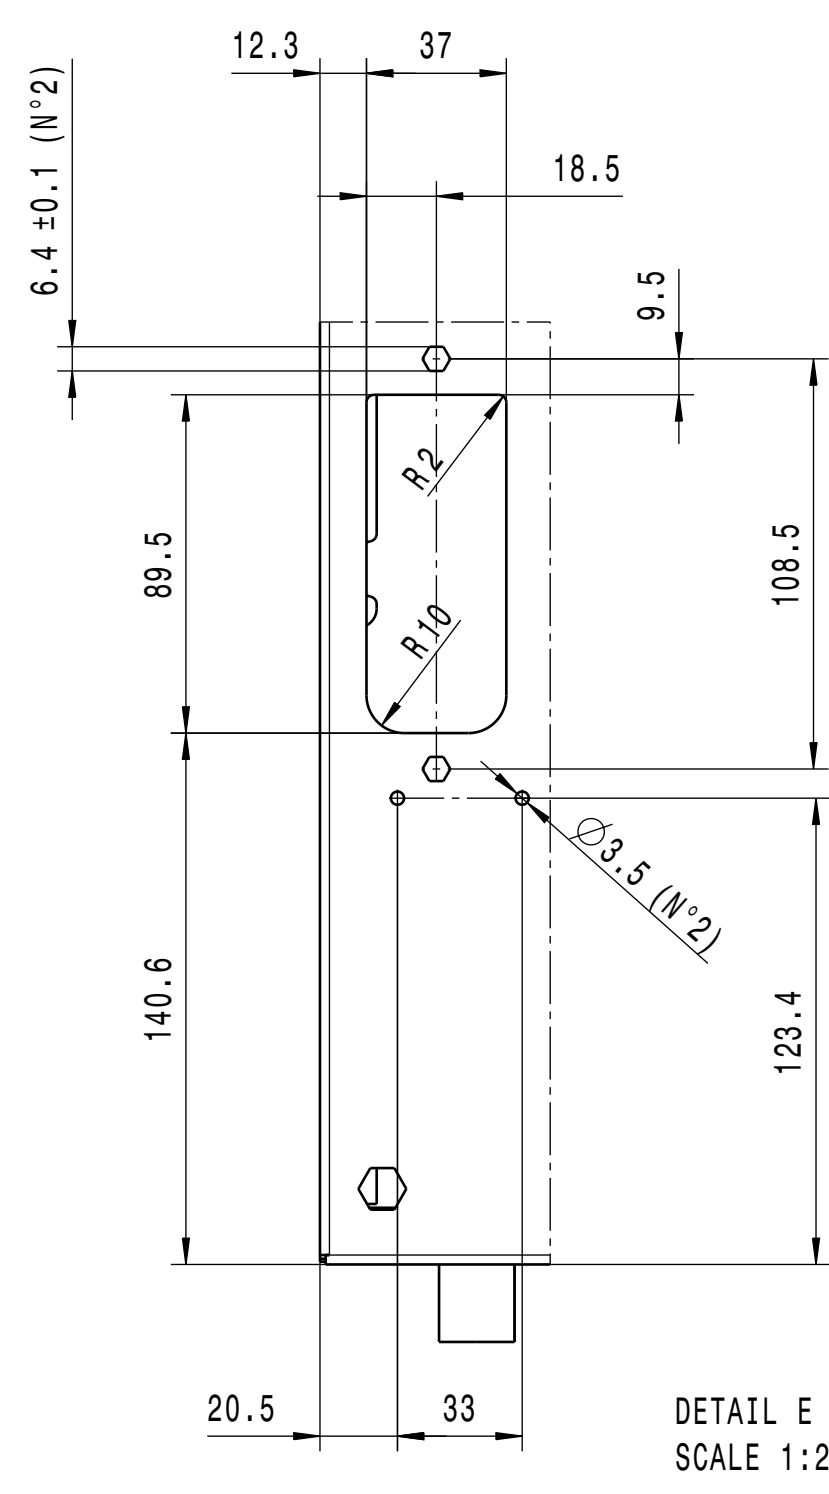


[illegible]

SECTION VIEW B-B
SCALE 1:2

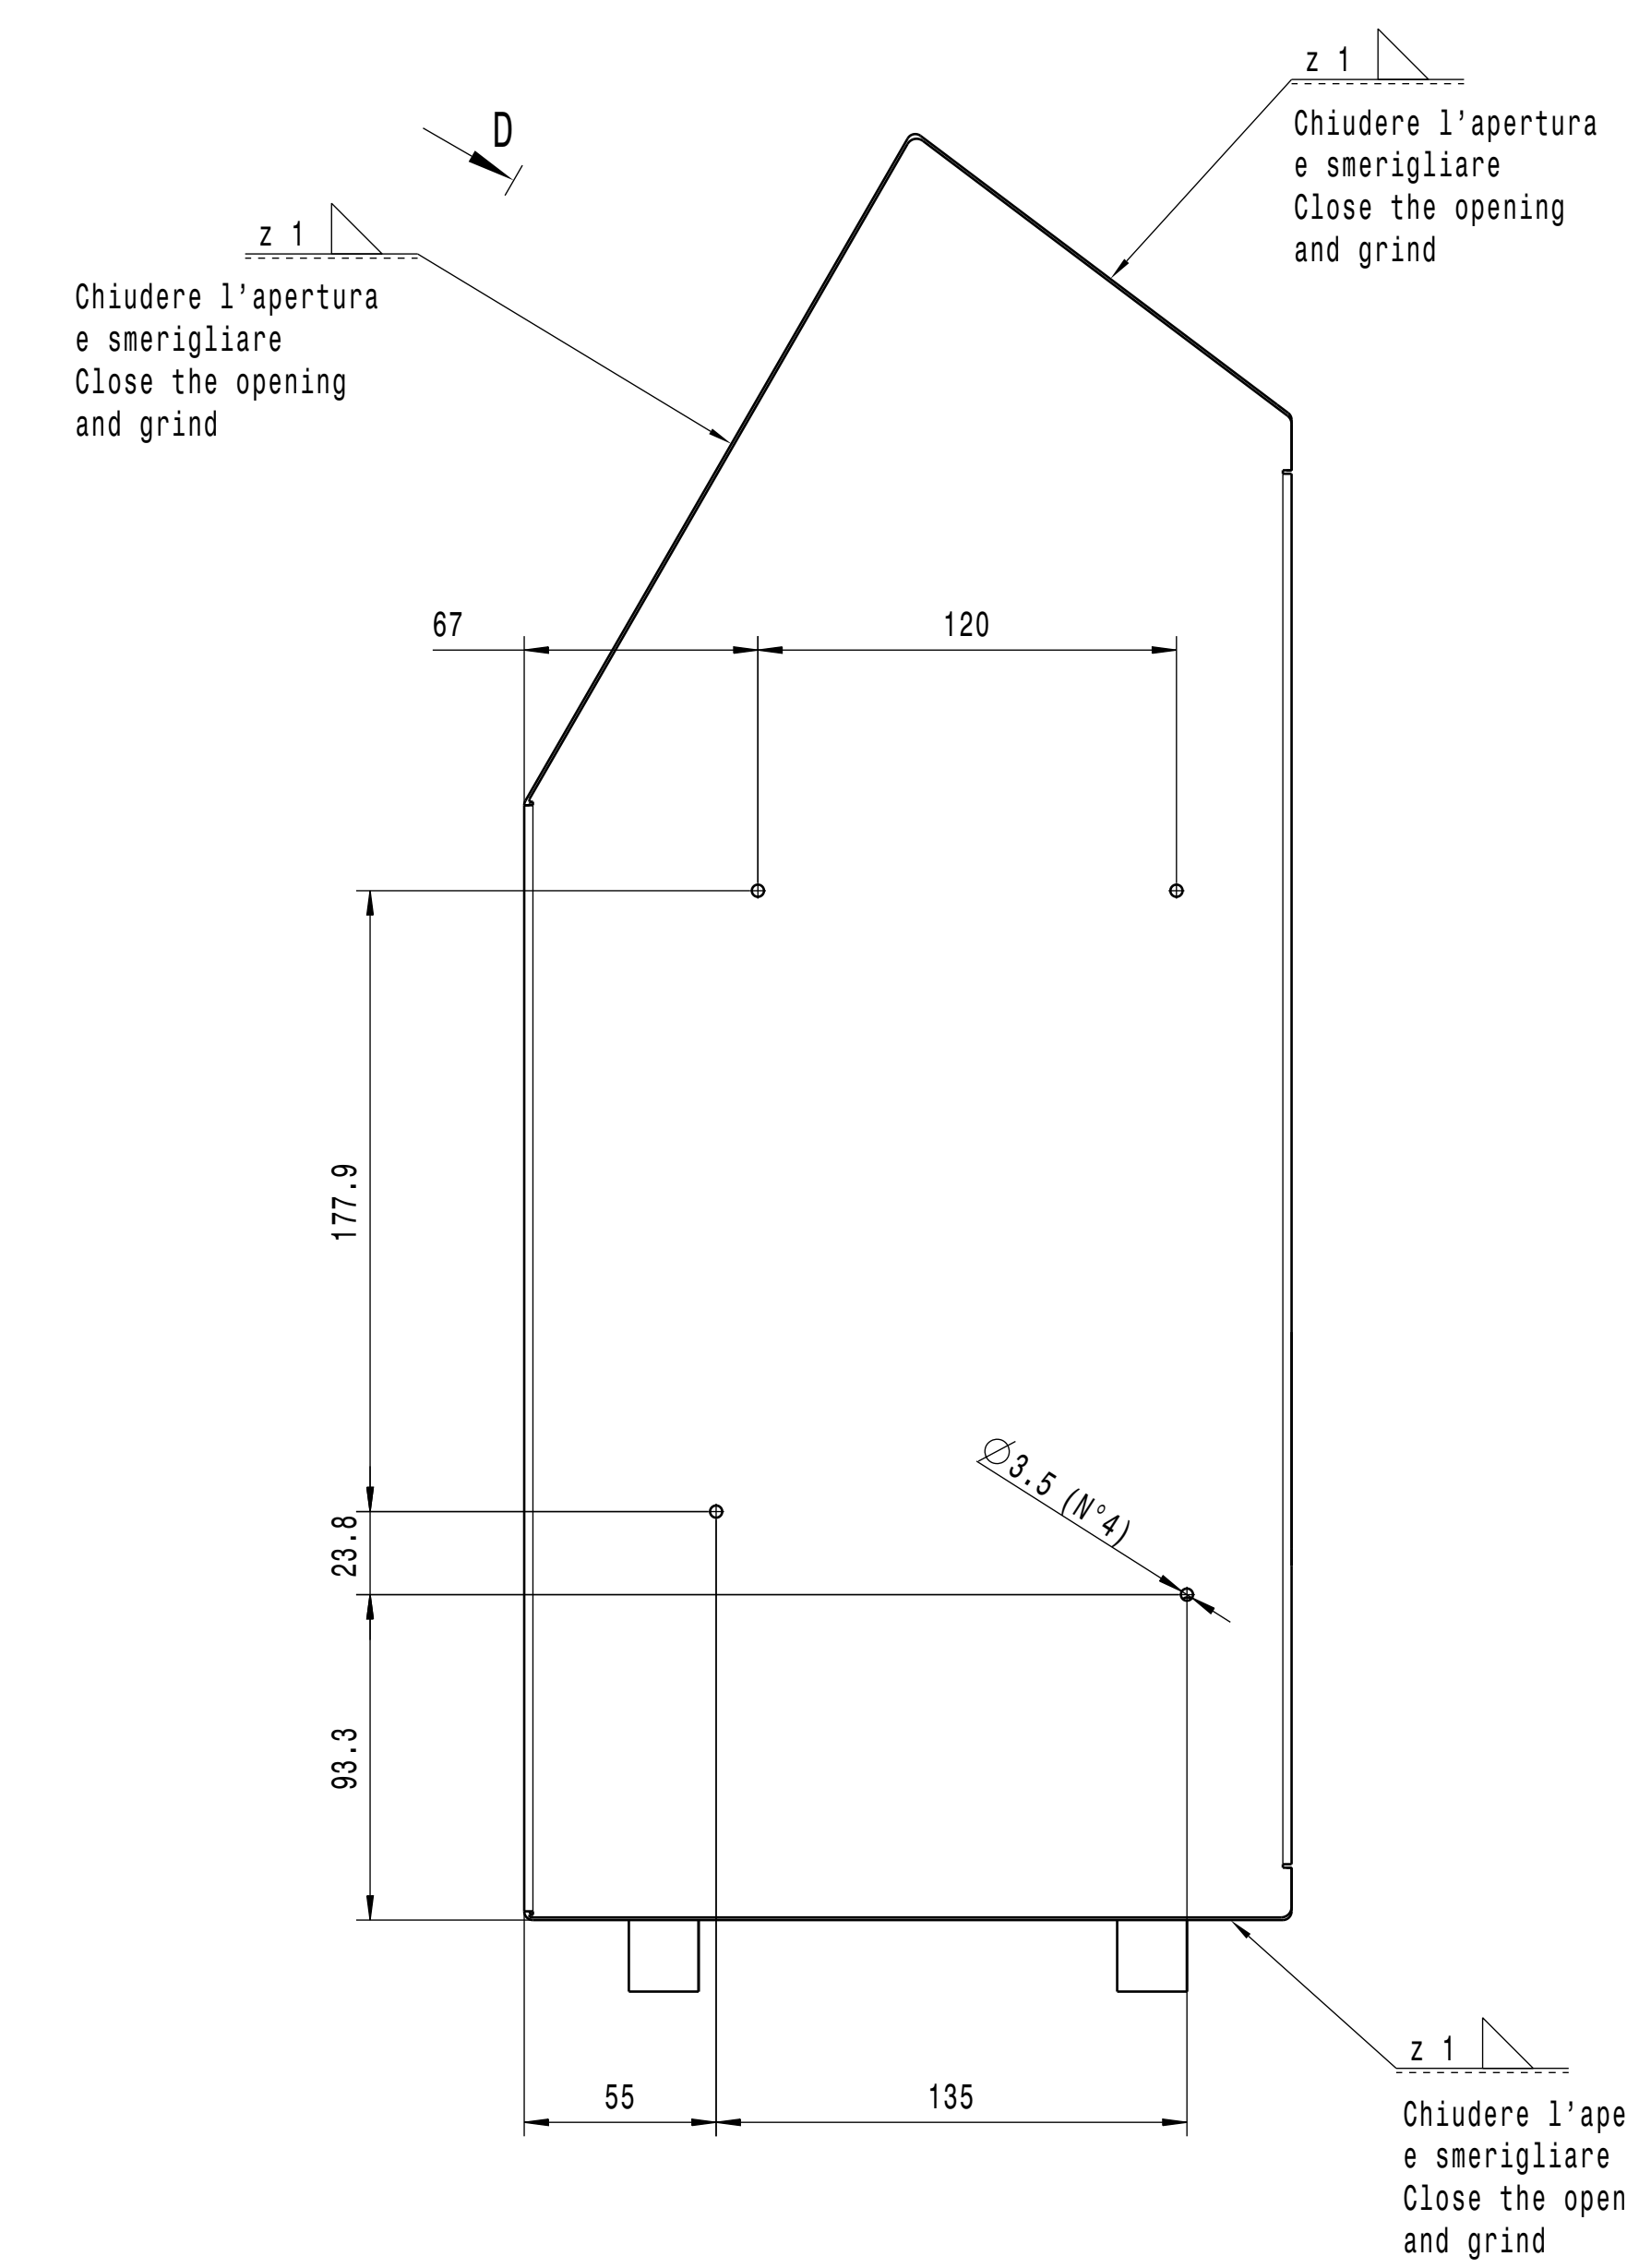

DETAIL E
SCALE 1:2

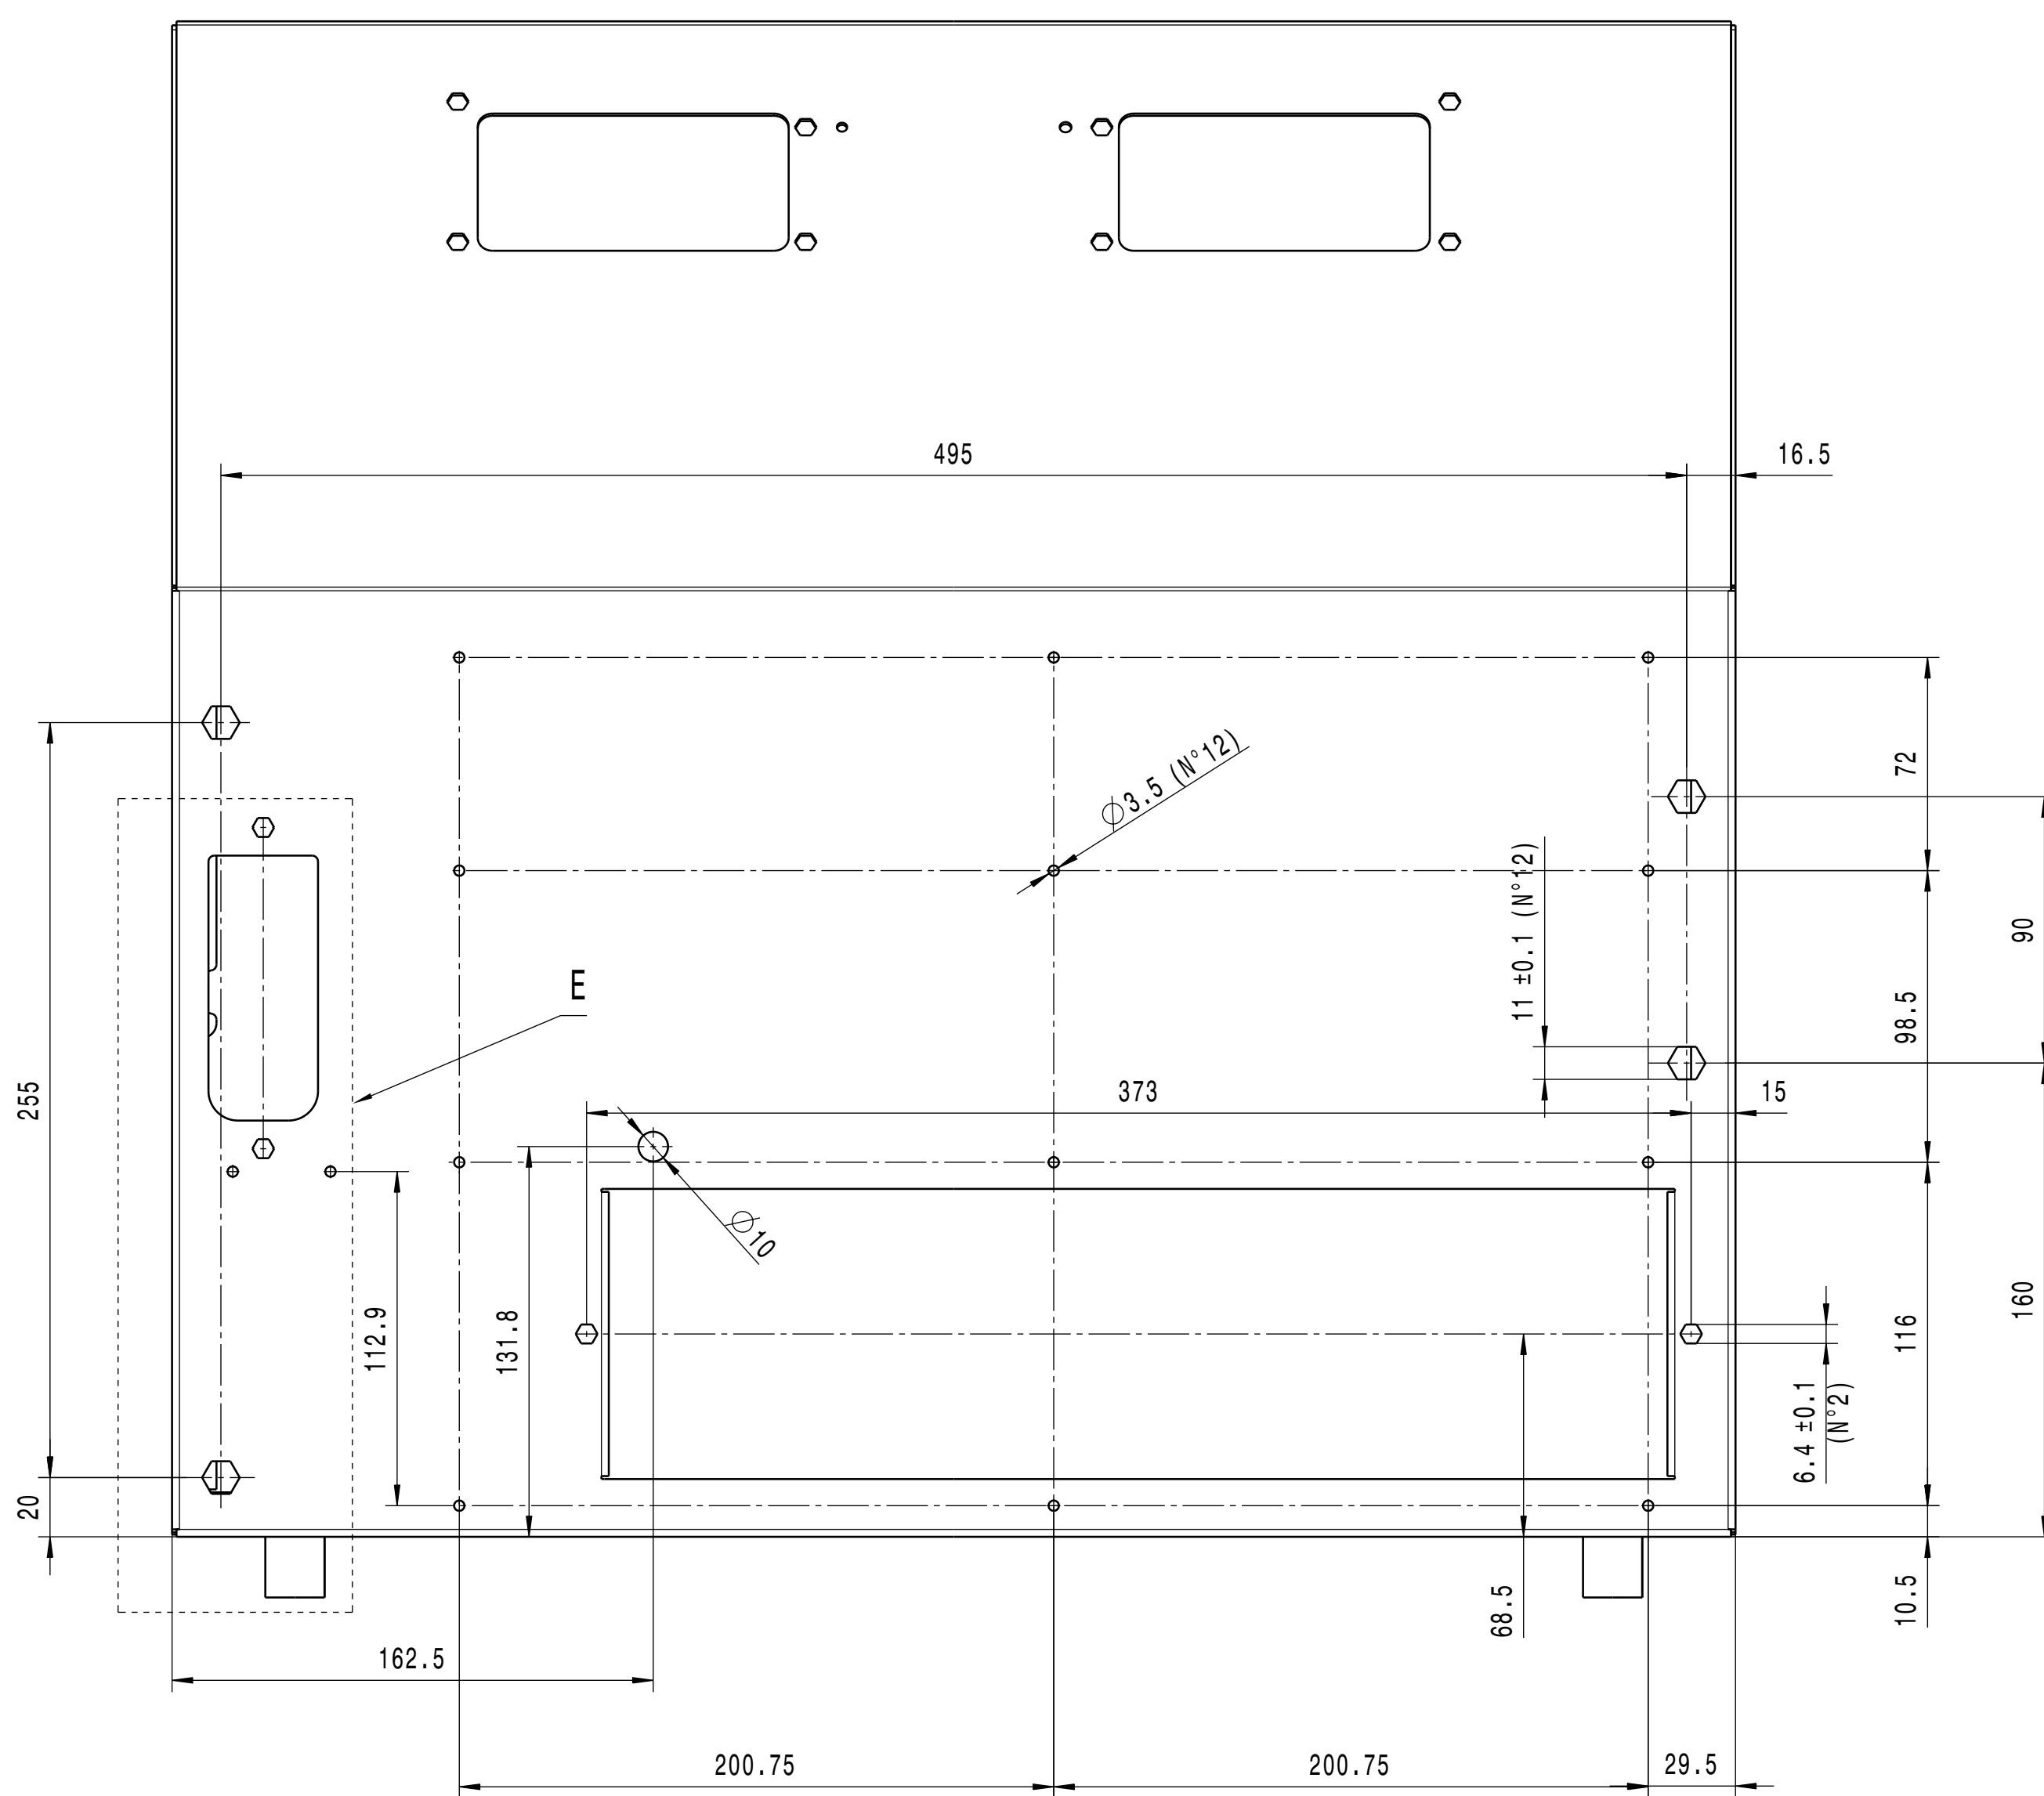

General notes:
Eliminate cutting edges
Perform sheet metal cutting in nitrogen
Note generali:
Eliminare bordi taglienti
Eseguire taglio lamiera in azoto


Surface preparation:
The component to be painted must be superficially cleaned to remove any traces of grease, oxidation and anything that may prevent a good adhesion of the paint film.

Preparazione delle superfici:
Il componente da verniciare deve essere sottoposto ad una pulizia superficiale per eliminare eventuali tracce di grasso, ossidazione e tutto quanto possa impedire una buona adesione del film di vernice.


Type of painting:
Cataphoresis with a thickness of 20 + 35 micron
Tipo di verniciatura:
Cataforesi con spessore di 20 + 35 micron.

Salt spray resistance:
Cross engraving and 300 h exposure according to UNI ISO 9227
Resistenza in nebbia salina:
Incisione a croce e 300 h di esposizione secondo UNI ISO 9227


Color:
Black RAL 90
Colore:
Nero RAL 900

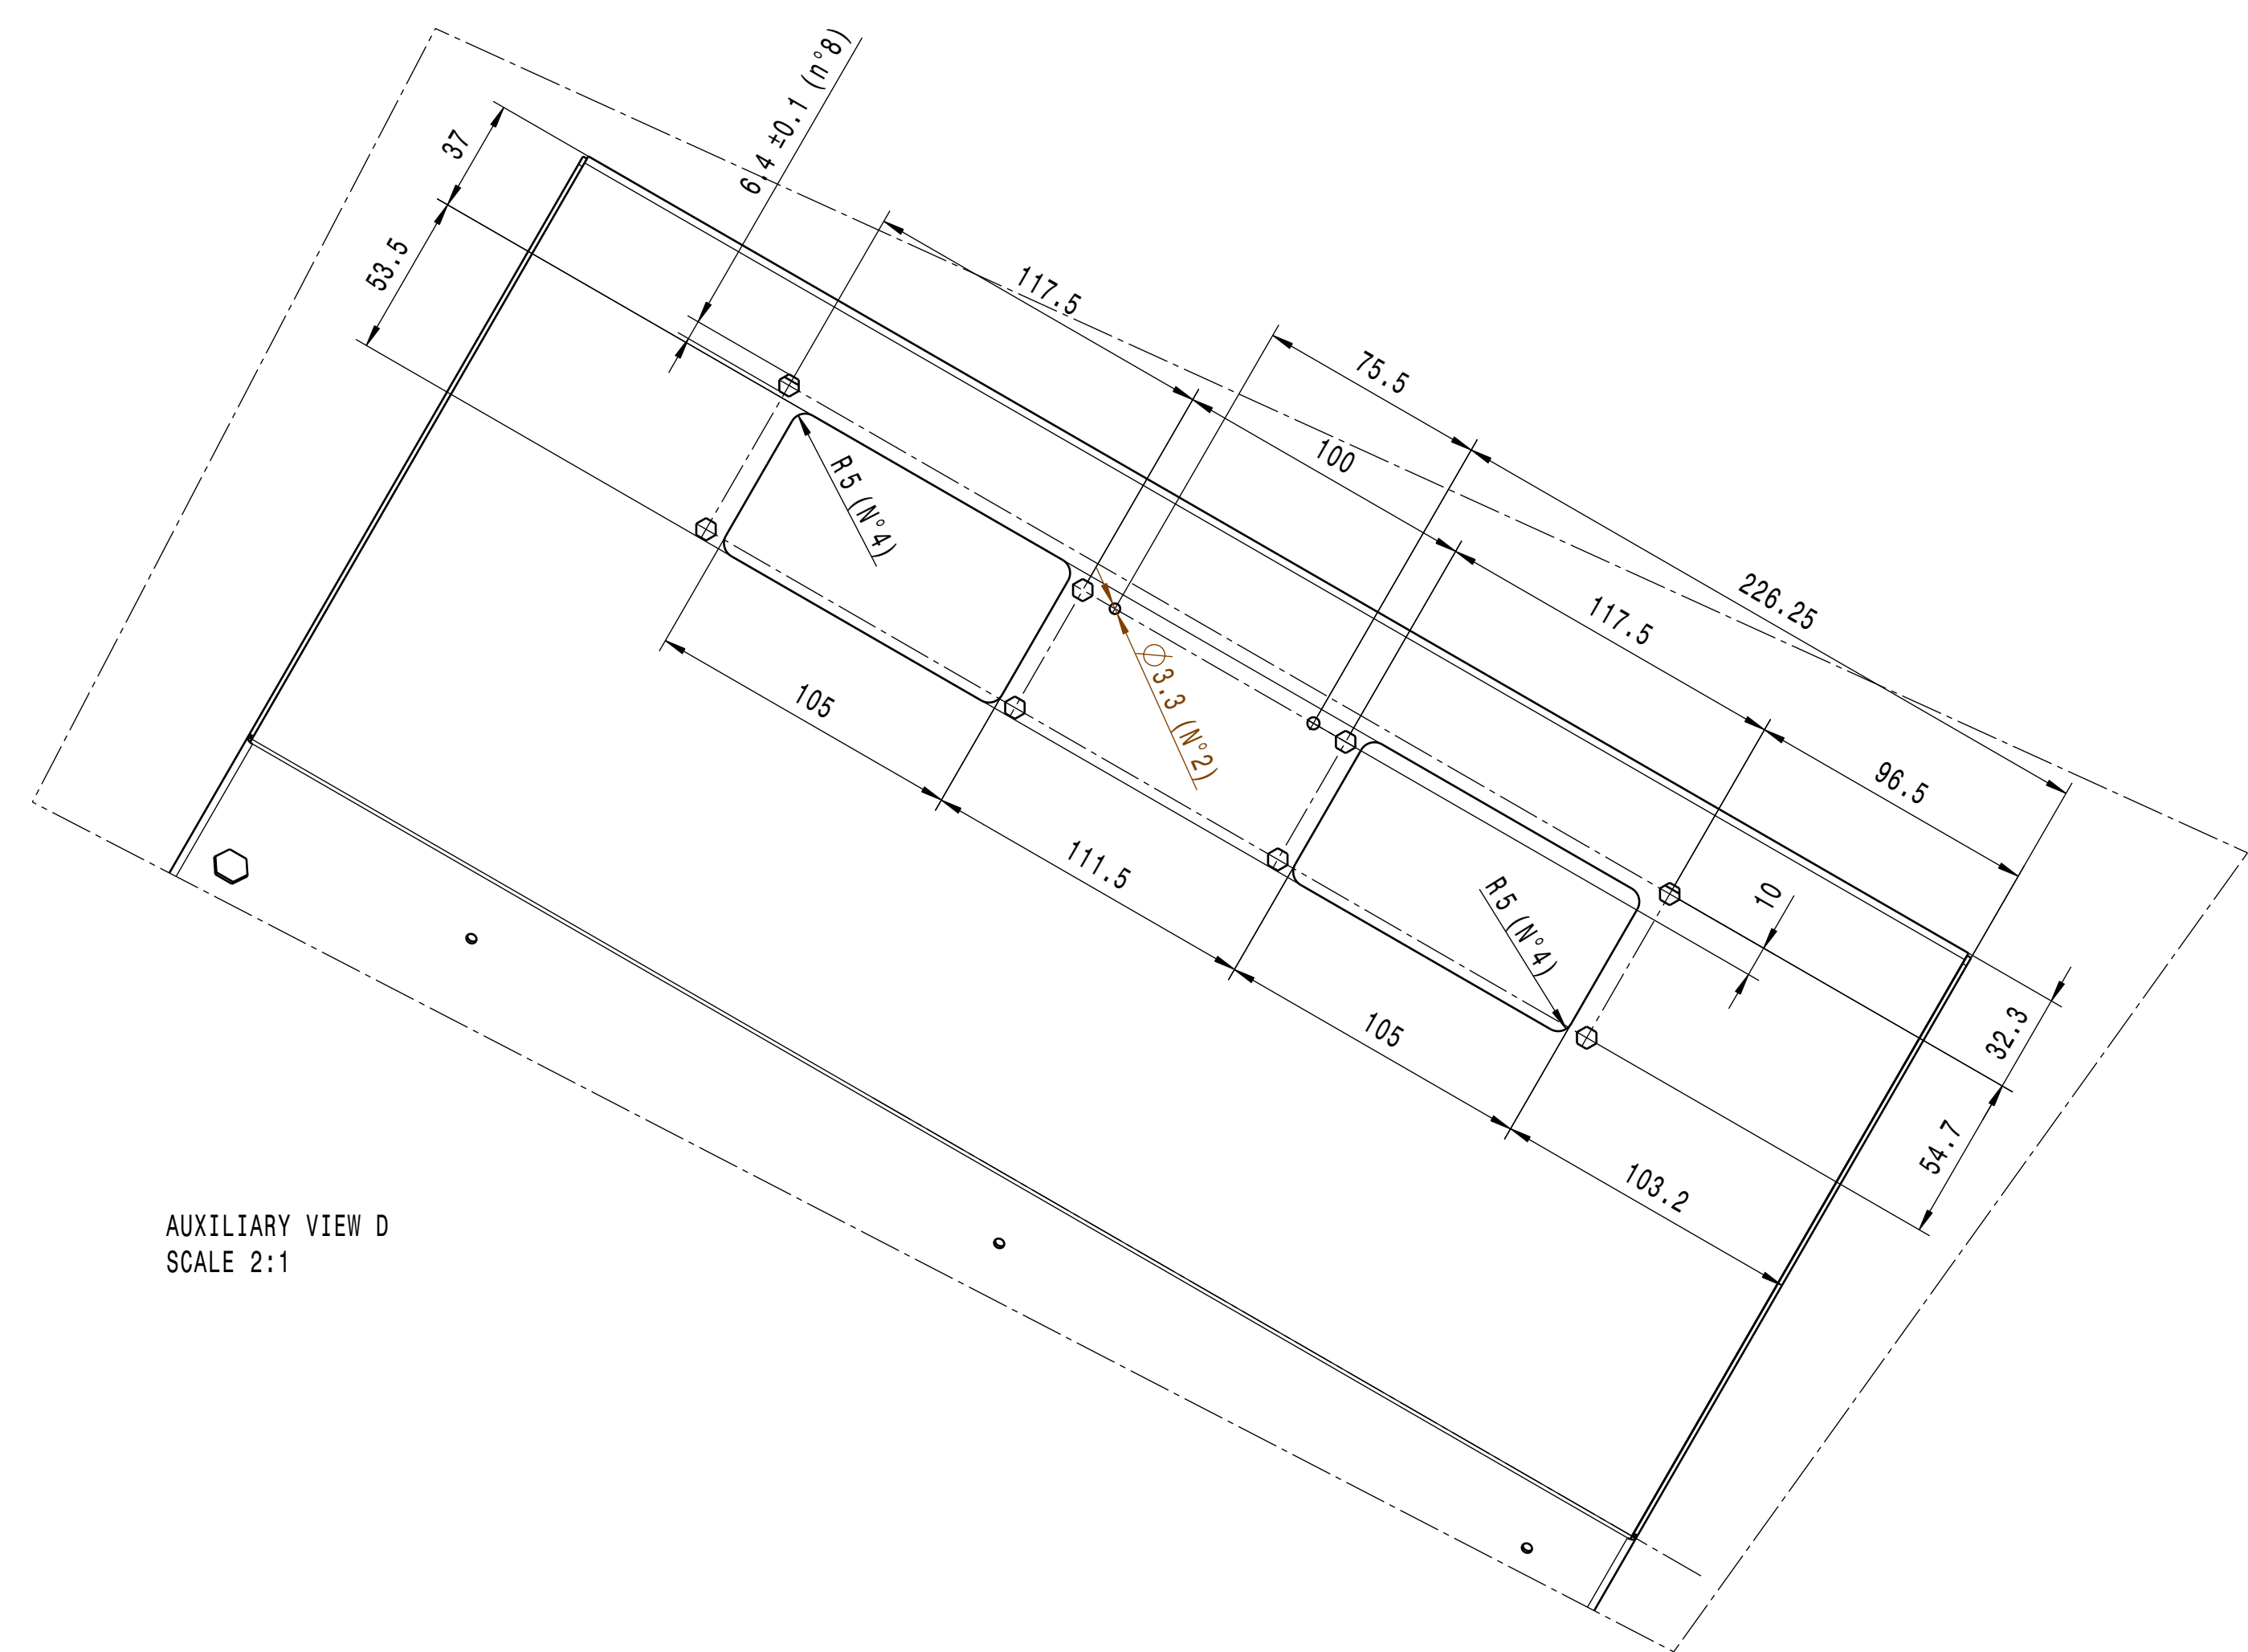


AUXILIARY VIEW C
SCALE 2:1

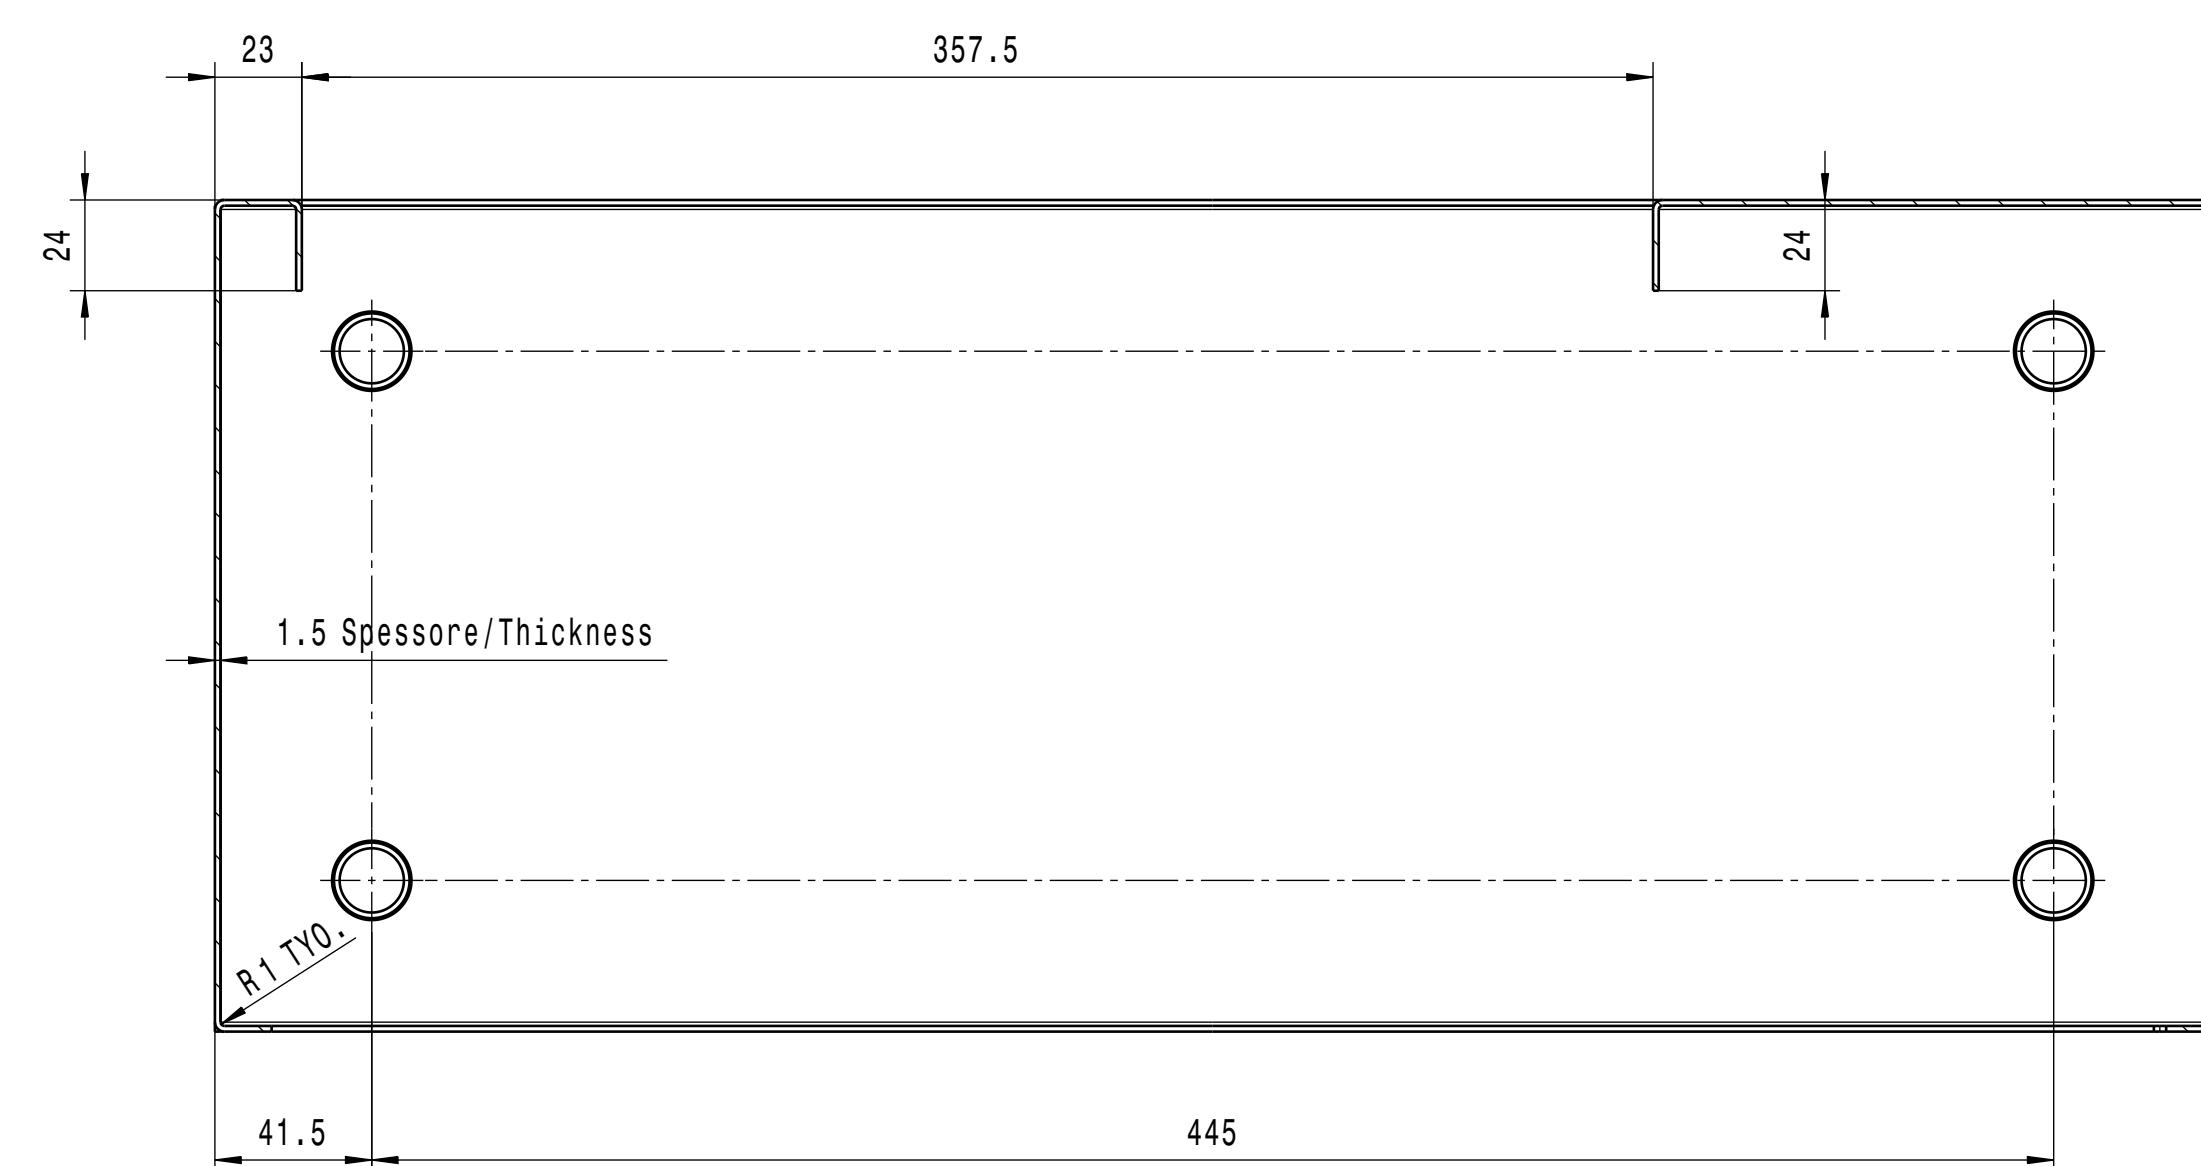

SECTION VI
SCALE 1:2

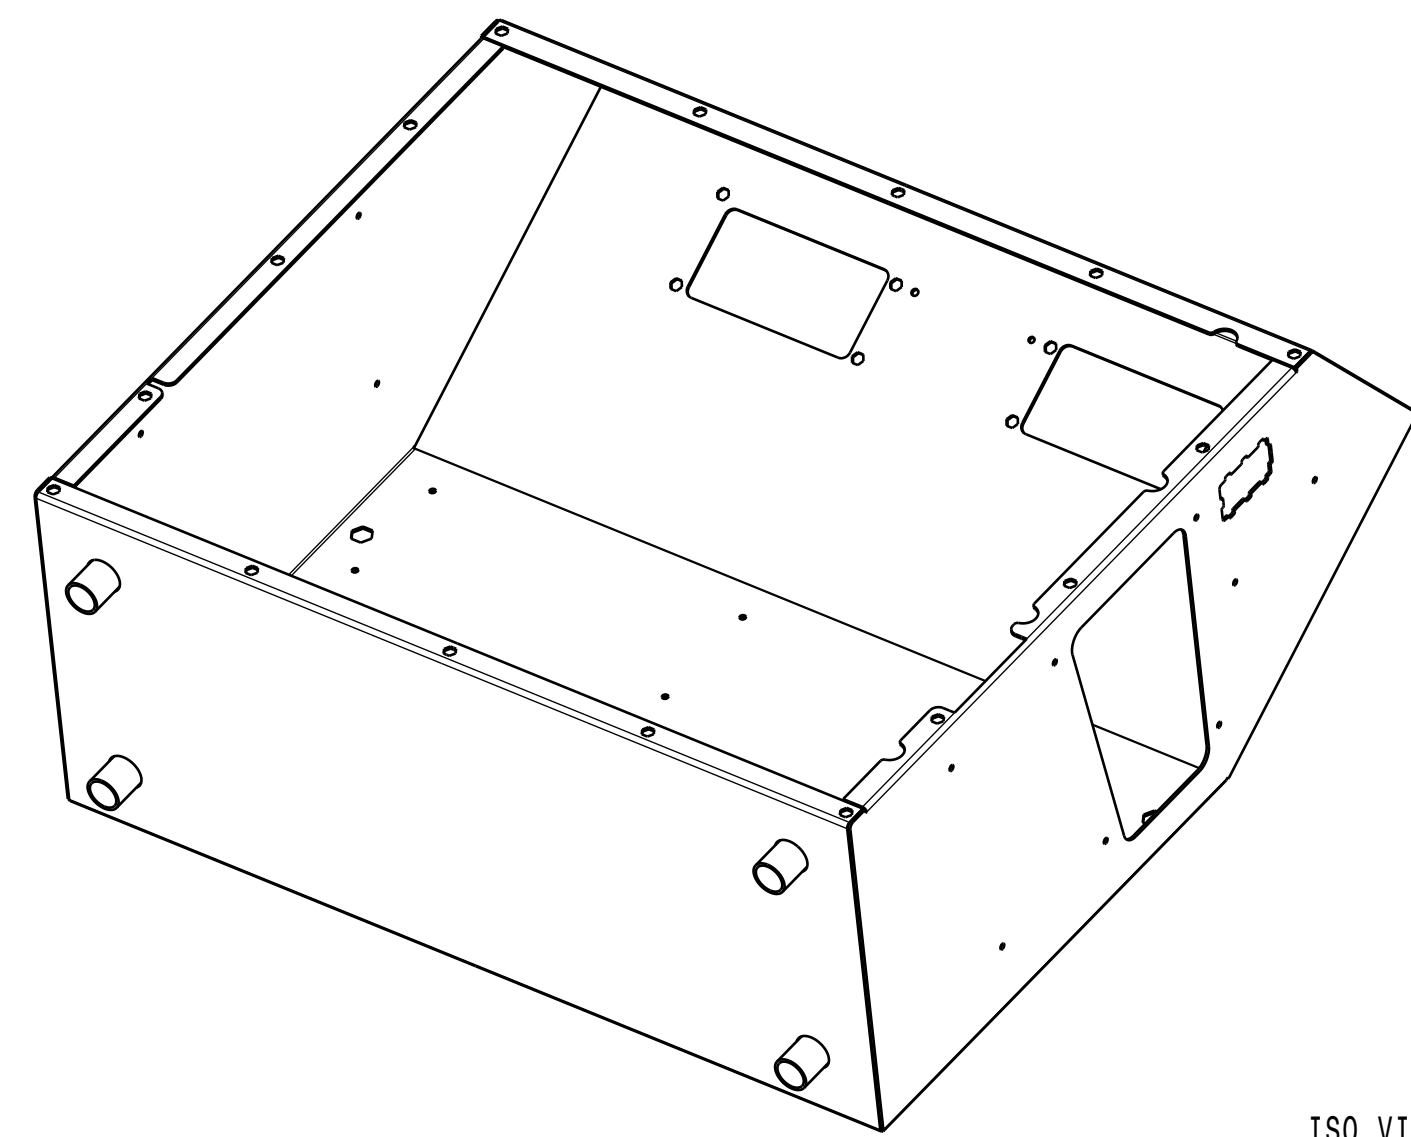

ISO VIEW
SCALE 1:4

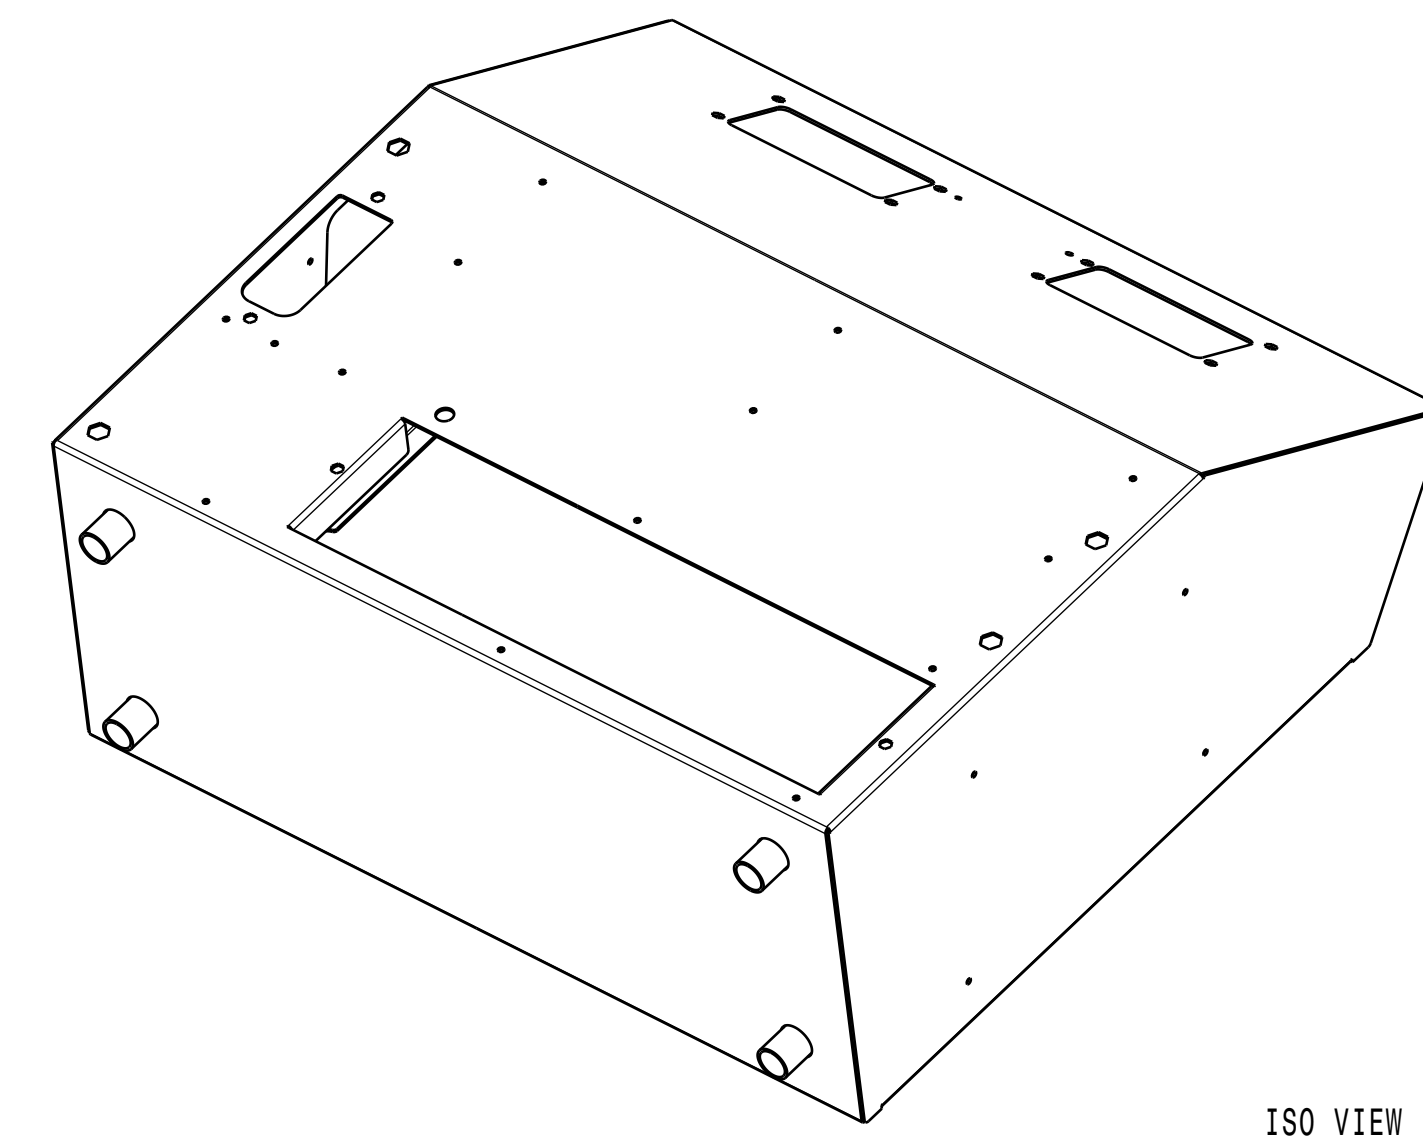

ISO VIEW
SCALE 1:4

☐ ENGLISH LANGUAGE IS BINDING

☒ ITALIAN LANGUAGE IS BINDING

- COMPLIES WITH DIRECTIVE 2000/53/EC
IN THE MOST RECENT AMENDMENT.
EXEMPTIONS ACCORDING TO ANNEX II ARE NOT PERMITTED.
- Conforme alla direttiva 2000/53/EC
nella versione più recente.
Non sono ammesse le esenzioni secondo l'allegato II.

FOR MISSING DIMENSIONS SEE CAD-DATA SET
Per le dimensioni non quotate fare riferimento al modello CAD