




Original format size A2

Section view B-B

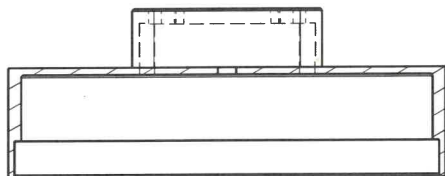


Isometric view
Scale: 1:1





Isometric view
Scale: 1:1

23
15
14

5

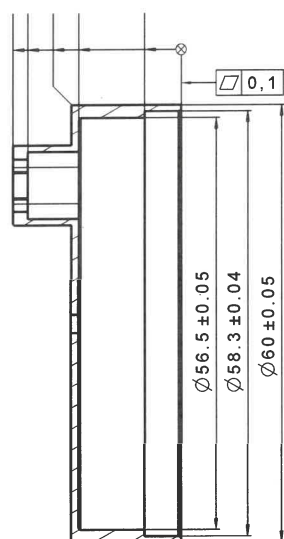


Section view A-A

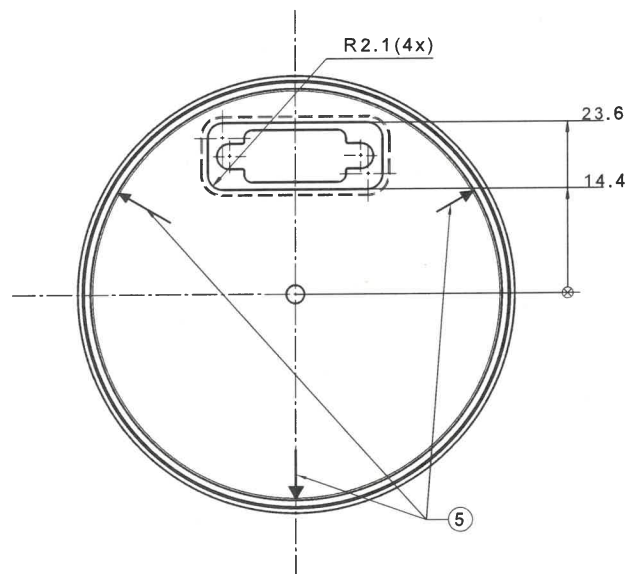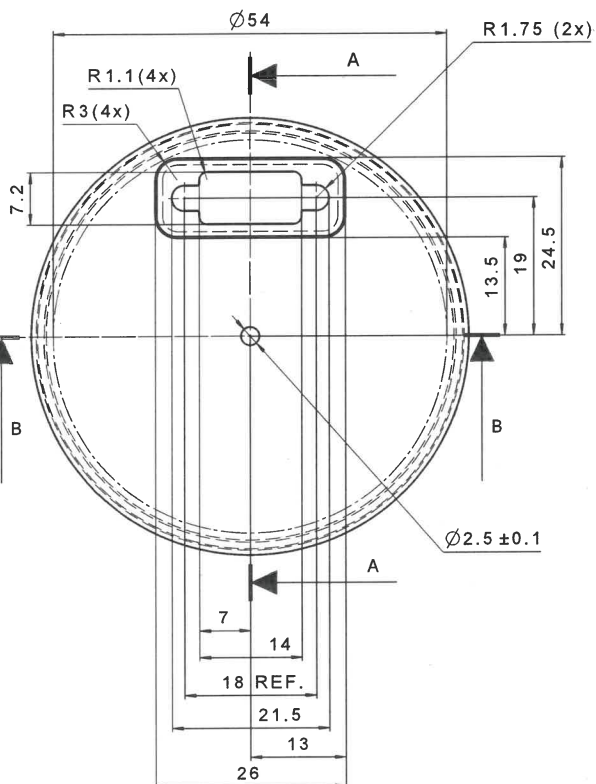

NOTES:

- 1 MATERIAL: ALUMINIUM EN-AW 6082-T651.
- 2 SURFACE TREATMENT: ANODIZING IN SULPHURIC ACID PER MIL-A-8625 TYPE II CLASS 1, NON-DYED COATING. ALTERNATIVE ISO 8078 UNDYED COATING.
- 3 SURFACES WITHOUT ANODIZING THROUGH MASKING OR MACHINING. SURFACE TREATMENT (Trivalent Chromium Pretreatment). IN ACCORDANCE WITH MIL-DTL-5541 TYPE II CLASS 3. REF. TRADEMARKS: Surtec 650 or ChromiAl TCP.
- 4 DIMENSIONS ARE INCLUDING SURFACE TREATMENT, NOT GIVEN DIMENSIONS PER 3D-FILE IN DL-.
- 5 2 OR 3 SPRING LOADED CONTACT POINTS DURING SURFACE TREATMENT.

PREMEK HI TECH s.r.l.
Via J. Linussio, 3/5
33170 PORDENONE
P.IVA 01114050931

| | | | | | | | | | | | | |
|---|--|------------------------------|---|--------|---------------------------------------|------------|--|--|--------------|--------------|--------------|--|
| Generella krav där ej annat angivet Unless otherwise specified | | |  | | Info/Classification Classification | | Company Restricted | | | | | |
| Tolerans/tol allemaalngen | Tolerans/tol ISO 2768 | Tolerans/tol gøgor/treads | Sign An-Mand-Day Year-Month-Day | | | | | | | | | |
| ±0,1 | | - | Ritad/Drawn | STANDN | | 2022-03-22 | | | | | | |
| Tolerance Vinkel/Angles | Skarpa kantar bryter/Break sharp edges | | Skala/Scale | | 2:1 | | Classification export control Not export controlled | | | | | |
| ±1° | 0,1-0,3 | | Projekt/Project | | FOG | | | | | | | |
| | | | Benämning/Name | | | | | | | | | |
| | | | EMI COVER | | | | | | | | | |
| Ytömhett/ Surface rough | | | Ytbehandling/ Surface treat | | | Material | | | A | 8-47215 | 221 | |
| Ra3,2 | | | ③ | | | ① | | | Urf Issue | AO nr/ECO No | ÅVVV YYWW | |
| | | | Ritnings nr/Dwg No | | | | | | | | Blad/Sheet | |
| | | | R-8088155-009 | | | | | | | | 1/1 | |