GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

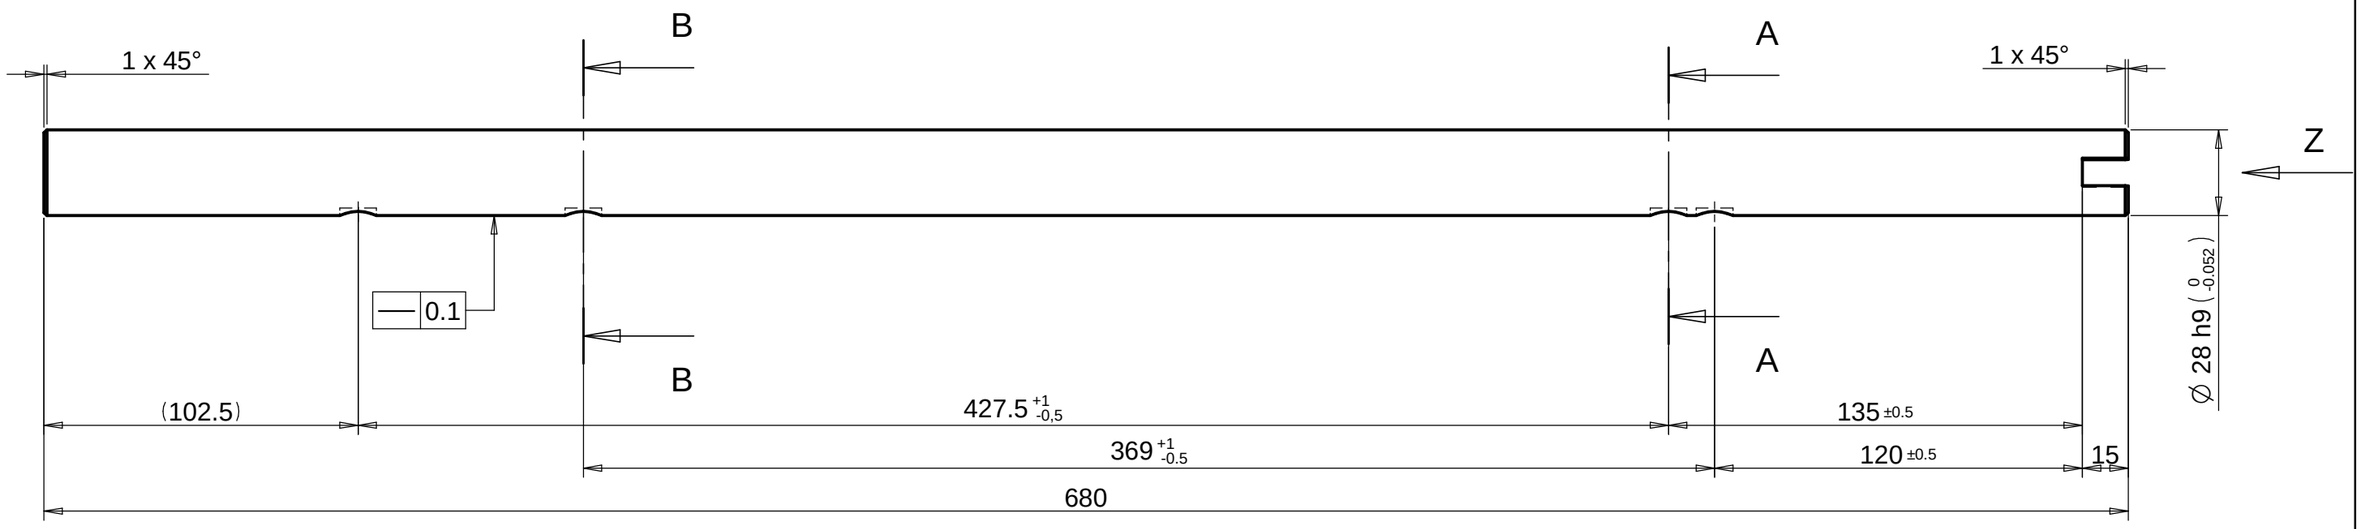

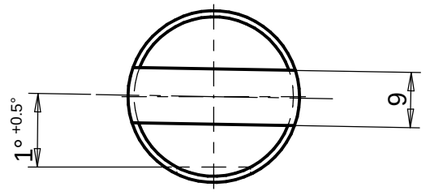

VIEW/Vista Z
SCALE/Scala: 1:1

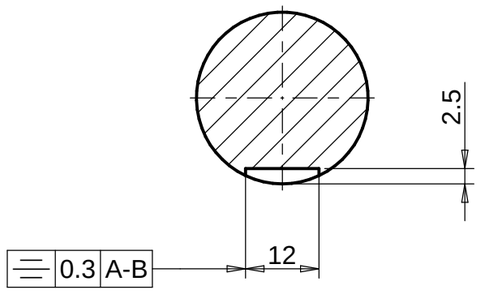

SECT./Sez. B-B
SCALE/Scala: 1:1

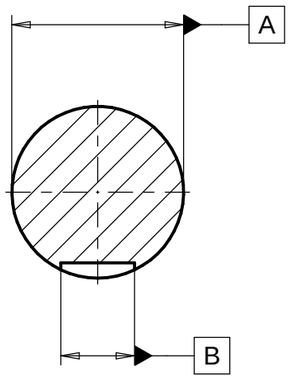

SECT./Sez. A-A
SCALE/Scala: 1:1

CN01290	AGG. QUOTA 680 (ERA 685) SECONDO REALTA' PROD.		1
Change	Modification details:		IRP
Changes to previous release:		Substitute:	
Material:	11SMnPb30+C UNI EN 10277-3	Code:	4032_2257_99
Supply state:	+C: COLD DRAWN	Dimensions:	
Thermic treat.:		Hardness(T):	
Surface treat.:	Fe/Zn8c2c UNI ISO 2081 free Cr VI	Hardness(S):	

DENOMINATION: ASTA ALIMENT. VOLUFIL

Savio	Draw.: Carmine Barbarito	Date: 09/02/2016	009371.0.0
	App. : Roberto Badiali	Sheet N°: 1/1	
		Scale: 1:2	ROUND ROD

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.