




SECTION B-B

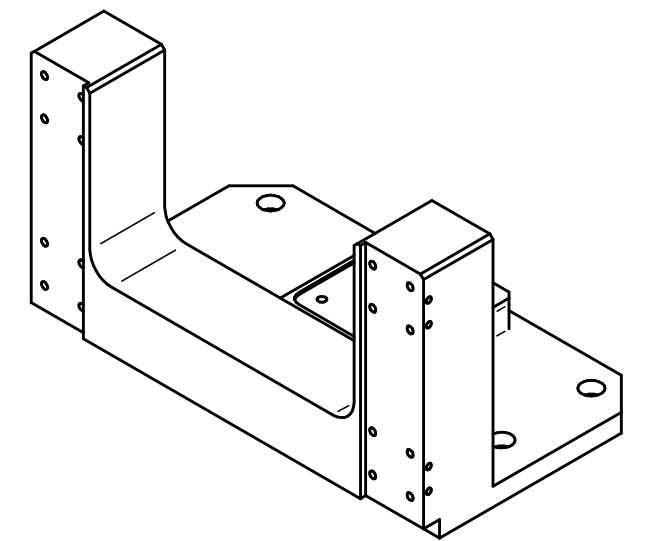


1:5

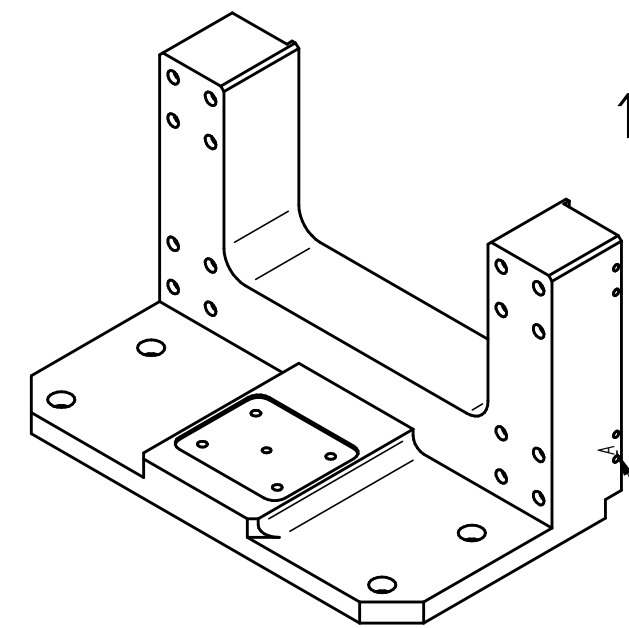

(**) Marking text orientation "A".
Orientamento testo marcatura "A".

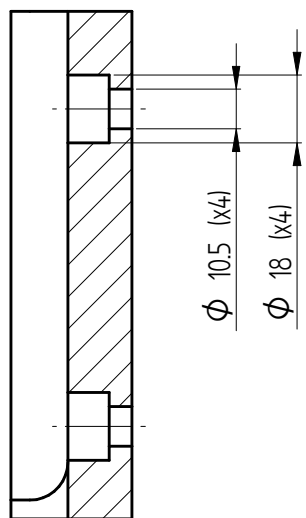

SECTION C-C

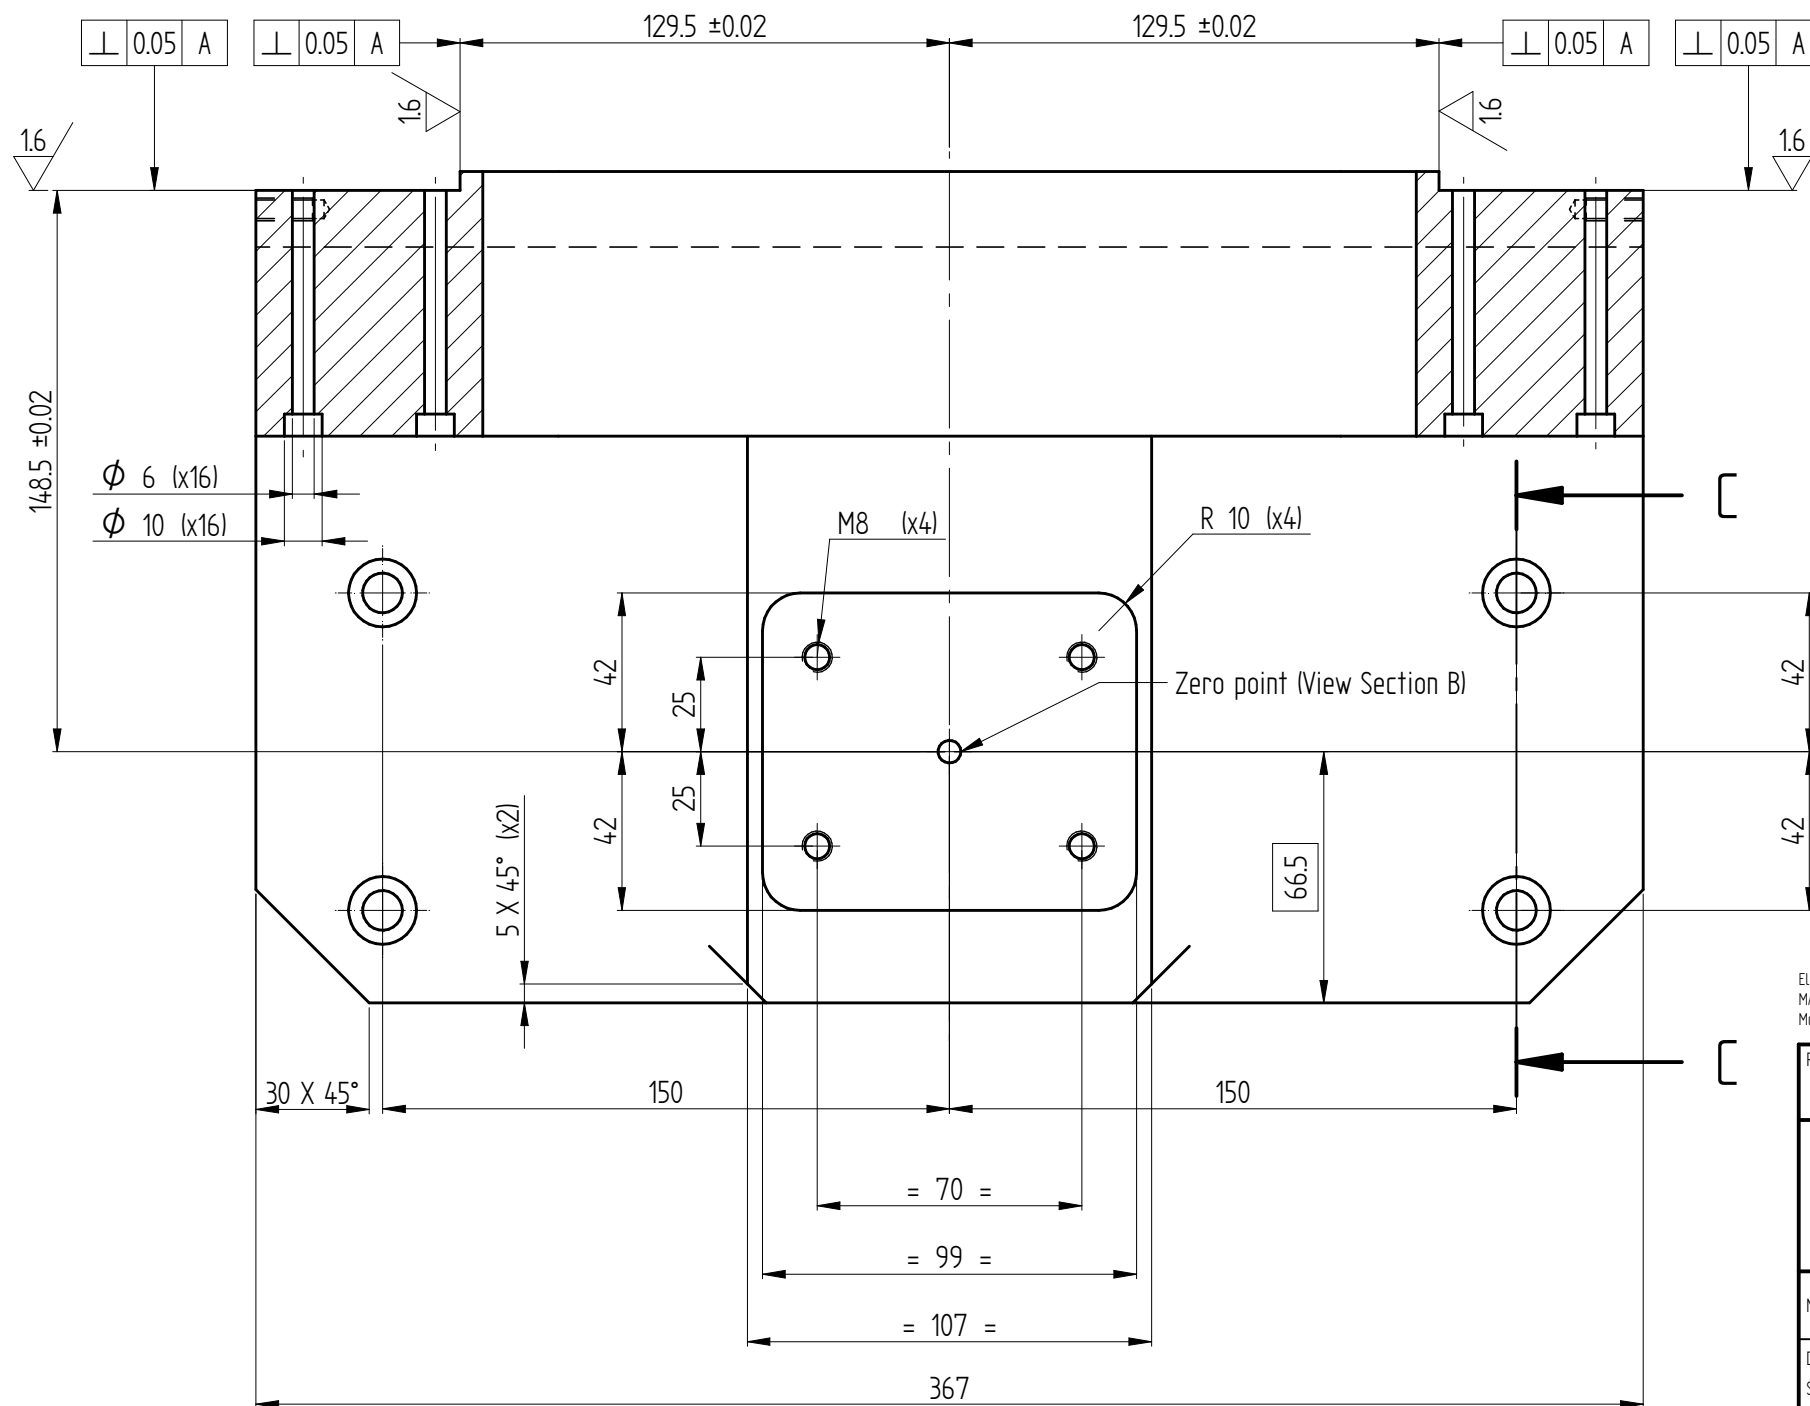

SECTION A-A

Eliminate the rough edges (chamfers 0.5x45°)
MATERIAL MUST BE SUPPLIED IN CONFORMITY WITH SIPA STANDARD FMX 016
Mark on the piece the wordings SIPA and the complete drawing number (*) (see the operative instructions SIPA Q10-Q05)

REVISION DESCRIPTION		MODIF.	DATE	DRAWN BY	CONTROLLED BY
SIPA		Generic Machine Tolerance UNI-EN 22768/1	m	REPLACED BY:	
		Generic Machine Tolerance UNI-EN 22768/2	K	REPLACES:	
MATERIAL: P-ALMg0.5Si0.4Fe				WEIGHT (kg):	1120
DELIVERY STATE: -				SHEET	1/1
HEAT TREATMENT: -				SCALE:	1:2
SURFACE TREATMENT: ANODIZZAZIONE NORMALE 15-20 micron NORMAL ANODIZING 15-20 micron					
NOTE: SIPA FMX.008,SIPA F.P.X.008, SIPA FMX.008,SIPA F.P.X.008,					
DESCRIPTION: SLITTA SLIDE					
DRAWN BY:		CONTROLLED BY:		APPROVED BY:	
DATE:		CODE:		41344150 / 00	

Each modification must be communicated and approved in written form by SIPA SpA.

This document and the information herein included are SIPA SpA property and confidential. It is prohibited to reproduce it or to make it know in whole or in part to other parties without written authorization of SIPA SpA.