GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

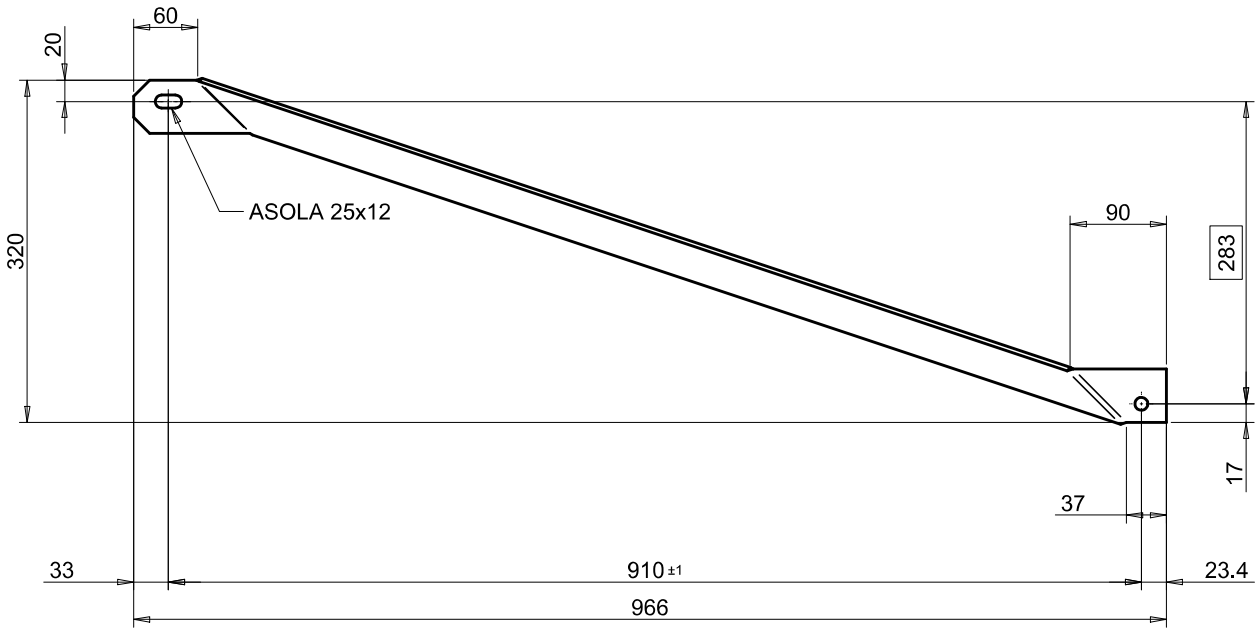

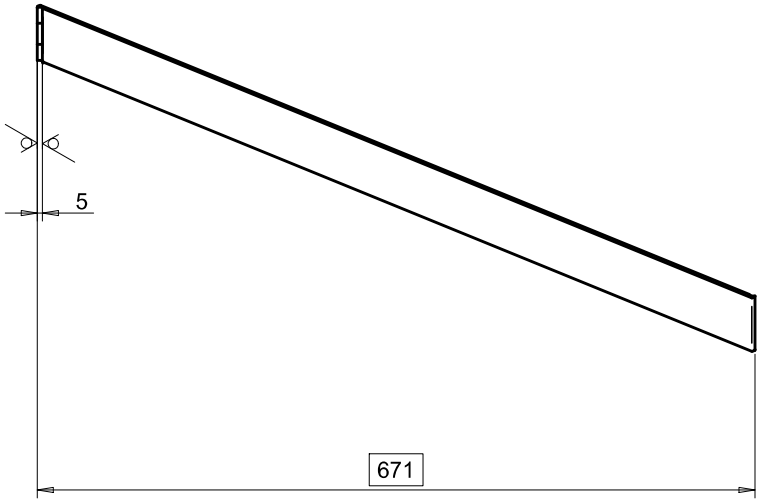

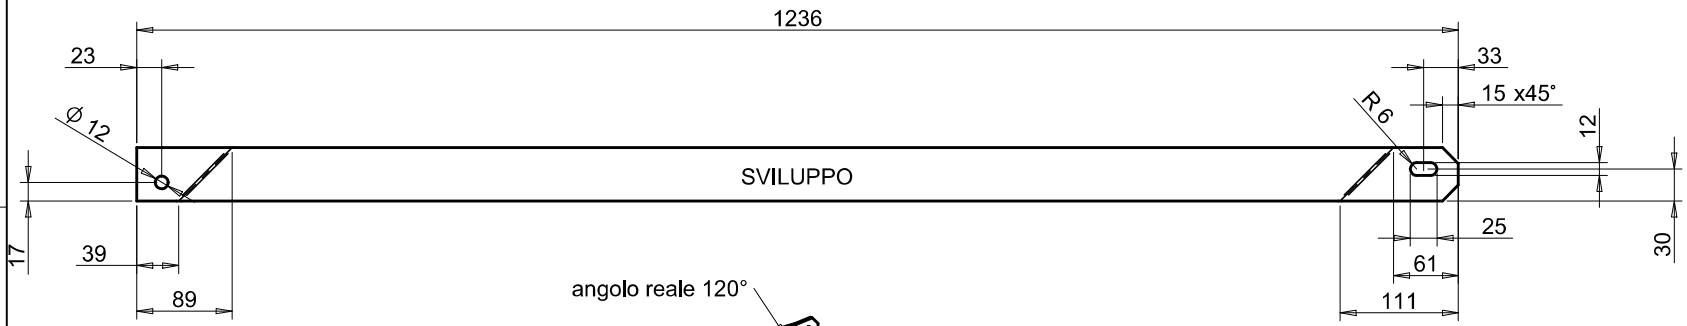

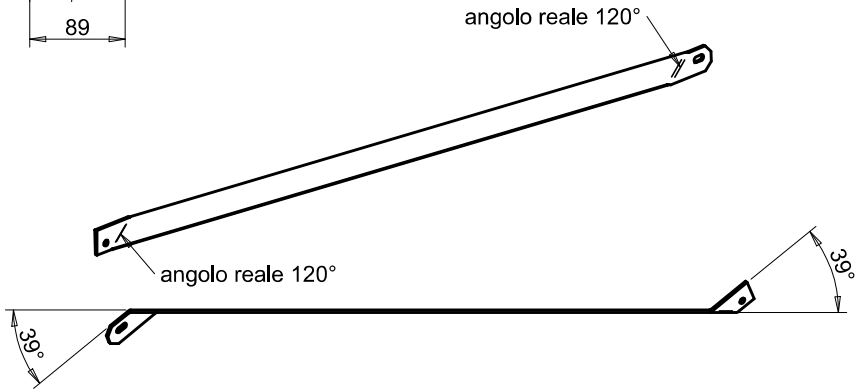

6.3 ( ) - MAXIMUM BURR:/Bava max: 0.15

CN02336	AGG. TOLLERANZE SECONDO REALTA' PRODUTTIVA	30/11/2017	3
Change	Modification details:	Date Mod:	IRP
Changes to previous release:		Substitute:	
Material: S235J2G3 +N UNI EN 10025		Code: 4032_6002_99	
Supply state: +N: NORMALIZING ROLLING		Dimensions:	
Thermic treat.:		Hardness(T):	
Surface treat.:		Hardness(S):	

DENOMINATION: STAFFA TRASP.TRONC.ANT.SX

Draw.: Carmine Barbarito	Date: 25/08/2016	013340.0.0	
Mod.: Carmine Barbarito	Sheet N°: 1/1		
App.: Vittorio Colussi	Scale: 1:10	BRACKET	

Reserved property of [redacted] accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.