A	B	C	D

GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

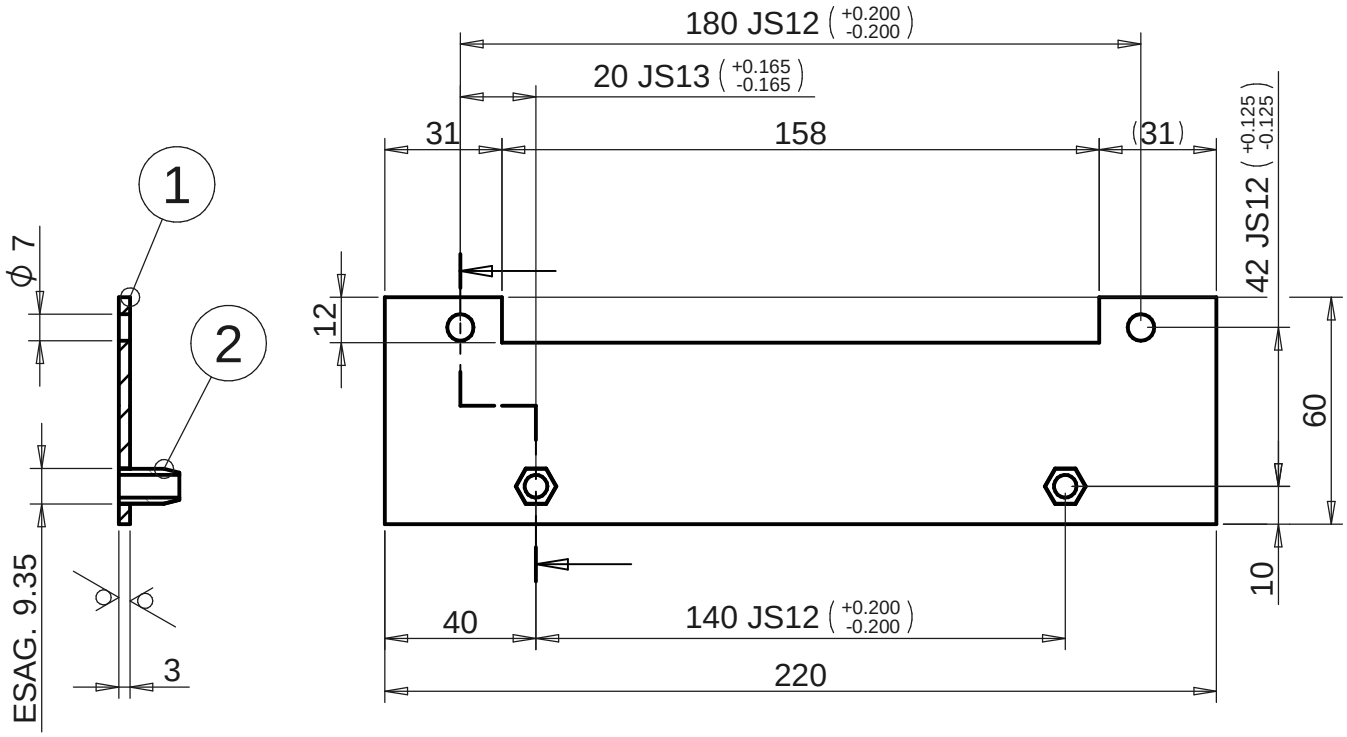

6.3 ( ) BAVA MASSIMA 0,04 / MAXIMUM BURR

POS.	Code	Q.ty	Raw Material	Material Description	Techical Description
2	4026_6103_08	2		UNI 10447B1 M6 8 FE/ZN8C1A M6	
1	052005.0.A	1	4032_6153_99	DD11 A1 UNI EN 10111	

CN05927		25/07/2022	00
Change	Modification details:	Date Mod:	IRP

Changes to previous release:	Obtain from:	Substitute:
Material:	Code:	
Supply state:	Dimensions:	
Thermic treat.:	Hardness(T):	
Surface treat.: Fe/Zn 8÷12 A HP UNI ISO 2081 free Cr VI	Hardness(S):	

DENOMINATION: PIASTRA FISS. INVERTER LENZE

Savio	Draw.: Gianni D'Andrea	Date: 01/06/2022	052005.0.0
	Mod.: Gianni D'Andrea	Sheet N°: 1/1	
	App.: Alberto Bittolo	Scale: 1:2	PLATE

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.