


Sprocket wheel as per ISO 606
Number of teeth : $z=21$
Pitch : $1" = 25,4 \text{ mm}$

KTl-coating RAL 9005 SURFACE TREATMENT BLACK CATAPHORESIS (Cataphoresis / E-coat) Layer Thickness > 20µm
Splines, threads and ISO tolerances (ISO 286) free of paint (if present)
NOTE: Unless otherwise stated, dimensions are prior to coating

DIMENSIONS WITHOUT TOLERANCES SHOULD MEET THE FOLLOWING STANDARDS:
General tolerances: ISO 2768-c (coarse)

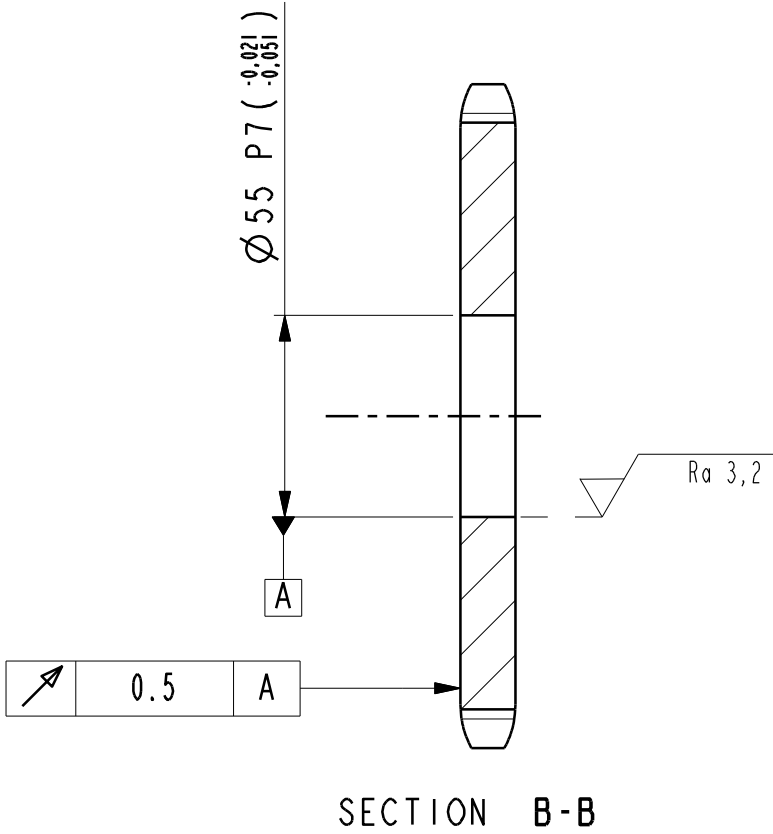

CODE	PLATE EN 10051	C45	MODIFICATIONS
14/Apr/22	EXT. DIM: 181x181x15	FINISH: WEIGHT: 2.206	UNITS: Millimeter / Kilogram
SCALE	SPROCKET	FORMAT A3	SHEET
0.500	KETTINGWIEL	REVISION	1/1
	Z=21	0	RELEASE LEVEL
	PART NO.	Z4428580	Phase 3