



SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.


Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico



	0.4	-0,2/100
	0.4	//0,2/100
	0.25	±0,2/100

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

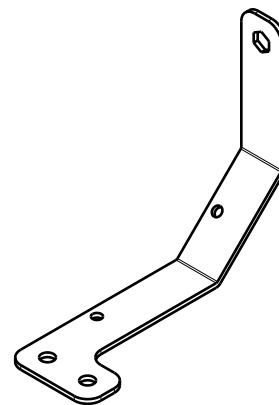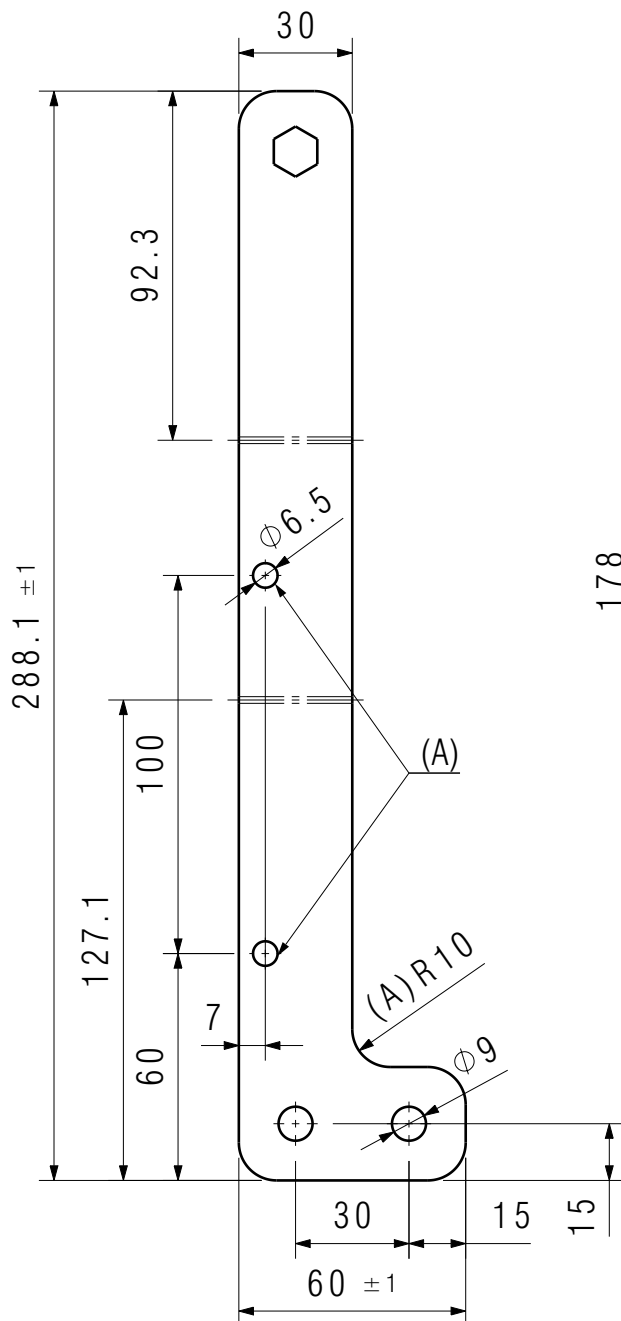

PARTE SPECCHIATA / Mirrored part B0C1P2427



01	B19-046	C-1	(A) Added holes and chamfer (A) Aggiunti fori e raccordo	gsama	sbuzzolani	19/11/2019
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
<div><p>MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschio.com</p><p>THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW</p></div>				Treatment: --		Creation Date 24/10/2018
				Trattamento: --		
				Surf.Finish: --		
				Finitura sup: --		Weight [Kg] 0,217
Material: S235 EN 10025-1:2005						
Document No: FERABOLI		Class: --	Critical Lev: --	Blank Decr: --		Perimeter [mm] 808
				Descr.Grezzo:--		
Part Nr: B0C1P2426			Replace: --	Blank: --		Wet Area[m2]: --
Description: LEFT LOWER ATTACK CARTER Descrizione: ATTACCO CARTER INFERIORE SX				European method		Scale: 1:2
						Circumferences included

General tolerance - Tolleranza generale: UNI EN 22768/1 - M							
Length and Diam.	0.00	6.00	30.0	120	315	1000	2000
Lungh. e Diametri	6.00	30.0	120	315	1000	2000	4000
Tolerance	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±3,0
Tolleranza	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±3,0