| GENERAL TOLERANCES |
|---|
| Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance. |
| MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16 |
| SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00 |
| PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00 |
| The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions |

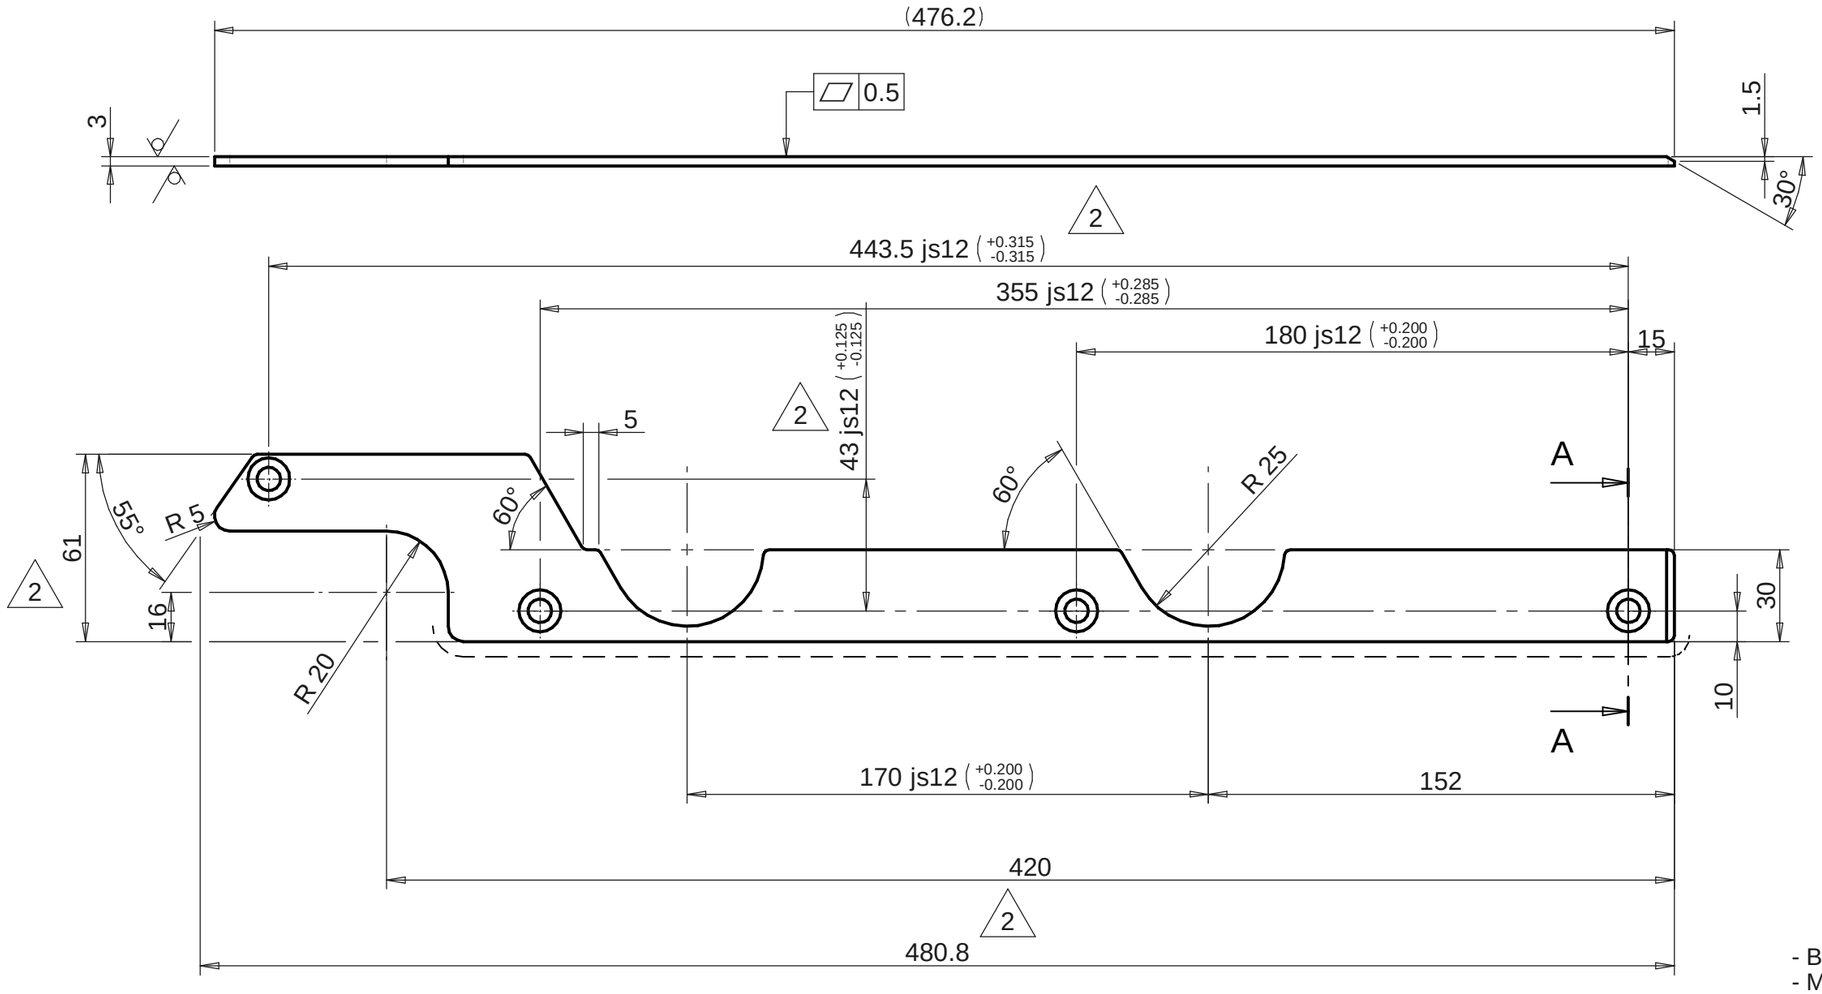


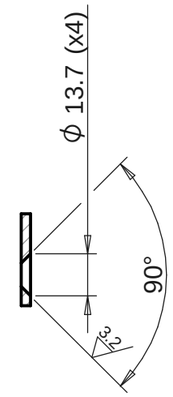


SECT./Sez. A-A

- BAVA MAX 0.04
- MAXIMUM BURR

- RAGGI NON QUOTATI R2
- FILLETS WITHOUT DIMENSION

- ESENTE DA BAVE, SPIGOLI VIVI ED ASPERITA'
- FREE FROM DRIBBLES, SHARP EDGES AND BUMPS

6.3 (3.2)

| | | | |
|---|---|---|---|
| CN07068 | | 24/11/2023 | 00 |
| Change | Modification details ☐: | Date Mod: | IRP |
| Changes to previous release △: MODIFIED A4 AREA | Obtain from: | Substitute: 042207.1.0 | |
| Material: S235J2G3 +N UNI EN 10025 | Code: 4032_6002_99 | | |
| Supply state: +N: NORMALIZING ROLLING | Dimensions: | | |
| Thermic treat.: | Hardness(T): | | |
| Surface treat.: Cataphoresis epoxy graphite black RAL9011 4010-0003-00 | Hardness(S): | | |
| Weigth: 0.3 kg | Volume: 37686.24 mm^3 | | |

DENOMINATION: GUIDA

| | | | |
|---|---|---|---|
| SAVIO | Draw.: Enrico Gaiotto | Date: 23/11/2023 | 042207.2.0 |
| | Mod.: Enrico Gaiotto | Sheet N°: 1/1 | |
| | App.: Stefano Malfante | Scale: 1:2 | GUIDE |

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.