




Front View1

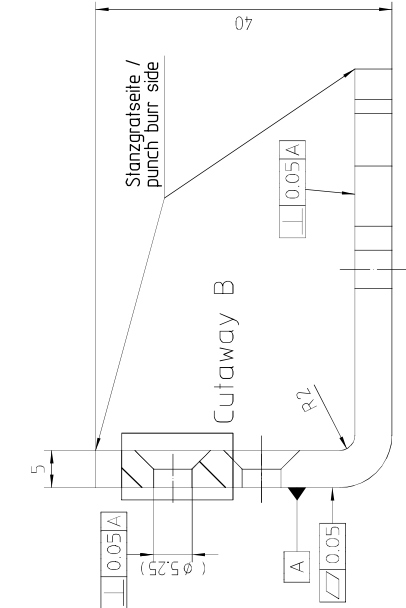


Left View1

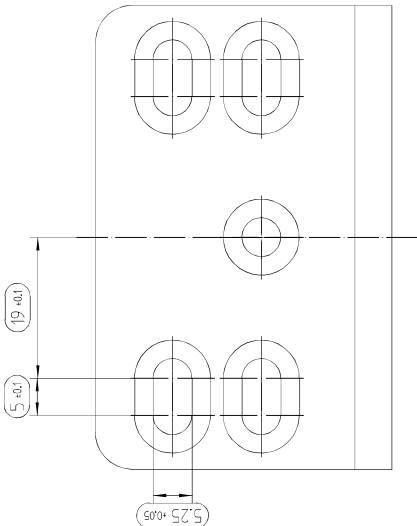

Front View2

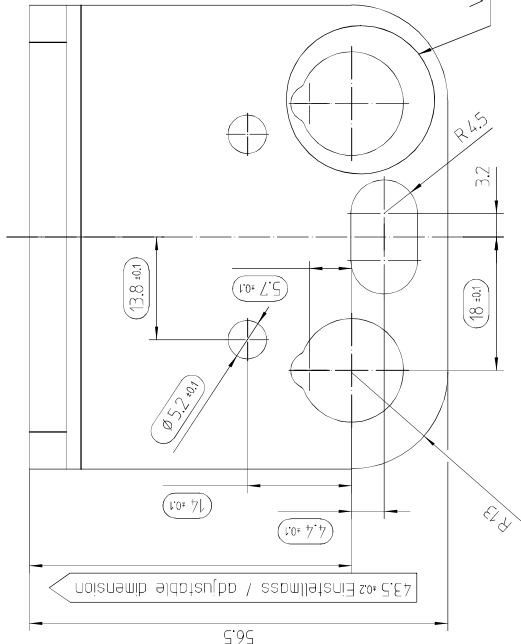

Top View1

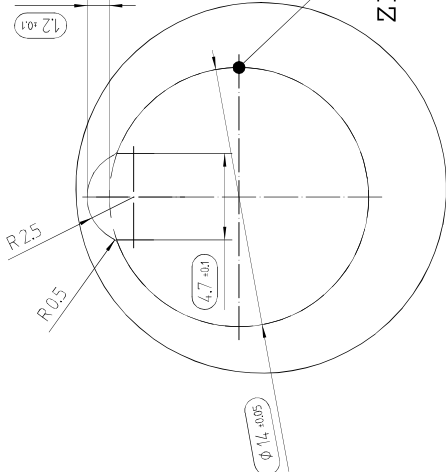

DETAIL 1
5:1

semilavorato
AXGR-7043809-01
FINITO:

ZINC. Z_{in}i= 7043839-01
ZINCATURA:DIN EN ISO 19598: ZnNi8/Cn/TO

Blu Iridescente Symbol

Wichtiges Funktionsmerkmal bzw. -maß nach DIN 406 Teil 10 ist die Prozessüberwachung und Prozessüberwachung besonders zu beachten).

Kritisches Funktionsmerkmal bzw. -maß (bei der Prüfplanung besonders zu beachten, die Prozessfähigkeit ist nachzuweisen).

Generell sind bei der Erstbenutzung alle Maße zu prüfen

Symbol

Critical functional characteristic or dimension (and especially during test planning, process capability must be verified).

In general, check all dimensions during initial sampling

Passing on, duplication of this base, in not allowed, concealed generally not expressly in writing. Offences commit to consequences. At right for the case of the process capability and process monitoring evaluation are left for reservations.

General tolerance

ISO 2768-mK

Scale

2:1

Document status

Released

Revision

00001252847 01

Drawing number

Hinge bracket

Revision

00001252847 01

Origin:Electro, DINA2