
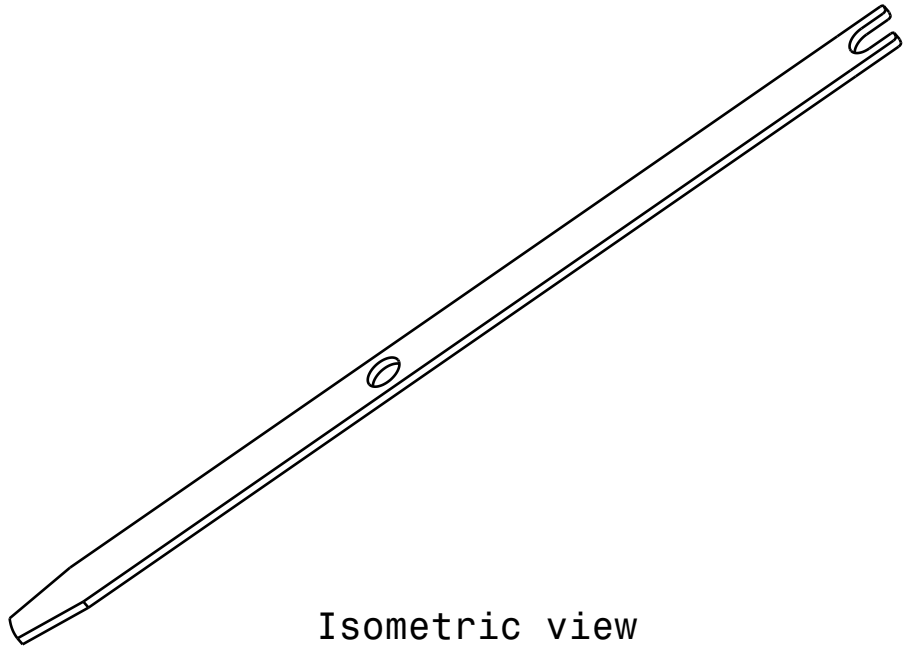


| | | | CAD | | | |
|-----|--------|------|--------------------------------|--|--|-------------|
| REV | DATE | PLAC | DESIGN CHANGE LEGEND: | | | |
| | | | T=ADDED U=DELETED V=WAS | | | |
| 7 | 191003 | D5 | Bend removed | | | MPN NLN DRN |
| 7 | 191003 | D8 | Shortened and changed geometry | | | MPN NLN DRN |

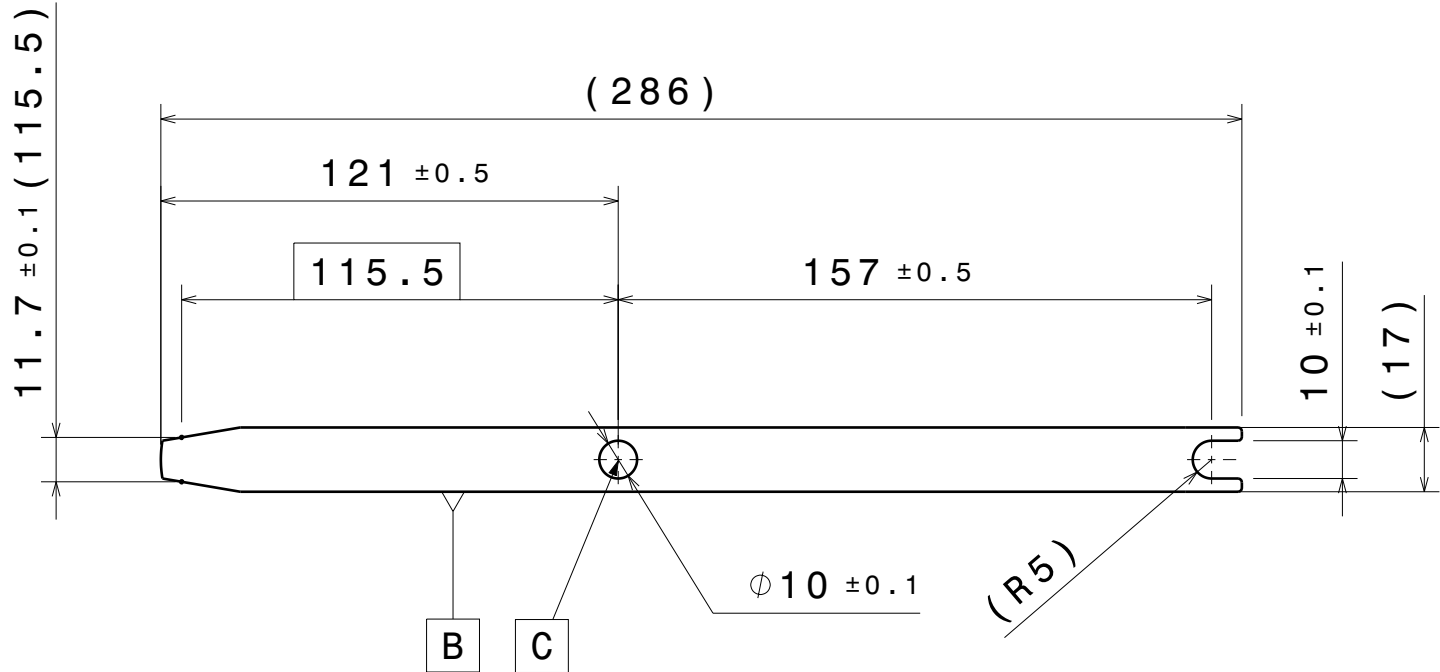

- Unless otherwise stated following tolerances applies:

| | | | | | |
|----------------|--|-----|---|---|---|
| Mating surface | | 1 | A | B | C |
| Other surface | | 1.5 | A | B | C |
| Holes | | 1 | A | B | C |
| Cut edges | | 1 | A | B | C |

- Surface treatment: MAN 183-3-B4
- Corrosion Protection acc. to: MAN 183-3 B4
- Tolerances refers to coated part
- Material thickness: 2.5 ±0,18 mm
- Colour: Black
- Broken edges min 0.1mm
- Where dimensions are excluded refer to 3D model
- Product Characteristics Classification:
 - (CC) Critical Characteristics
 - (SC) Significant Characteristics

| | | | | |
|-------------------------------------|---------------------|-------------|-------------|-------|
| | | | | |
| MATERIAL EN 10149-2 S355MC (1.0976) | | | SCALE 1:1 | |
| SURFACE SEE NOTE | | | A3 / C | |
| TITLE Linkage arm lock lower bunk G | | | E0 2964 | |
| WEIGHT 78g | GENERAL TOLERANCE - | | SHEET 1 / 1 | REV |
| DRAWN NLN | DATE 180118 | DRAWING NO. | | PHASE |
| REF.DRW XX 62159_0L38 | 741654 | | P | 7 |