GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

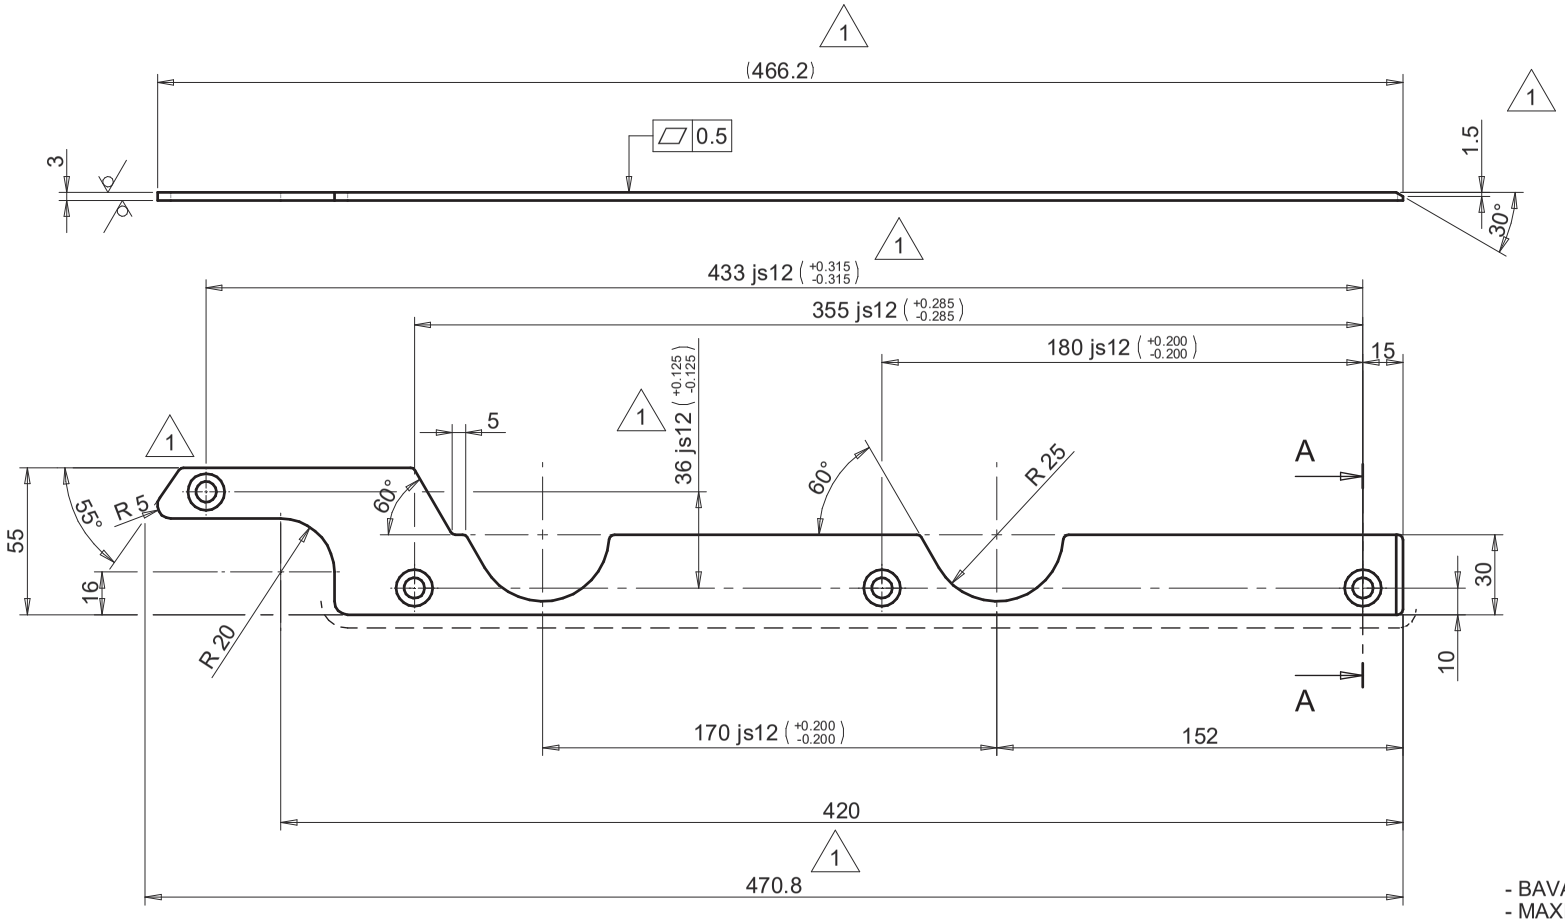



SECT./Sez. A-A

- BAVA MAX 0.04
- MAXIMUM BURR

- RAGGI NON QUOTATI R2
- FILLETS WITHOUT DIMENSION

- ESENTE DA BAVE, SPIGOLI VIVI ED ASPERITA'
- FREE FROM DRIBBLES, SHARP EDGES AND BUMPS

6.3 (3.2)

CN06888		04/08/2023	00
Change	Modification details ☐:	Date Mod:	IRP
Changes to previous release △: MODIFIED A4 AREA		Obtain from:	Substitute: 042207.0.0
Material:	S235J2G3 +N UNI EN 10025	Code:	4032_6002_99
Supply state:	+N: NORMALIZING ROLLING	Dimensions:	
Thermic treat.:		Hardness(T):	
Surface treat.:	Cataphoresis epoxy graphite black RAL9011 4010-0003-00	Hardness(S):	
Weigth:	0.3 kg	Volume:	35435.74 mm^3

DENOMINATION: GUIDA

Draw.: Enrico Gaiotto	Date: 18/07/2023	042207.1.0	
Mod.: Enrico Gaiotto	Sheet N°: 1/1		
App.: Stefano Malfante	Scale: 1:2	GUIDE	

Reserved property

ccordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.