




ISO - VIEW
Scale: 1:2





PREMEK HI TECH s.r.l.

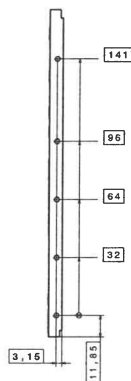


C - C
Scale: 2:1




SURFACES WITHOUT ANODIZING ACCORDING TO NOTE 4.

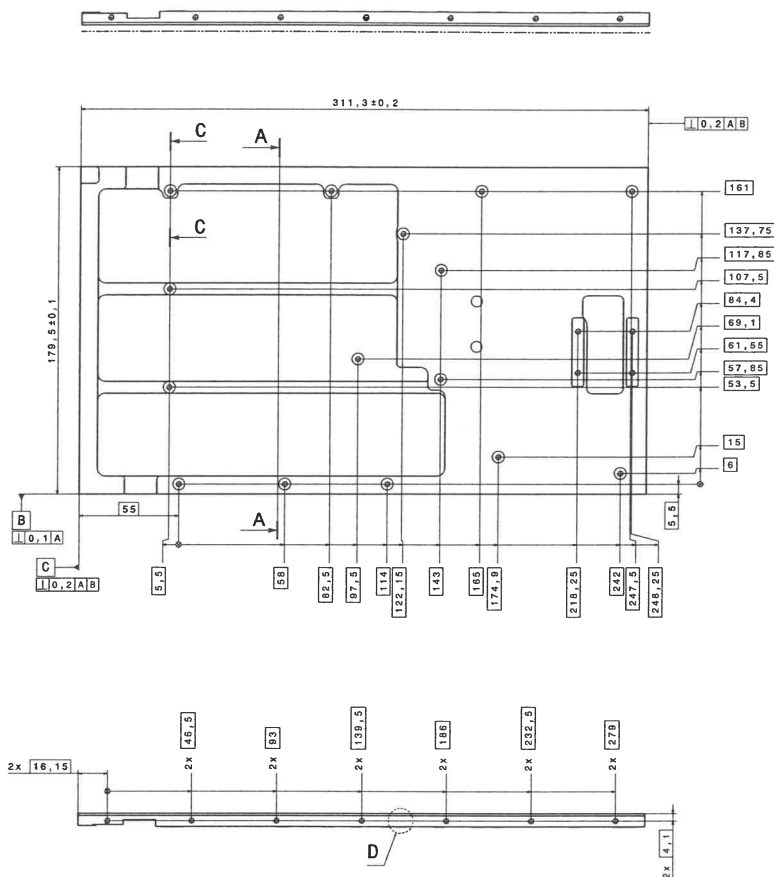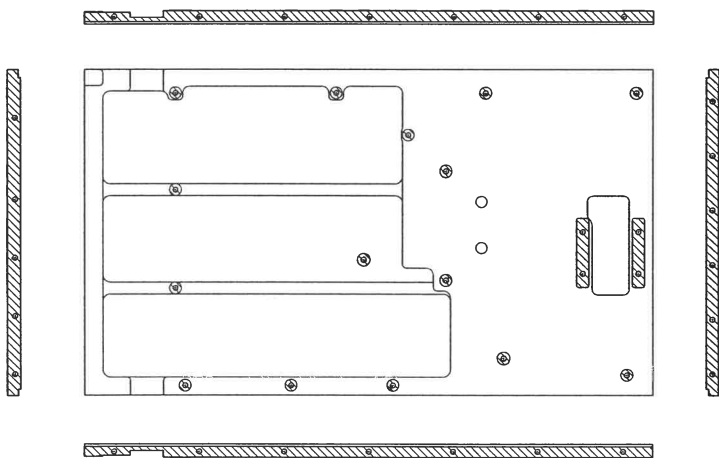


B - B
Scale: 2:1



D
Scale: 5:1



3. WHERE OTHERWISE NOT STATED, DIMENSIONS ACCORDING TO 20-MODEL IN DOCUMENT LIST, TOLERANCE: ±0.31 | ±0.1
- ② MATERIAL: ALUMINIUM EN-AW 6062-T6 OR T651.
- ③ SURFACE TREATMENT: SULPHURIC ACID ANODIZING PER MIL-A-8625 D STD 1978, TYPE II CLASS 2 - BLACK, THICKNESS 19±5µm HYDROTHERMALLY SEALED IN NOT DETONIZED WATER, ALL HOLES MASKED AND FREE FROM SULPHURIC ACID ANODIZING.
4. SURFACES MARKED  SHALL BE FREE FROM SULPHURIC ACID ANODIZING AND HAVE SURFACE TREATMENT ACCORDING TO NOTE 9.
- ⑤ SURFACE TREATMENT: TCP (TRIVALENT CHROMIUM PRETREATMENT), IN ACCORDANCE WITH MIL-DTL-5541 TYPE II CLASS 3.
6. NO CLAMP MARKS ON SURFACES MARKED:

[illegible]