


SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.

Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico

	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

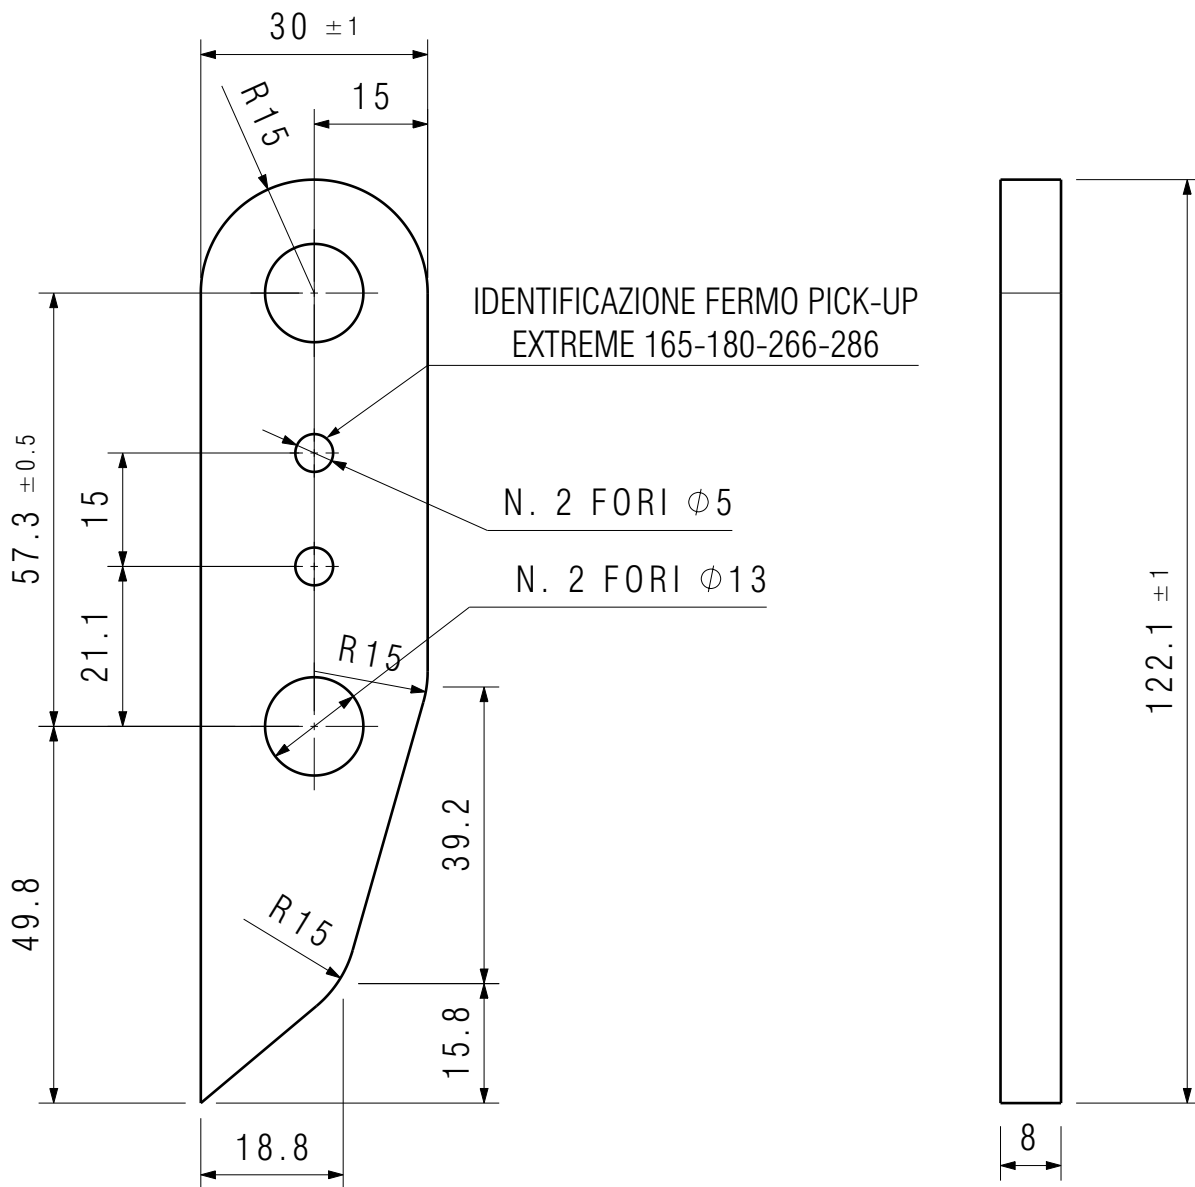

00	B20-023	C-1	Release Emissione	Idalcero	sbuzzolani	08/07/2020
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
 MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVAILING LAW				Treatment: --		Creation Date
				Trattamento: --		24/05/2019
				Surf.Finish: Zinc Coating Electrolytic Ref. Cap TS-002		
				Finitura sup: Zincatura Elettrol. Rif. Cap TS-002		
				Material: S355 EN 10025-1:2005		Weight [Kg]
				Blank Decr: --		0,171
				Descr.Grezzo: --		
Part Nr: B0C1P3739			Replace: --	Blank: --	Wet Area[m2]: --	Perimeter [mm]
Description: PICK-UP STOP 165-180-266-286				European method		384
Descrizione: FERMO PICK-UP 165-180-266-286				Scale: 1:1		Circumferences included

General tolerance - Tolleranza generale: UNI EN 22768/1 - M					
Length and Diam.	0.00	6.00	30.0	120	4000
Lungh. e Diametri	6.00	30.0	120	315	4000
Tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8
Tolleranza	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8