



NOTES:

TUTTI GLI SPIGOLI ESENTI DA BAVE
ALL CORNERS TO BE BURR FREE

SUPERFICI ESENTI DA AMMACCATURE, OLIO, COLLA, GRAFFI E ALTRI DIFETTI
SURFACES AREA MUST BE FREE FROM DENTS,OIL,GLUE,STICKER AND OTHER DEFECTS

I LEMBI DEVONO ESSERE ACCOSTATI PER EVITARE FESSURE E SALDATI ALL'INTERNO A TRATTI DI 10-15 mm
FLANGES MUST BE APPROACHED TO AVOID CHINK. THEY MUST BE WELDED INSIDE WITH 10-15 mm MARKS

PARTI FILETTATI ESENTI DA VERNICIATURA
THREADS EXEMPT FROM PAINTING

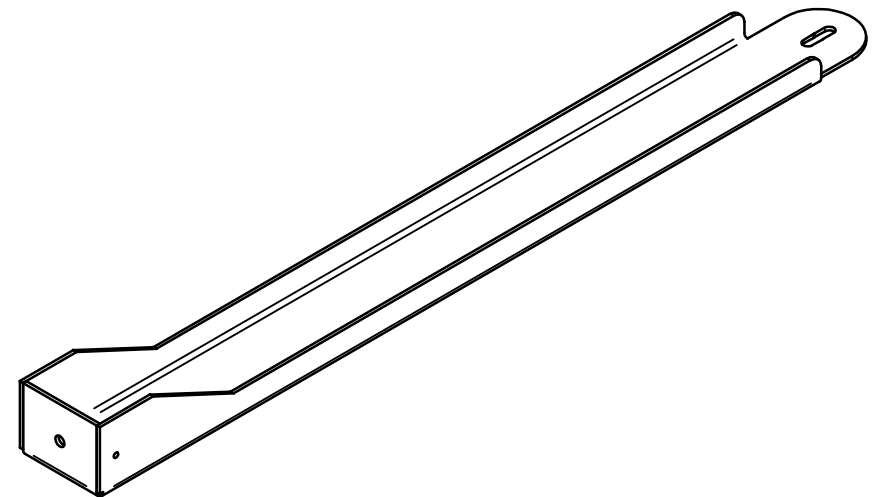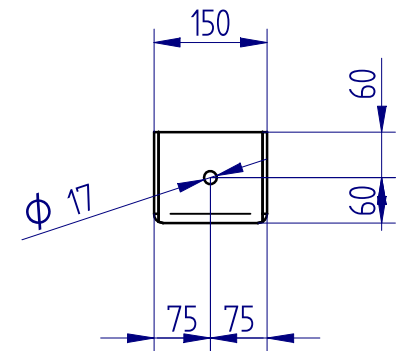

| - | - | - | - | - |
|---|---------------------------|---------------------------------|-------------------------------|---------------------|
| - | - | - | - | - |
| A | Aggiunto For M10 Passante | | | 04/03/2013 |
| REV. | DESCRIPTION | DRW. | n° Project | DATE |
| General Tollerances ISO 2768-m | | 0.5-3 ±0.1 | 3-6 ±0.1 | 6-30 ±0.2 |
| | | 30-120 ±0.3 | 120-400 ±0.5 | 400-1000 ±0.8 |
| | | 1000-2000 ±1.2 | 2000-4000 ±2 | Angoli ±1° |
| Material (Oesse specifications:SP095) DD11 EN 10111 Sp 6mm | | | Painting: CATAFORESI | |
| Treatment : Oesse specifications: SP092 | | First Issue Date 27/11/2012 | Last Issue Date 04/03/2013 | Scale 1:10 |
| Weight 17.155 kg | | Designer 3D | Designer 2D | App/Ver |
| | | | | |
| | | Description SUPPORTO SX CAT. | | |
| | | Project N° PR12/251 | Derived From Code: - | Code PS41305D.00 |