




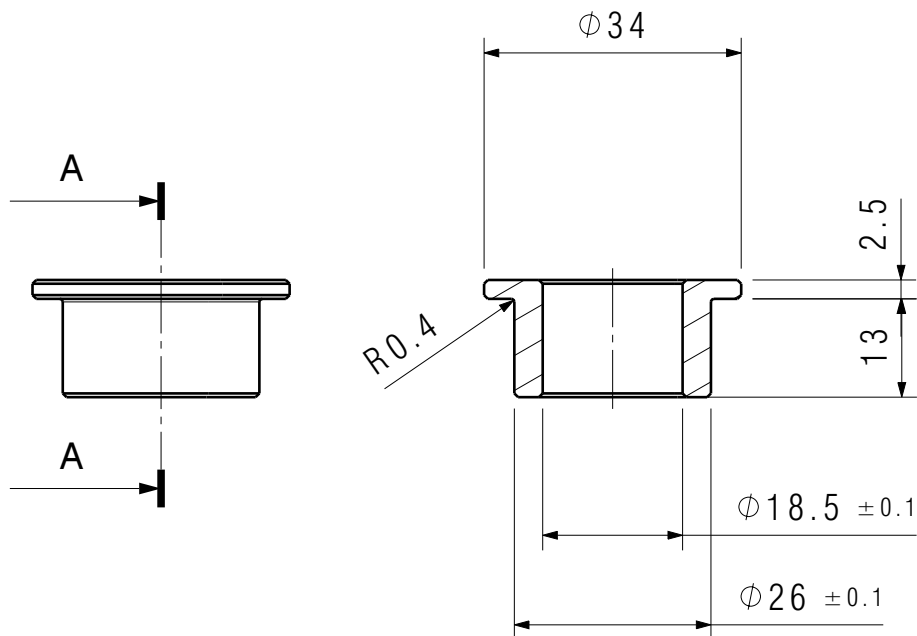
SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0.5x45°. For other specifications please contact the Technical Department.

Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0.5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico

	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100



Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$



SMUSSI NON QUOTATI 0.5x45°

1.6

General tolerance - Tolleranza generale: UNI EN 22768/1 - M			
Length and Diam. Lungh. e Diametri	0.00 6.00	0.00 30.0	0.00 120
Tolerance Tolleranza	±0.1 ±0.2	±0.3 ±0.5	±0.8 ±1.2
	4000	2000	2000

00	M21-038	A-1	Release Emissione	apauletto	pbaraldi	01/07/2021
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
<div><p>MASCHIO GASPARDO S.p.A. Via Marcello, 73 - 35011 Campodarsego (Padova) - Italy Email: info@maschio.com www.maschionet.com</p><p>THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVAILING LAW</p></div>				Treatment: --		Creation Date
				Trattamento: --		
				Surf.Finish: Zinc Coating Electrolytic Ref. Cap TS-002		24/06/2021
				Finitura sup: Zincatura Elettrol. Rif. Cap TS-002		
				Material: S355 EN 10025-1:2005		Weight [Kg]
Blank Decr: --		0,039				
Descr.Grezzo: --						
Model: --	Group: --	Critical Lev: --	Blank: --		Wet Area[m2]: --	Perimeter [mm]
Part Nr: M43400523		Replace: --	Scale: 1:1			
Description: Bushing D=26 d=18.5 Descrizione: BOCCOLA D=26 d=18.5		European method 				
						Circumferences included