GENERAL TOLERANCES
Angular dimension +-1° - Roundness range of tolerance from IT4 to IT11. Must be contained within half of dimensional tolerance.
MACHINED holes H14 shafts h14 linear values Js14 -- ROUGH holes H16 shafts h16 linear values Js16
SHEETS cutting/laser cutting/punching Js13 holes H13 bending/pressing Js14 -- ALUMINIUM DIE CASTING Savio Norm 4011_1005_00
PLASTIC MATERIALS according to DIN 16901 -- CAST IRON Savio Norm 4011_1003_00
The general tolerances for ROUGH of plastic (DIN 16901) of aluminium (4011_1005_00), of CAST IRON (4011_1003_00), must be intended H for holes, h for shafts, Js for all the other dimensions

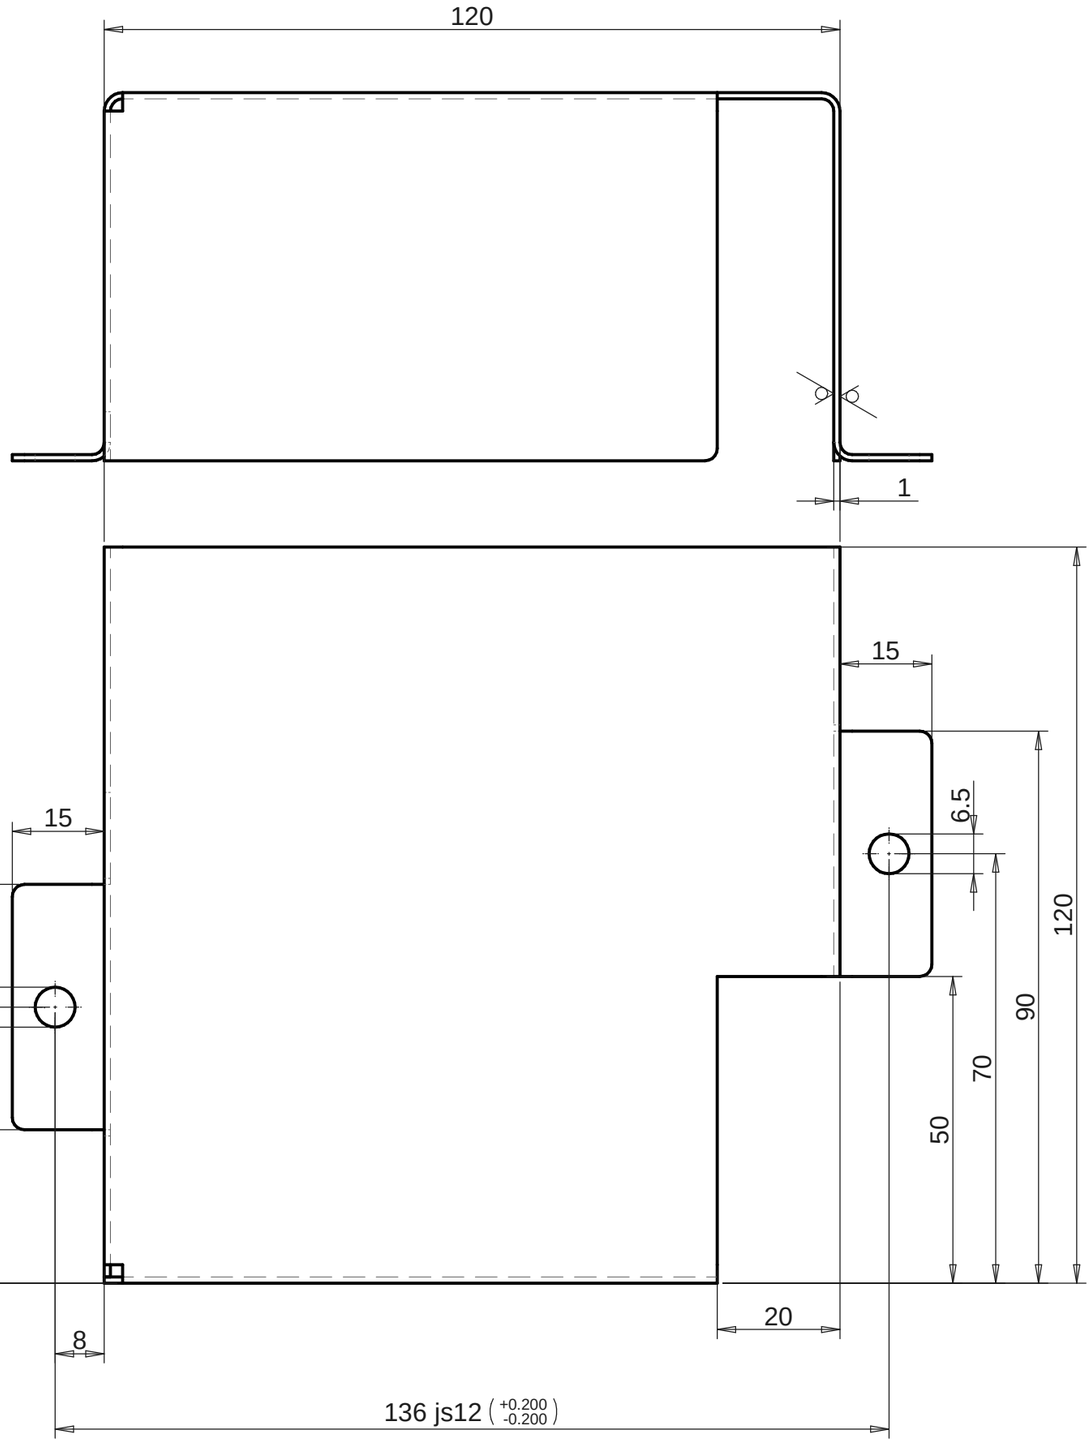

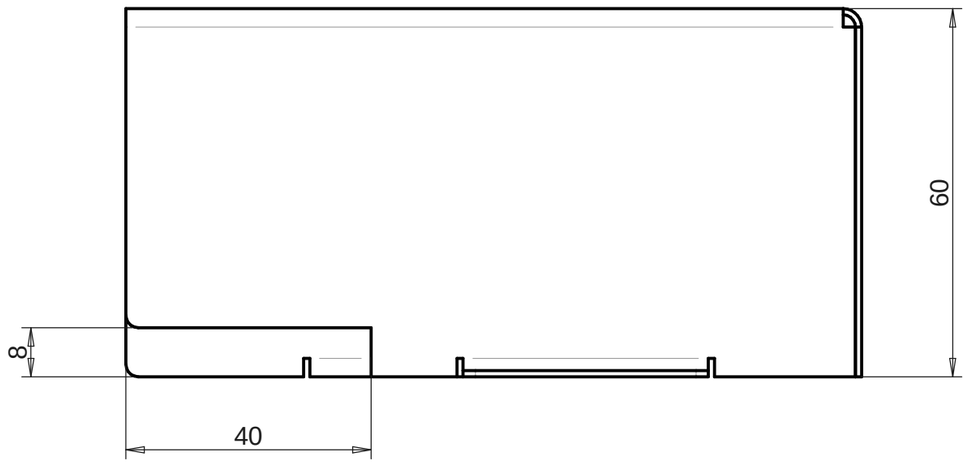

- BAVA MAX 0,15
- MAXIMUM BURR

- RAGGI NON QUOTATI R 2
- RADIUSES WITHOUT DIMENSION

- RAGGI INTERNI DI PIEGATURA R=2
- INTERNAL BENDING RADIUS

6.3

CN05763		18/07/2022	00
Change	Modification details:	Date Mod:	IRP

Changes to previous release:		Obtain from:	Substitute:
Material:	DC01+A-G UNI EN 10130	Code:	4032_6152_99
Supply state:	+A-G: SURFACE A FINISHING G	Dimensions:	
Thermic treat.:		Hardness(T):	
Surface treat.:	Epoxy polyester powder p. telegrey 4 RAL7047 4010-0003-00	Hardness(S):	

DENOMINATION: COPERCHIO VALVOLE PREPARATORE PROXIMA DX

SAVIO

Draw.: Marco Pivetta	Date: 04/07/2022	052511.0.0	
Mod. : Marco Pivetta	Sheet N°: 1/1		
App. : Giuseppe Morini	Scale: 1:1	COVER	

Reserved property of SAVIO MACCHINE TESSILI S.p.A. In accordance with the law, the contents of this drawing may not be re-produced or communicated to third parties.