

SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA




Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0.5x45°. For other specifications please contact the Technical Department.

Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0.5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico



	0.4	—0.2/100
	0.4	//0.2/100
	0.25	⊥0.2/100

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$

General tolerance - Tolleranza generale: UNI EN 22768/1 - M			
Length and Diam.	0.00	6.00	30.0
Lunghezza e Diametri	6.00	30.0	120
Tolerance	±0.1	±0.2	±0.3
Tolleranza	±0.1	±0.2	±0.3

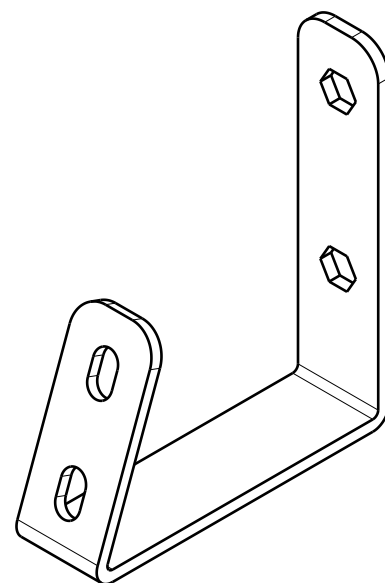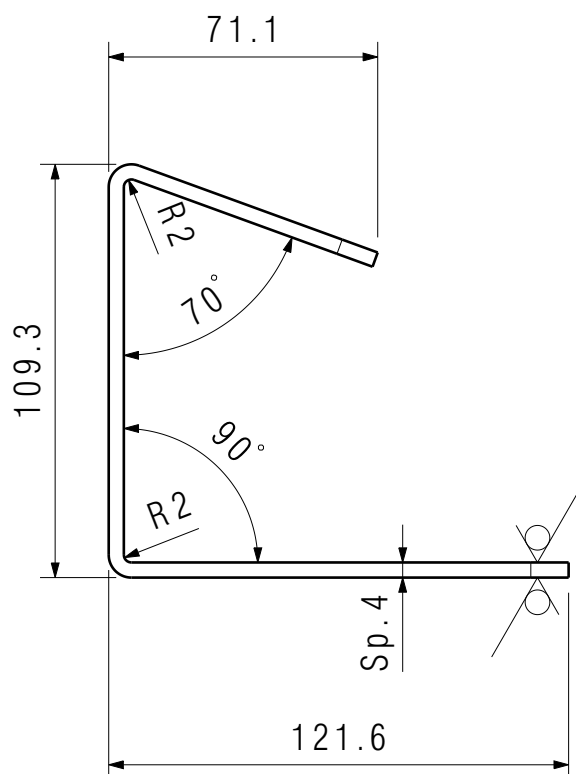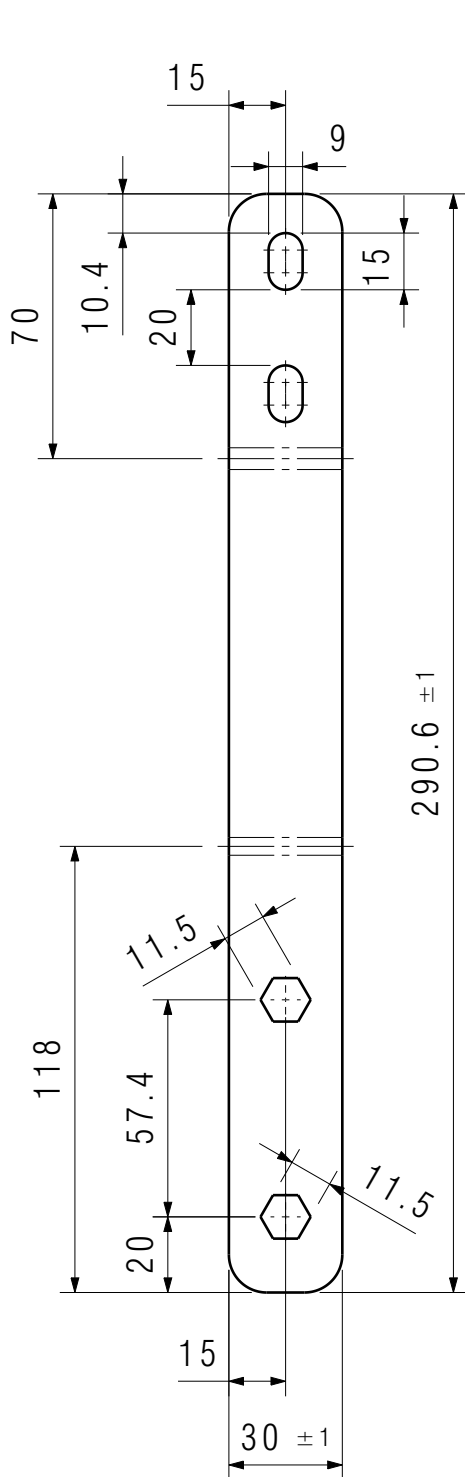

12.5 / ()

01	B19-046	C-1	Changed geometry Variata geometria		gsama	sbuzzolani	19/11/2019	
Rev	Mod. N°	Type	Modification object / Descrizione modifica			Drawn by	Approved by	Approv. Date
<div><p>MASCHIO FIENAGIONE Via Bredina, 6 - 26100 Cremona (CR) - Italy Email: info@maschio.com www.maschio.com</p><p>THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW</p></div>					Treatment: --		Creation Date	
					Trattamento: --			
					Surf.Finish: --			
					Finitura sup: --		24/10/2018	
					Material: S235 EN 10025-1:2005		Weight [Kg]	
Document No: FERABOLI		Class: --	Critical Lev: --	Blank Decr: --		0,26		
				Descr.Grezzo:--				
Part Nr: B0C1P2417			Replace: --	Blank: --		Wet Area[m2]: --	Perimeter [mm]	
Description: TOP REAR ATTACK CARTER							784	
Descrizione: ATTACCO CARTER POSTERIORE SUPERIORE				European method 		Scale: 1:2	Circumferences included	