


SUPPLY SPECIFICATIONS / SPECIFICHE DI FORNITURA

Remove all punching burrs after machining or press-forming process, draft angle 2°, fillets not quoted R=2, chamfers not quoted: 0,5x45°. For other specifications please contact the Technical Department.
Eliminare bave e spigoli da lavorazione o stampaggio, sforni generali 2°, raggi non quotati: R=2, smussi non quotati: 0,5x45°. Per ogni ulteriore specifica, contattare l'Ufficio Tecnico


	0.4	—0,2/100
	0.4	//0,2/100
	0.25	⊥0,2/100

Angles $\pm 1^\circ$
Angoli $\pm 1^\circ$


General tolerance - Tolleranza generale: UNI EN 22768/1 - M					
Length and Diam. Lunghezza e Diametri	0.00	6.00	30.0	120	4000
	0.00	6.00	30.0	120	4000
Tolerance Tolleranza	±0.1	±0.2	±0.3	±0.5	±0.8
	±0.1	±0.2	±0.3	±0.5	±0.8

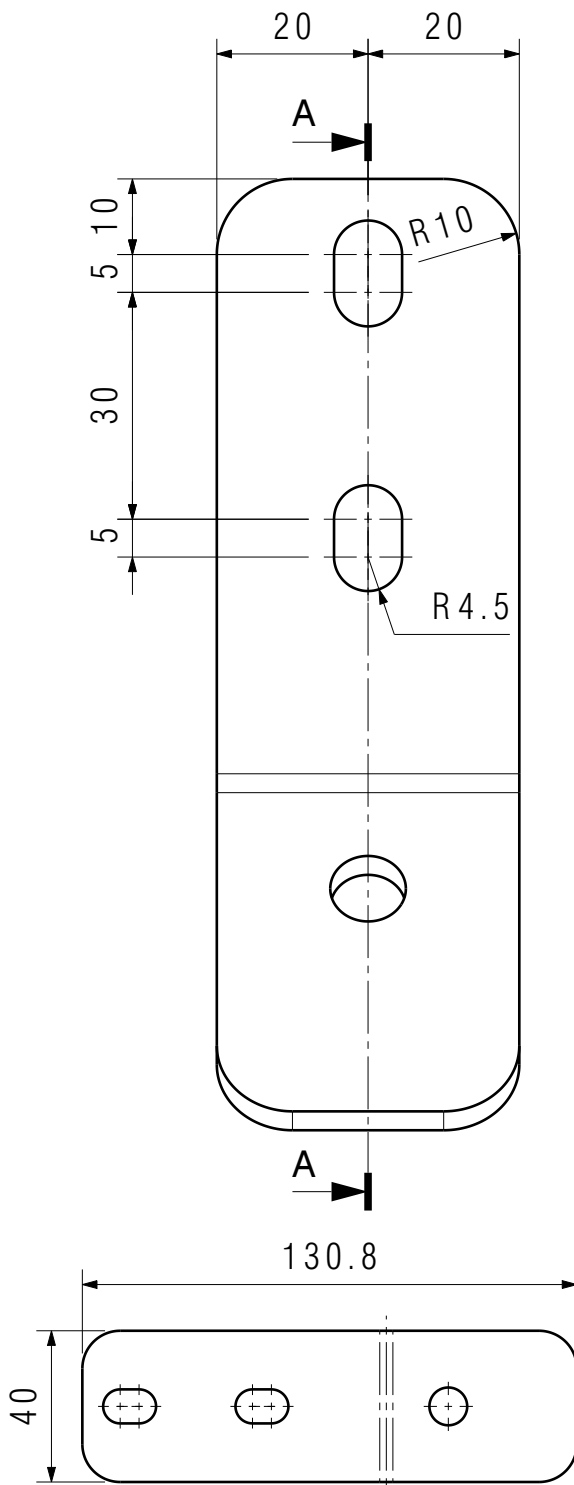

Section view A-A
Scale 1:1

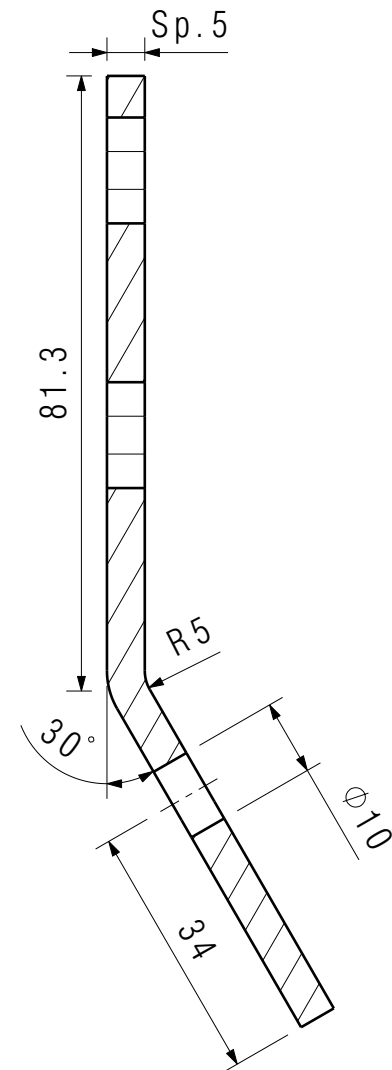

Isometric view
Scale 1:2

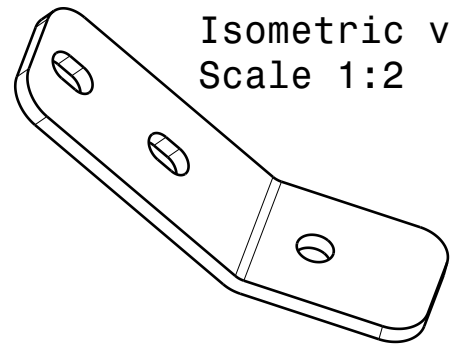

Fare riferimento al DXF per le quote mancanti.

01	N20-020	A-2	CHANGE HOLES WITH SLOTS CAMBIO FORI CON ASOLE	mvadori	ndorigutto	29/06/2020
Rev	Mod. N°	Type	Modification object / Descrizione modifica	Drawn by	Approved by	Approv. Date
 MASCHIO GASPARDO S.p.A. Via Marcella, 73 - 35011 Campodarsego (Padova) - Italy Email: info@maschio.com www.maschionet.com THIS DRAWING IS PROPERTY OF MASCHIO GROUP AND PROTECTED IN ACCORDANCE WITH PREVALING LAW				Treatment: -- Trattamento: -- Surf.Finish: Sandbla. Cataph. Paint Ref. Cap TS-001 Finitura sup: Sabb. Cataf. Vern. Rif. Cap TS-001 Material: S355 EN 10025-1:2005		
Document No: -- Class: -- Critical Lev: --				Blank Decr: -- Descr.Grezzo: -- Weight [Kg] 0,191		
Part Nr: N51106120			Replace: --	Blank: --	Wet Area[m2]: --	Perimeter [mm] --
Description: NEW FIXING SLID. BEN.SH.MET. Descrizione: PIASTRA FISS.STRISCIANTE NEW				European method	Scale: 1:1	Circumferences included