



wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER

Applications

- Revenue metering
- Residential submetering
- Commercial buildings
- Leakage detection
- AMR / AMI and billing
- Drive-by metering



Features

- Residential potable water consumption metering
- Temperature compensated for cold water as well as hot water up to 50°C (122°F)
- No moving parts. Wear-free ultrasonic technology
- Durable, proven BRASS sensor body. Solves the challenges in harsh environments
- Patented sensor design. provides precise signal, robust performance, and is not impacted by water impurity
- Excellent long-term stability with consistent performance. Accuracy does not degrade over time
- Maintenance-free
- Leakage detection
- Tamper-proof design. Records when tampering is detected
- Not affected by magnetic interference
- Does not measure entrained air in pipe
- Bi-directional flow
- Low pressure drop
- Free positioning for installation
- Large LCD, 9 digits display
- More than 10 years battery life
- IP 68 water-proof
- Better than OIML R49 / ISO 4064 Class D
- OMS-complaint wMBus radio module for drive-by meter reading or AMR/AMI fixed meter reading
- Data Logger with 700 daily totals and 24 monthly totals
- Optional SpireCapture AMR/AMI and Billing solutions

DS-280WDS-1710_Rev.1



Spire Metering Technology LLC, 249 Cedar Hill Street, Marlborough, MA 01752, USA

Tel +1 978 263-7100 / 888 738-0188 (toll-free) **Fax** +1 978 418-9170 **sales@spiremt.com** **www.SpireMT.com**



wPrime™ Series 280W-D RESIDENTIAL ULTRASONIC WATER METER



A member of the wPrime™ Series, the 280W-D Residential Ultrasonic Water Meter is specially designed for domestic water metering applications where conventional water meters fail due to harsh environment, solids in water, performance degradation, magnetic vandalism or incapable of leakage detection.

The 280W-D offers the most advanced water flow measurement by using state-of-the-art ultrasonic technology. Its flow sensor does not have any moving parts that can wear or tear, which provides a robust and accurate meter with no maintenance.

The technical specifications of the 280W-D meet the standards for residential utility metering with its Class D performance, Environmental temperature from 0.1°C to 50°C and safety temperature up to 85°C, as well as nominal pressure of 1.6MPa. The wide dynamic range allows for a load up to double the rating, thereby ensuring high operation security. The large LCD can display the flow total, leakage alarm, reverse flow, and more. The meter also has an AMR/AM interface which could be configured as M-Bus or RF wireless.

Spire Metering's 280W-D Residential Ultrasonic Water Meter stands out among its competition due to its robust performance, patented sensor design, tamper-proof feature, multiple AMR / AMI options and capability to detect very low flowrate. It works reliably even when the water has particles and the environment is harsh. Residential installations can profit from the advantage of the wear-free water flow measurement, namely, precision, operation security and long service life.





wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER


Operating Principle

The wPrime™ series water meter consists of a flow sensor and an integrator. The flow sensor is a flow-cell made from brass (figure below.) Two ultrasonic transducers, A and B, are firmly mounted on the flow-cell at optimal positions, with two reflectors inside of the flow tube. The ultrasonic signal generated by one transducer is directed toward the flow direction by the reflector below it. When the ultrasonic signal reaches to the other reflector, it is redirected to the transducer above it. Therefore, each transducer can receive the signal sent from another transducer.

An integrator (or calculator) controls the two ultrasonic transducers to transmit and receive ultrasound in an orderly fashion so as to conduct precise flow measurement. Specifically, the integrator operates the two transducers to simultaneously transmit a pulse of ultrasonic energy into the water flow. The pulse signal travels along the flow and reaches to the other transducer under the guidance of the two reflectors. Obviously, the downstream pulse (from A to B) travels faster than the upstream pulse (from B to A). The travel time (or transit-time) difference of the two pulses is directly proportional to flow velocity. Therefore, the flowrate can be derived from the transit-time difference accordingly.

The wPrime™ series water meter has used advanced digital signal processing technology to precisely measure the transit-time of each ultrasonic pulse. A statistic algorithm is also used to counter interference which could come from solids or air bubbles in the water. The flow-cell is optimally designed according to our patented technology, so that the multimode reflection in the flow tube is significantly attenuated. It allows significant increase in signal strength and quality, thus, the robustness of the system. The flowrate calculation is based not only on transit-time difference and the geometry of the flow-cell, but also on fluid dynamics theory.

Only ultrasonic pulses are used to interrogate the flow which enables the meter to have no moving parts. Therefore, there is nothing to wear out or cause a reduction in accuracy. In addition, the principle is based on the transit-time difference instead of transit-time, all the interfering factors, such as the temperature, pressure, solids concentration and water quality, are cancelled out. The end result is that the system is inherently robust!

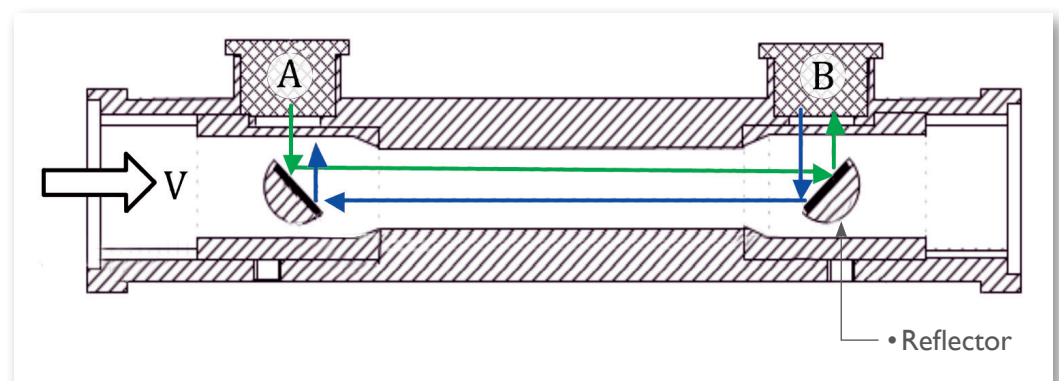



wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER

Automatic Meter Reading


The wPrime™ series water meter offers a variety of interface options, such as wired MBus, radio wireless as well as OMS-compliant WMBus. It is flexible to be integrated into an AMR/AMI system or a drive-by system.

Spire Metering also offers a complete range of AMR/AMI solutions as well as an integrated billing system. The SpireCapture system is a cutting edge fixed automatic meter reading system which integrates both wired and wireless AMR/AMI technologies. The system provides a unified platform for meter reading and data management through M-Bus networks, RF wireless networks, GSM networks, GPRS networks, as well as TCP/IP networks. In addition, it works seamlessly with Spire Metering's billing software to make data exchange easy, fast and reliable.

SpireCapture is an advanced, highly robust meter reading solution that delivers comprehensive

usage information as well as timely, high-resolution meter reading. This data enables gas, water, heat and electric utilities to eliminate on-site visits and estimated reads, reduce theft and loss, implement time-of-use billing, and profit from all of the financial and operational benefits of fixed-network AMR/AMI.

Other than automatic meter reading, Spire Metering also offers drive-by solution. For detailed information on drive-by system and AMR/AMI system, please contact us at solutions@spiremt.com.

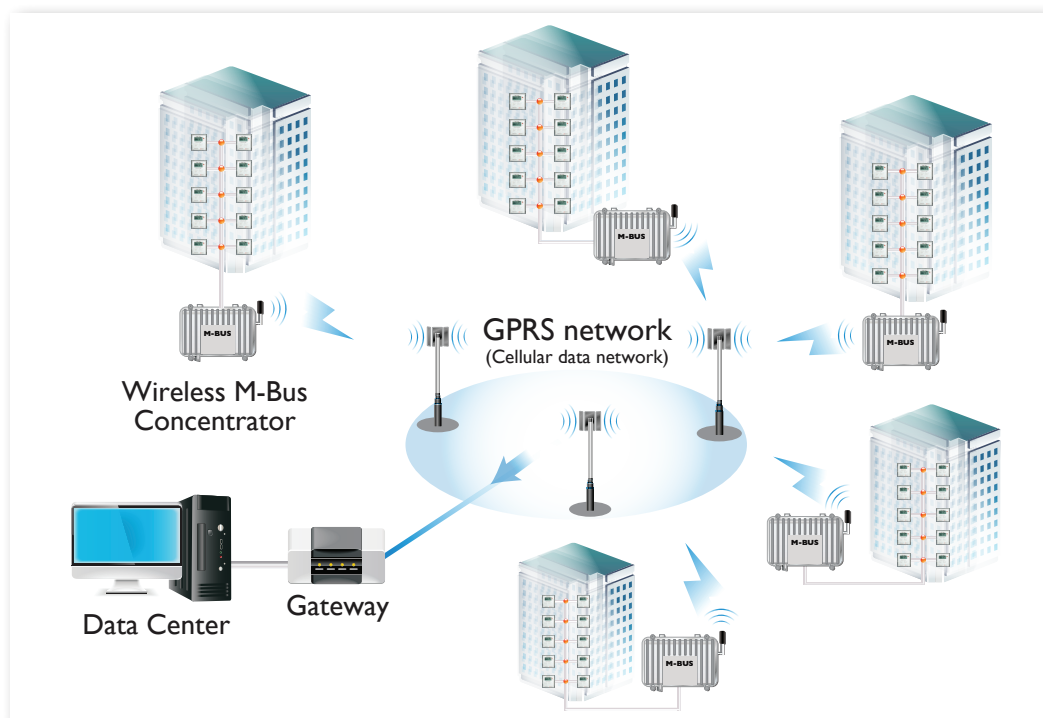





wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER

Technical Specifications

| Size | | Flowrate | | | | | | Dimensions | | | | | | Pressure Loss (bar) | Weight (kg) | Pipe Joint (BSP) | |
|------|----|-------------------|------|-------------------|----------------|----------------|----------------|------------|-----|-----|----|-----|----|------------------------|----------------|------------------|------------|
| mm | in | Q ₃ | | Q ₄ | Q ₂ | Q ₁ | Q _s | L | | L1 | H | H1 | Φ | | | Sensor | Ext. Piece |
| | | m ³ /h | GPM | m ³ /h | l/h | l/h | l/h | mm | in | mm | mm | mm | mm | | | | |
| 15 | ½ | 1.6 | 7.04 | 2 | 10.24 | 6.4 | 3.5 | 110 | 4 ½ | 206 | 72 | 145 | 95 | 0.48 | 0.7 | G¾B | R½ |
| 15 | ½ | 2.5 | 11.0 | 3.125 | 16 | 10 | 3.5 | 110 | 4 ½ | 206 | 72 | 145 | 95 | 0.48 | 0.7 | G¾B | R½ |
| 20 | ¾ | 4 | 17.6 | 5 | 25.6 | 16 | 3.5 | 130 | 5.1 | 226 | 72 | 145 | 95 | 0.27 | 0.85 | G1B | R¾ |

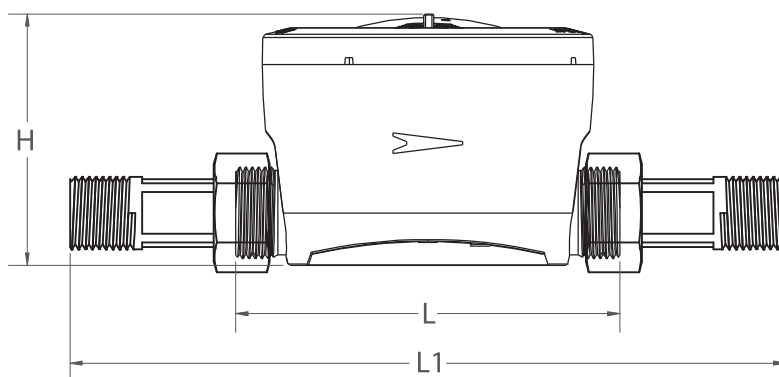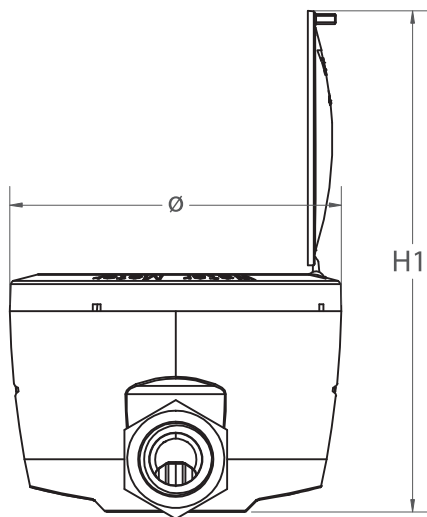

Notes:

- L is flow sensor length. L1 is the total length of flow sensor plus extension pieces.
- Weight does not include extension piece. It may vary.
- Dimension H, Φ1 and Φ2 are for reference only.



wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER

Approvals

OIML R49, ISO 4064, NSF61, MID

Electrical Data

| | |
|--------------------------|---|
| Power Supply: | Battery, 3.6V, Lithium |
| Replacement Interval: | >10 years at $t_{BAT} < 30^{\circ}\text{C}$ (86°F) |
| Power Consumption: | <0.1W |
| Backup Power Supply: | Internal SuperCap |
| Communication Interface: | M-Bus (default). Optional: RF 868MHz wMBus*, RF866MHz (India), RF 470MHz or RF 433MHz radio |
| CE approval: | EN61326-1:2006 |
| Electromagnetic Class: | E2 |


Accuracy / MPE (Maximum Permissible Error)

MPE according to ISO 4064: 2005 or OIML R49

± 2 in the range $Q_2 \leq Q < Q_4$; ± 5 in the range $Q_1 \leq Q \leq Q_2$ [for $T \leq 30^{\circ}\text{C}$ (85°F)]

Dynamic Range: 250 or 160

***Note:** for OMS-compliant wMBus, please contact support@spiremt.com for details.

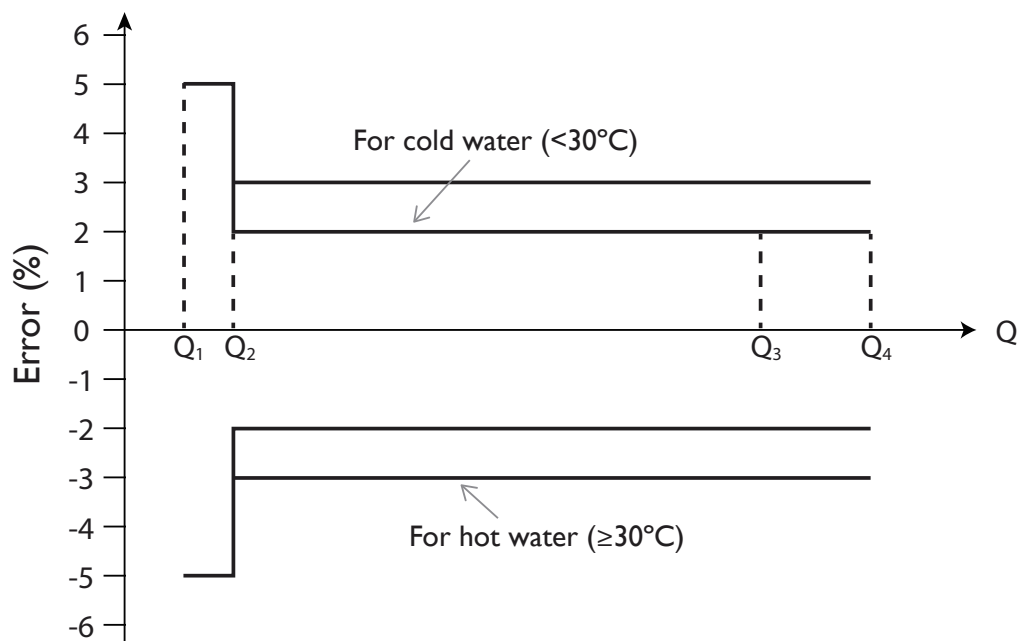



wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER


Mechanical Data

| |
|--|
| Metrological Class: 2 (according to ISO 4064: 2005 or OIML R49) |
| Environmental Class: B / C |
| Environmental Temp: 0 ~ 60°C (32 ~ 140°F) |
| Permissible Flow Temp: 0.1 ~ 50°C (35 ~ 122°F) for long term and up to 85°C (185°F) for short term |
| Enclosure Protection: IP68 |
| Integrator Detachable: No |
| Pressure: PN16 |

Pressure Loss

| |
|---|
| The pressure loss of a flow sensor is proportional to the square on the flow: $\Delta p = k \times Q^2$ |
| Here Δp is pressure loss, Q is volume flow rate and k is the coefficient. |
| The DN15 (½") meter has $k=0.067$ and Δp less than 0.48bar at Q_3 . |
| The DN20 (¾") meter has $k=0.019$ and Δp less than 0.27bar at Q_3 |
| The press losses for all the sizes meet the ISO 4064: 2005, OIML R49 and AWWA standards. |

Pressure Loss vs. Flowrate

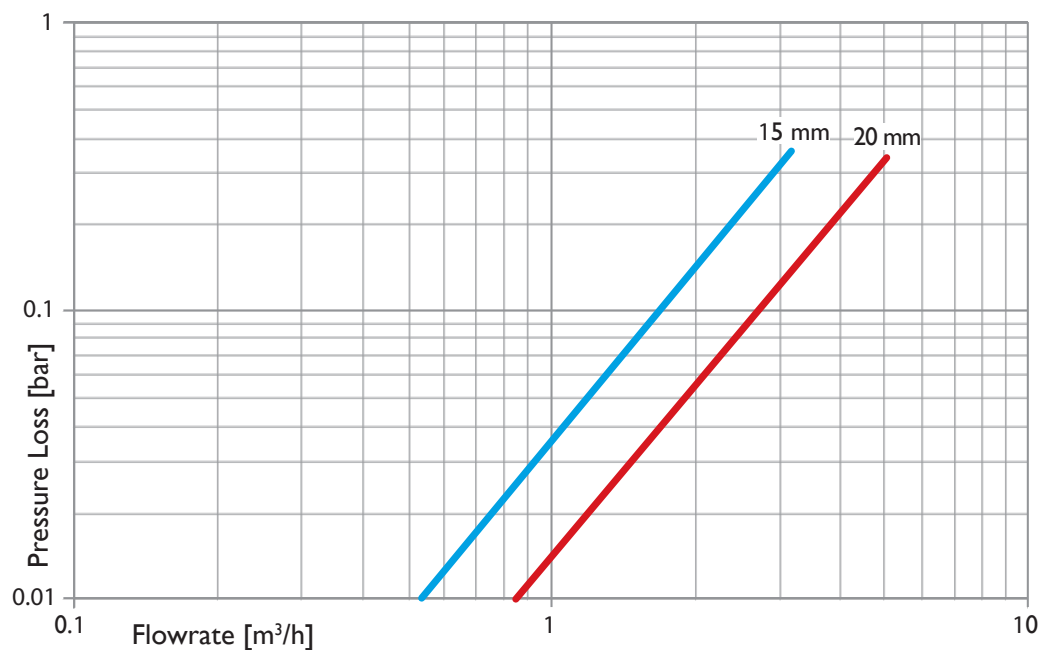



wPrime™ Series 280W-D

RESIDENTIAL ULTRASONIC WATER METER

Order Specifications

Base Unit

280W-D-SDN - -

Meter Size

| | |
|-----------|----|
| DN15 / ½" | 15 |
| DN20 / ¾" | 20 |

Output Interface

| | |
|-----------------------|---|
| Wired M-Bus (default) | 1 |
| RF868 | 2 |
| wMBus868 | 3 |
| RF866 | 4 |
| RF433 | 5 |

Nominal Flow Rate

| | |
|------------------------------------|---|
| 1.6 m³/h (available for DN15 only) | A |
| 2.5 m³/h | B |

About Spire Metering Technology

Formerly Shenitech, Spire Metering is a global leader in flow and energy management solutions. Through continuous innovation, we transform complex ultrasonic technology into affordable, reliable solutions for accurate flow and energy measurement. Spire Metering offers water, heat, electricity and gas meters as well as AMR/AMI solutions. To find out how we can help today, please tell us about your application.