



BRIGMAN

Deep Sea Technology

1600 Pennsylvania Ave NW
Washington DC
20500, United State



Software Requirements Specification (SRS)

Abyss Navigator Suite Project

Brigman Deep Sea Technology

March 18, 2026

Brigman Team Member	Department	Role	Employee ID
Muhammad Ridwan Putra Jasni	Requirements Engineering	Lead Business Analyst	BDST-RE-BA-001
Chng Zong Han	Requirements Engineering	Business Analyst	BDST-RE-BA-002
Lin Yuhao	Requirements Engineering	Business Analyst	BDST-RE-BA-003
Muhammad Mikhail Bin Mazlan	Requirements Engineering	Business Analyst	BDST-RE-BA-004
Kannan s/o Rajamohan	Requirements Engineering	Business Analyst	BDST-RE-BA-005

Table 1: Requirements Engineering Team – Brigman Deep Sea Technology



@brigman_deepsea



info@brigman.com



www.brigman.com



123-456-7890

Table of Contents

1	Introduction	4
1.1	Purpose	4
1.2	Document Conventions	4
1.3	Intended Audience and Reading Suggestions	4
1.4	Product Scope	4
2	Overall Description	4
2.1	Product Functions	4
2.2	User Classes and Characteristics	5
2.3	Operating Environment (Latest Tech)	5
2.4	Design and Implementation Constraints	5
2.5	User Documentation	5
2.6	Assumptions and Dependencies	5
3	Codification	5
3.1	Codification Rules	5
3.2	Requirement Attributes and Quality Tagging	6
4	Specific Requirements	6
4.1	Navigation & Mission Autonomy	6
4.2	Communications & Remote Operations	6
4.3	Safety & Recovery	7
4.4	Data Logging & Accountability	8
4.5	External Interface Requirements	9
4.6	Security & Governance	9
5	Technology Requirements (Latest Tech)	10
6	Quality Development Model	11
6.1	Alignment with McCall Quality Model	11
6.2	BDST Quality Features	11
7	Integrated Requirements Traceability Matrix (iRTM)	11
7.1	Traceability Governance Principles	11
7.2	Trace Type Legend	12
7.3	SDLC Trace Extension	14
8	Change Mitigation Protocol	14
8.1	8.1 Contingency Controls	14
8.2	8.2 Open Issue Controls	15
8.3	8.3 High-Risk Change Controls	15
9	Requirements Modeling	16
10	Sign-off	16
10.1	Vendor Authentication	16
10.2	Designated Approvers (Named; Signature Placeholders)	17
11	Declarations	17
	Repository Information	18

References	R-1
Glossary	G-1
To Be Determined (TBD) List	T-1
Figures	F-1
APPENDICES	A-1
Appendix A: Data Dictionary	A-1
Appendix B: Response Sequence	B-1
Appendix C: Response Sequence (Data Dictionary)	C-1
Addenda	An-1

Note on Hyperlinks: Throughout this document, all hyperlinks are displayed in [blue and underlined](#). These links are fully clickable in the PDF viewer and will navigate to the relevant section, requirement, or external resource.

1 Introduction

1.1 Purpose

This Software Requirements Specification (SRS) defines the software requirements for the **Abyss Navigator Suite**, an unmanned deep-sea submersible fleet control system for Triton Deepwater. It is intended to be the baseline agreement for design, implementation, verification, and change control.

1.2 Document Conventions

Template source. This SRS is structured using the *Software Requirements Specification* template by **Karl E. Wiegers (1999)** (provided in [References/srs_template-ieee.pdf](#)), adapted to incorporate the course rubric requirements (codification, iRTM, and change mitigation).

Normative language. All requirements use **shall** to indicate mandatory behavior.

Codification (mandatory). The following ID schemes are used throughout:

- **Software requirements:** <DOMAIN>-<FEATURE>-<NNN> (e.g., SAF-EMG-001).
- **Technology requirements:** TECH-<AREA>-<NNN> (e.g., TECH-PLAT-001).
- **Quality model features:** QUAL-<AREA>-<NNN> (e.g., QUAL-SAF-001).
- **iRTM entries:** RTM-<NNN> (e.g., RTM-001).
- **Change mitigation controls:** CHG-<AREA>-<NNN> (e.g., CHG-CONT-001, CHG-OISS-001, CHG-HRCC-001).

Priority levels. Priority is recorded as **Essential**, **Desirable**, or **Acceptable** to align with the Project Specification.

1.3 Intended Audience and Reading Suggestions

This SRS is intended for Triton Deepwater stakeholders, the Brigman development and verification teams, project management, and independent auditors. Readers should begin with Sections 1–3 (scope, constraints, codification) before using Section 4 (requirements) and Sections 7–8 (traceability and change mitigation).

1.4 Product Scope

The Abyss Navigator Suite enables unmanned missions executed autonomously, remotely supervised from a surface or mothership environment, with controlled intervention, safe emergency handling, and operational traceability.

2 Overall Description

2.1 Product Functions

At a high level, the system provides:

- Mission planning and autonomous execution for unmanned deep-sea missions.
- Remote monitoring, operator alerting, and controlled remote intervention.
- Fleet-level supervision for multiple submersibles concurrently.

- Emergency detection, safe-state transition, and recovery coordination.
- Secure operational data management, logging, and post-mission traceability.

2.2 User Classes and Characteristics

- **Mission Supervisor:** monitors mission progress and authorizes intervention.
- **Fleet Operator:** manages multi-vehicle assignments and scheduling.
- **Safety & Compliance Officer:** reviews anomalies, audits logs, and ensures governance obligations are met.
- **System Administrator:** manages credentials, configuration, and system health.
- **Data Analyst:** exports mission data for downstream analysis.

2.3 Operating Environment (Latest Tech)

The operating environment is characterized by remote supervision from a mothership environment and constrained connectivity to submersibles. The vendor-selected software platform is described in Section 5. Key operating constraints include:

- Underwater communications may be intermittent and low-bandwidth.
- Extreme pressure and low visibility increase reliance on sensor-driven autonomy.
- Operational data is safety- and audit-relevant and must be protected.

2.4 Design and Implementation Constraints

The following constraints apply:

- **Remote operations context:** mission supervision and control are performed remotely from surface/mothership environments.
- **Communications constraints:** the system must operate under constrained bandwidth/latency and intermittent connectivity.
- **Security and governance:** operational data protection and auditability are required.
- **Safety-first policy:** failures and abnormal conditions must bias toward safe-state behavior.

2.5 User Documentation

The following documentation shall be delivered with the software:

- Operator manual (mission planning, supervision, interventions, safety procedures).
- System administration guide (credentials, configuration, deployment).
- Interface/API guide for integrating Triton-provided sensors and external systems.

2.6 Assumptions and Dependencies

- Triton provides mission sensors and their interface specifications for integration.
- Missions are supervised by trained and authorized personnel.
- Regulatory obligations apply to maritime safety and data governance.

3 Codification

3.1 Codification Rules

Requirement IDs are stable across revisions. The numeric suffix increments only when a new requirement is added; edited requirements retain their IDs to preserve traceability in the iRTM.

3.2 Requirement Attributes and Quality Tagging

Each requirement in Section 4 is recorded with:

- **Source:** originating Project Specification clause(s) (e.g., B0-L1-4, IT-L0-C3).
- **Priority:** Essential / Desirable / Acceptable.
- **Quality tags:** one or more QUAL-* IDs from Section 6.
- **Verification:** inspection, analysis, test, or demonstration.
- **Use Case link:** reference to the primary use case(s) in Figure 1 (numbered UC01, UC02, ...) that realize or exercise the requirement.

4 Specific Requirements

4.1 Navigation & Mission Autonomy

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
NAV-PLAN-001	Essential	BO-L1-1	QUAL-OPS-001, QUAL-TRC-001	Upon submission by an authorized operator, the system shall create and version-control a mission plan record containing an ordered set of waypoints (latitude, longitude, depth) and mission phases, creating a new version record upon each subsequent modification.	Demo: Create/edit/version plan; inspect stored plan versions.	UC01 (Mission planning)
NAV-EXEC-001	Essential	BO-L1-1, BO-L0-C1	QUAL-RES-001, QUAL-SAF-001	The system shall execute a validated mission plan autonomously without continuous human control for a full mission cycle in a representative simulation.	Test: End-to-end mission simulation with no operator commands.	UC02 (Autonomous mission execution)
NAV-WPT-001	Essential	BO-L1-1	QUAL-OPS-001	The system shall achieve 99% waypoint arrival success in which each reached waypoint is within ≤ 5 m horizontal and ≤ 2 m vertical error under representative sea-trial conditions.	Analysis: Compare logged track vs. waypoints across trials.	UC02 (Waypoint navigation)
NAV-FLEET-001	Desirable	BO-L1-3, IT-L1-3	QUAL-OPS-001, QUAL-RES-001	The system shall assign mission plans to and retrieve real-time status from at least 3 concurrently supervised submersibles within a single supervision session.	Test: Simulated 3-vehicle session; verify assignment and visibility.	UC03 (Supervise multiple vehicles)

Table 2: Navigation & Mission Autonomy Requirements

4.2 Communications & Remote Operations

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
COM-MON-001	Essential	BO-L1-2, IT-L1-1	QUAL-OPS-001	The system shall retrieve mission and vehicle status data and transmit telemetry updates to the operator interface at least once every 30 seconds when connectivity is available.	Test: Measure telemetry update intervals under nominal link.	UC04 (Monitor telemetry)
COM-INT-001	Essential	IT-L1-2, BO-L1-2	QUAL-OPS-001, QUAL-SAF-001	The system shall accept, execute, and record an acknowledgement for remote intervention commands (pause, resume, safe-state) issued by an authorized operator, delivering the acknowledgement within ≤ 60 seconds when link latency is ≤ 30 seconds.	Test: Command/ack timing under simulated 30s latency.	UC05 (Remote intervention)
COM-DEG-001	Essential	IT-L0-C2, IT-L1-6	QUAL-RES-001, QUAL-SAF-001	The system shall support safe operation under constrained communications, including operation at ≥ 1 kbps bandwidth, ≤ 30 s one-way latency, and intermittent connectivity, and shall enter safe-state if connectivity is lost continuously for > 10 minutes .	Test: Fault-inject bandwidth, latency, and outage; verify safe-state trigger.	UC06 (Handle degraded comms)

Table 3: Communications & Remote Operations Requirements

4.3 Safety & Recovery

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
SAF-EMG-001	Essential	BO-L1-4, BO-L2-4.1	QUAL-SAF-001, QUAL-OPS-001	The system shall detect pressure deviations $> \pm 5\%$ from nominal setpoint within 5 seconds .	Test: Inject simulated pressure spike; measure detection latency.	UC07 (Detect anomalies)
SAF-EMG-002	Essential	BO-L1-4, BO-L2-4.1	QUAL-SAF-001, QUAL-OPS-001	The system shall detect temperature deviations $> \pm 10\%$ from nominal within 10 seconds .	Test: Thermal chamber simulation or sensor-in-the-loop test.	UC07 (Detect anomalies)
SAF-EMG-003	Essential	BO-L1-4, BO-L2-4.1	QUAL-SAF-001, QUAL-OPS-001	The system shall detect power supply deviations $> \pm 15\%$ from nominal within 10 seconds .	Test: Power supply fault injection; measure detection latency.	UC07 (Detect anomalies)

Continued on next page

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
SAF-STATE-001	Essential	BO-L2-4.2	QUAL-SAF-001	Upon detection of any abnormal condition, the system shall transition the submersible to a safe operational state defined as neutral buoyancy, minimal power consumption, and active communication beacon.	Integration test: End-to-end emergency scenario.	UC08 (Enter safe state)
SYS-CONT-001	Essential	BO-L1-5	QUAL-RES-001, QUAL-SAF-001	When non-critical degradation occurs, the system shall continue the mission in a degraded mode while alerting the operator and logging the degradation event.	Test: Inject non-critical fault; confirm degraded continuation and alert/log.	UC09 (Continue in degraded mode)
SYS-TERM-001	Essential	BO-L1-5	QUAL-SAF-001, QUAL-TRC-001	When termination is required, the system shall terminate the mission in an orderly manner by completing the current operation when safe, logging the shutdown reason, and entering safe-state.	Test: Inject critical fault; verify ordered termination sequence.	UC10 (Terminate mission)
SYS-REC-001	Essential	BO-L1-5	QUAL-SAF-001, QUAL-OPS-001	The system shall autonomously initiate emergency retrieval procedures without operator command upon entry into safe-state due to critical failure. The system shall continuously broadcast a recovery beacon and expose last-known position and status to operators until recovery is confirmed.	Demo/Test: Simulate safe-state; verify beacon and status visibility.	UC11 (Coordinate recovery)

Table 4: Safety & Recovery Requirements

4.4 Data Logging & Accountability

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
DATA-LOG-001	Essential	BO-L1-6, IT-L1-5	QUAL-TRC-001	The system shall create a log record storing timestamp (UTC), vehicle ID, and operator ID for each mission event and each operator-issued action.	Inspection/Test: Review log records for required fields.	UC12 (Record operations)
DATA-LOG-002	Essential	IT-L1-5, IT-L0-C3	QUAL-SEC-001, QUAL-TRC-001	The system shall store each operational log record in append-only form, preventing modification or deletion after creation, and retain all records for a minimum of 5 years to support audit and investigation.	Inspection: Verify storage configuration and retention policy.	UC12 (Record operations)

Continued on next page

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
DATA-LOG-003	Essential	BO-L2-6.2, IT-L2-5.1	QUAL-OPS-001, QUAL-TRC-001	The system shall retrieve mission log records by mission ID and export them in CSV and JSON format within ≤2 minutes for missions of up to 24 hours in duration.	Test: Export timed retrieval under representative data volume.	UC13 (Retrieve/export records)
DATA-LOG-004	Desirable	BO-L1-7, BO-L2-6.2	QUAL-OPS-001	The system shall create and store a post-mission summary report containing mission timeline, detected anomalies, and operator interventions within ≤10 minutes of mission completion.	Test: Complete mission; measure report generation time and contents.	UC14 (Post-mission summary)

Table 5: Data Logging & Accountability Requirements

4.5 External Interface Requirements

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
INT-SENS-001	Essential	IT-L0-A1	QUAL-RES-001	The system shall ingest and validate sensor messages from customer-supplied mission sensors via ROS2 middleware and DDS transport against a documented JSON schema as defined in the Interface/API guide.	Test: Sensor-in-the-loop integration against the published schema.	UC15 (Sensor integration)

Table 6: External Interface Requirements

4.6 Security & Governance

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
SEC-ENC-001	Essential	IT-L0-C3, IT-L1-4	QUAL-SEC-001	The system shall protect operational data using AES-256 encryption for data at rest and for encrypted payloads in transit.	Inspection/Test: Verify crypto configuration and encrypted traffic capture.	UC16 (Protect data)
SEC-AUTH-001	Essential	IT-L0-C3, IT-L1-4	QUAL-SEC-001	The system shall enforce mutual authentication for system-to-system communications using X.509 certificates .	Test: Reject invalid/expired certificates; accept valid certificates only.	UC16 (Mutual authentication)

Continued on next page

Req ID	Priority	Source	Quality Tags	Requirement	Verification	Use Case Link
SEC-AUD-001	Essential	IT-L0-C3, BO-L0-C4	QUAL-SEC-001, QUAL-TRC-001	The system shall create an audit log record storing actor identity and timestamp for each access to operational data and each administrative configuration change.	Inspection/Test: Perform actions; confirm corresponding audit records.	UC17 (Audit access)
SEC-ACC-001	Essential	Vendor Provision	QUAL-SEC-001, QUAL-TRC-001	The system shall retrieve the permission set for each authenticated user's assigned role and permit or deny each requested operation accordingly.	Test: Attempt unauthorised actions per role; confirm access denial.	—
SEC-2FA-001	Desirable	Vendor Provision	QUAL-SEC-001	The system shall retrieve the configured two-factor authentication policy and enforce secondary verification during login, with 2FA enforced unconditionally for all administrative roles regardless of policy setting.	Test: Enable policy; confirm 2FA enforcement during login for administrative roles.	—
SEC-SES-001	Desirable	Vendor Provision	QUAL-SEC-001	The system shall retrieve the configured session timeout duration and terminate any session that has been inactive beyond that duration.	Test: Configure timeout; confirm automatic session termination after inactivity.	—

Table 7: Security & Governance Requirements

5 Technology Requirements (Latest Tech)

The following technology requirements define the intended operating platform, data store, and interface patterns selected by Brigman Deep Sea Technology to satisfy the Project Specification constraints.

Tech ID	Area	Specification
TECH-PLAT-001	Platform	Vehicle-side software components shall run on a Linux-based OS with ROS2 middleware support; mothership-side services shall support deployment on standard workstation/server environments.
TECH-DB-001	Database	The system shall store operational and mission records in a structured database that supports retention policies and encrypted storage (e.g., PostgreSQL or equivalent).
TECH-NET-001	Networking	The system shall support message transport compatible with constrained links (DDS where available) and shall support store-and-forward buffering during outages.
TECH-API-001	APIs	External and internal service interfaces shall use versioned JSON schemas and provide a documented API contract for integration and export.

Table 8: Technology requirements for operating environment and platform

6 Quality Development Model

Brigman Deep Sea Technology adopts BDST Quality Model v1.1, which is explicitly aligned with McCall's Software Quality Model (1977) across the three perspectives: Product Operation, Product Revision, and Product Transition.

6.1 Alignment with McCall Quality Model

McCall Perspective	McCall Feature	Covered by BDST Quality ID
Product Operation	Reliability	QUAL-SAF-001, QUAL-RES-001
Product Operation	Integrity	QUAL-SEC-001
Product Operation	Usability	QUAL-OPS-001
Product Operation	Correctness	NAV-WPT-001, SAF-EMG-001..003
Product Operation	Efficiency	COM-MON-001 (timing constraints)
Product Revision	Maintainability	TECH-API-001, TECH-DB-001
Product Revision	Testability	Verification column (Section 4)
Product Revision	Flexibility	SYS-CONT-001 (degraded mode handling)
Product Transition	Interoperability	INT-SENS-001
Product Transition	Portability	TECH-PLAT-001
Product Transition	Reusability	Modular API schema (TECH-API-001)

Table 9: Mapping of BDST Quality Model to McCall Quality Model

6.2 BDST Quality Features

- QUAL-SAF-001 (Safety Integrity): Measures detection latency, safe-state transition correctness, and recovery robustness under fault injection.
- QUAL-SEC-001 (Security & Governance): Measures encryption coverage, authentication enforcement, and audit completeness.
- QUAL-RES-001 (Resilience): Measures safe operation under degraded communications and abnormal conditions.
- QUAL-TRC-001 (Traceability): Measures reconstruction capability of mission timeline with actor attribution.
- QUAL-OPS-001 (Operability & Performance): Measures telemetry frequency, detection timing, intervention response, and report generation performance.

7 Integrated Requirements Traceability Matrix (iRTM)

The iRTM traces each Project Specification clause to the corresponding SRS requirement(s) or SRS section(s), using minimized paraphrases to preserve CRaM meaning while remaining concise.

7.1 Traceability Governance Principles

The iRTM establishes the initial chain-of-custody between the Project Specification (PS) and this SRS. It is governed by the following principles:

- Every PS clause shall map to at least one SRS requirement or SRS section.
- Every SRS requirement shall have a trace origin (PS clause or Vendor Provision).
- Requirement identifiers remain stable across revisions to preserve trace integrity.
- Outline numbering shall not be used for trace identification.
- The iRTM is an inception trace artifact and shall be extended during Design, Implementation, and Verification phases.

7.2 Trace Type Legend

Trace links in this iRTM are classified as:

- **DT (Direct Trace):** PS clause directly generates one or more SRS requirement IDs.
- **AT (Assumption Trace):** PS clause is captured as an assumption/dependency in the SRS, traced to the relevant SRS section.
- **VP (Vendor Provision):** Requirement introduced by the vendor as part of Specifying method (e.g., technology provisions, quality model provisions, change protocol).

iRTM ID	PS Ref	Trace Type	PS Clause (min.)	SRS Element	SRS Clause / Coverage (min.)
RTM-001	BO-L0-C1	DT	Unmanned operations at extreme depths.	NAV-EXEC-001	Autonomous execution without continuous human control.
RTM-002	BO-L0-C2	DT	Safety-first: eliminate human exposure.	SAF-STATE-001; SYS-TERM-001	Safe-state bias and orderly termination under risk.
RTM-003	BO-L0-C3	DT	Extreme pressure/low visibility/limited comm.	COM-DEG-001; SAF-EMG-001	Constrained-link behavior; abnormal detection.
RTM-004	BO-L0-C4	DT	Comply with maritime safety/data governance.	SEC-AUD-001; DATA-LOG-002	Auditable access and retained records.
RTM-005	BO-L0-A1	AT	Missions supervised by trained personnel.	Section 2.6	Operational assumption recorded (software supports supervision).
RTM-006	BO-L1-1	DT	Autonomous mission execution required.	NAV-PLAN-001; NAV-EXEC-001; NAV-WPT-001	Plan, autonomous execution, and waypoint performance.
RTM-007	BO-L1-2	DT	Remote mission oversight required.	COM-MON-001; COM-INT-001	Telemetry updates and remote interventions.
RTM-008	BO-L1-3	DT	Coordinated multi-submersible operation.	NAV-FLEET-001	Concurrent supervision and mission assignment.
RTM-009	BO-L1-4	DT	Handle abnormal/emergency conditions.	SAF-EMG-001..003; SAF-STATE-001	Detection thresholds and safe-state transition.

Continued on next page

iRTM ID	PS Ref	Trace Type	PS Clause (min.)	SRS Element	SRS Clause / Coverage (min.)
RTM-010	BO-L1-5	DT	Continue safely or terminate orderly.	SYS-CONT-001; SYS-TERM-001; SYS-REC-001	Degraded continuation, termination, recovery coordination.
RTM-011	BO-L1-6	DT	Accountability for mission activities/decisions.	DATA-LOG-001; SEC-AUD-001	Operator-attributed logging and auditability.
RTM-012	BO-L1-7	DT	Outputs usable for ops and analytics.	DATA-LOG-003; DATA-LOG-004	Exportable records and summary reporting.
RTM-013	BO-L2-4.1	DT	Abnormal conditions identifiable.	SAF-EMG-001..003	Defined abnormal thresholds and detection timing.
RTM-014	BO-L2-4.2	DT	Transition to safe state on critical.	SAF-STATE-001	Defined safe operational state behavior.
RTM-015	BO-L2-6.1	DT	Activities/decisions traceable.	DATA-LOG-001; SEC-AUD-001	Trace logs and audit logs with actor identities.
RTM-016	BO-L2-6.2	DT	Records support review/investigation.	DATA-LOG-002..004	Retention, export, and post-mission reporting.
RTM-017	IT-L0-C1	DT	Remote supervision/control context.	COM-MON-001; COM-INT-001	Remote monitoring and intervention functions.
RTM-018	IT-L0-C2	DT	Constrained bandwidth/latency/intermittent.	COM-DEG-001	Explicit bandwidth, latency, and outage thresholds.
RTM-019	IT-L0-C3	DT	Protect operational data per obligations.	SEC-ENC-001; SEC-AUTH-001; SEC-AUD-001	Encryption, authentication, audit.
RTM-020	IT-L0-A1	DT	Customer provides sensors for integration.	INT-SENS-001	ROS2/DDS/JSON-based sensor integration.
RTM-021	IT-L1-1	DT	Remote monitoring capability required.	COM-MON-001	Telemetry update rate requirement.
RTM-022	IT-L1-2	DT	Remote intervention capability required.	COM-INT-001	Remote command/ack requirement.
RTM-023	IT-L1-3	DT	Multi-vehicle supervision required.	NAV-FLEET-001	3-vehicle concurrent supervision.
RTM-024	IT-L1-4	DT	Protect confidentiality/integrity of data.	SEC-ENC-001; SEC-AUTH-001	Encryption and mutual authentication.
RTM-025	IT-L1-5	DT	Logging mission events and operator actions.	DATA-LOG-001..004	Logging, retention, export, reporting.
RTM-026	IT-L1-6	DT	Safe operation under degraded comm.	COM-DEG-001; SYS-CONT-001	Degraded comm handling and mission continuity.

Continued on next page

iRTM ID	PS Ref	Trace Type	PS Clause (min.)	SRS Element	SRS Clause / Coverage (min.)
RTM-027	IT-L2-5.1	DT	Logs sufficient for review/accountability.	DATA-LOG-003; DATA-LOG-004	Exportable records and review-ready reports.
RTM-028	Vendor Provision	VP	Vendor-defined technology stack and integration standards.	TECH-PLAT-001; TECH-DB-001; TECH-NET-001; TECH-API-001	Technology requirements introduced under the Specifying method.
RTM-029	Vendor Provision	VP	Vendor-defined quality development model.	QUAL-SAF-001; QUAL-SEC-001; QUAL-RES-001; QUAL-TRC-001; QUAL-OPS-001	Quality attributes structured under the McCall-aligned development model.
RTM-030	Vendor Provision	VP	Vendor-defined change-mitigation controls.	CHG-CONT-001..003; CHG-OISS-001..002; CHG-HRCC-001..004	Change governance introduced under Section 8.
RTM-031	Vendor Provision	VP	Access control and session governance provisions.	SEC-ACC-001; SEC-2FA-001; SEC-SES-001	Security governance introduced under Section 4.6.

Table 10: iRTM: Project Specification (PS) to SRS traceability

7.3 SDLC Trace Extension

The iRTM is an inception trace artifact. During subsequent SDLC phases, the trace matrix shall be extended with references to:

- Design Module Identifier (architecture/subsystem mapping)
- Test Case Identifier (verification and acceptance test cases)
- Repository Artifact Reference (implementation modules/commits)

No requirement shall progress to implementation without corresponding design and verification references.

8 Change Mitigation Protocol

This protocol implements all three change mitigation strategies defined in the Specifying methodology: anticipatory contingency controls, open issue controls, and high-risk change controls. All change mitigation items are codified under the scheme CHG-<AREA>-<NNN> as declared in Section [3](#).

8.1 Contingency Controls

All contingency-related change controls are codified under CHG-CONT-<NNN>. The following contingency controls are pre-approved and may be activated without contract renegotiation if triggering conditions occur.

- **CHG-CONT-001:** If regulatory obligations change during project execution, the baseline shall be reviewed and updated through formal impact analysis before implementation.

- Impact assessment required.
- Must be trace-linked in iRTM.
- Must update affected requirement IDs.
- **CHG-CONT-002:** If customer-provided sensor interfaces deviate from agreed specifications, integration shall be suspended until compatibility validation is completed.
 - Impact assessment required.
 - Must be trace-linked in iRTM.
 - Must update affected requirement IDs (INT-SENS-001).
- **CHG-CONT-003:** If communications constraints exceed defined thresholds, degraded-mode operation shall be activated and logged.
 - Impact assessment required.
 - Must be trace-linked in iRTM.
 - Must update affected requirement IDs (COM-DEG-001, SYS-CONT-001).

8.2 8.2 Open Issue Controls

Open issues shall be codified under CHG-OISS-<NNN>. Open issues are requirements not fully resolved at SRS baseline and subject to structured negotiation.

Issue ID	Description	Responsible Party	Kill Date
CHG-OISS-001	Final confirmation of regulatory audit retention duration is pending.	Vendor	30 days post-baseline
CHG-OISS-002	Final bandwidth constraint values subject to field validation.	Customer	45 days post-baseline

Table 11: Open Issue Controls Register

Open issues:

- Must not invalidate approved requirements.
- Must be resolved before baseline freeze.
- Must be tracked until closure.

8.3 8.3 High-Risk Change Controls

High-risk changes shall be codified under CHG-HRCC-<NNN>. High-risk changes include architectural modifications, safety-state logic changes, security mechanism replacement, and autonomy execution logic changes.

- **CHG-HRCC-001:** Any modification to safe-state transition logic requires dual review and regression validation.
- **CHG-HRCC-002:** Replacement of encryption mechanism requires security impact assessment and re-validation.
- **CHG-HRCC-003:** Changes affecting autonomous navigation behavior require simulation validation prior to deployment.
- **CHG-HRCC-004:** Changes affecting trace logging or auditability require trace matrix update before approval.

All high-risk changes require:

1. Formal impact analysis (safety, schedule, cost).
2. Stakeholder approval (Customer Safety Approver and Vendor Authenticator).
3. Trace update in iRTM.
4. Re-validation per Section [6](#).

9 Requirements Modeling

The following models are included to support stakeholder understanding and to maintain traceability between requirements and operational context.

- **Use Case Diagram** (Figure [1](#)) – depicts the consolidated actor–system interactions, covering all major use cases referenced throughout this SRS.
- **Data Dictionary** (Appendix [A](#)) – defines all data entities, their attributes, data types, constraints, and descriptions that underpin the system’s data model. Each entity is cross-referenced to the relevant use case flows in Appendix B and C.

Additional Project Specification models (e.g., organisation chart and roles/responsibilities) are either explicitly included within this SRS or incorporated via controlled cross-reference to the Project Specification appendices. All requirement-relevant models are either embedded within this SRS or cross-referenced to version-controlled artifacts in the Project Repository. No requirement-driving model exists outside trace governance control. All external references are locked to baseline-controlled versions.

10 Sign-off

10.1 Vendor Authentication

Name	Employee ID	Signature
Muhammad Ridwan Putra Jasni	BDST-RE-BA-001	
Chng Zong Han	BDST-RE-BA-002	
Lin Yuhao	BDST-RE-BA-003	
Muhammad Mikhail Bin Mazlan	BDST-RE-BA-004	
Kannan s/o Rajamohan	BDST-RE-BA-005	

Table 12: Vendor team sign-off (signatures provided)

10.2 Designated Approvers

Organization	Role	Name (Designated)	Signature (Designated)
Customer (Triton Deepwater)	Project Leader / Requirements Approver	Sarah Whitman	
Customer (Triton Deepwater)	Safety & Compliance Approver	Emily Carter	
Vendor (Brigman Deep Sea Technology)	Engineering Delivery Lead	Nathan Briggs	Signature pending
Vendor (Brigman Deep Sea Technology)	Verification & Validation Lead	Olivia Reyes	Signature pending

Table 13: Designated approvers (named individuals; executed signatures recorded in formal approval transmittal)

Named designated approvers and signature are maintained in this SRS baseline for governance visibility. Executed signatures may be recorded or updated in formal approval transmittal documentation. Approval authority remains role-based to preserve governance continuity across personnel changes.

11 Declarations

AI Tool Usage Declaration: We acknowledge the use of AI tools (including ChatGPT) to assist with language refinement, structural organisation, and clarity of presentation. Prompts were used to review section structure, improve wording, and improve document flow. The output was used solely to refine phrasing and presentation. We confirm that no AI-generated analytical content, traceability decisions, models, or technical conclusions have been presented as our own work. All requirements analysis, codification, and validation were performed by the team.

Originality Declaration: This Software Requirements Specification presents original requirements work by Brigman Deep Sea Technology. The BCIC framework is a proprietary methodology invented by Dr Kevin Anthony Jones and applied by us specifically to this project. All sources are cited in the References section.

Software Compliance Declaration: This SRS aligns with IEEE 830 principles and applies CRaM criteria (Correct, Relevant, Measurable) throughout requirements specification.

Software Scope Declaration: This SRS covers software requirements only. Hardware specifications and physical interfaces are customer-defined; the software integrates those components within the defined system boundary.

Academic Integrity Declaration: No plagiarism, unauthorised collaboration, or academic misconduct occurred in the preparation of this document.

Repository Information

PROJECT REPOSITORY

<https://github.com/Spooky312/The-Abyss-Navigation-Suite-INF2113>

SRS, models, and traceability artifacts maintained under version control

References

- Triton Deepwater, *Project Specification: The Abyss Navigator Suite*, ICT2113, 2026.
- Brigman Deep Sea Technology, *Software Requirements Analysis Report (BCIC Methodology)*, 2026.
- Kevin Anthony Jones, *Laborial Guide for Class Project: Reqs now & near future*, Dec 2025.
- Kevin Anthony Jones, *Guide Rubric for Assessment of Deliverables*, Jan 2026.
- Karl E. Wieggers, *Software Requirements Specification Template*, 1999.

Glossary

AES-256

Advanced Encryption Standard with 256-bit key length used for data encryption at rest and in transit.

Anomaly Alert

A system-generated notification triggered when operational parameters deviate beyond defined thresholds.

Append-Only Log

A logging mechanism where records can only be added and not modified or deleted, ensuring audit integrity.

Autonomous Execution

Mission execution performed without continuous human control, based on pre-configured mission plans.

Baseline (SRS Baseline)

The formally approved version of this SRS used as the reference point for design, implementation, and change control.

BCIC

Breakdown, Clarify, Interpret, Categorize — the requirements derivation method applied in this SRS.

Blackbox Logging

Redundant logging mechanism storing critical operational data both onboard the submersible and on the mothership for post-incident analysis.

CHG-⟨AREA⟩-⟨NNN⟩

Codification scheme used for change mitigation controls in Section 8.

COM-DEG-001

Requirement governing degraded communication handling and safe-state triggering under communication loss.

Constrained Communications

Operational context characterised by low bandwidth, high latency, and intermittent connectivity.

Contingency Control (CHG-CONT-*)

Pre-approved change control triggered by anticipated conditions such as regulatory updates or integration mismatches.

CRaM

Correct, Relevant, and Measurable — requirements organisation principle applied throughout this SRS.

DDS (Data Distribution Service)

Middleware transport protocol used for real-time, reliable, and scalable data exchange in distributed systems.

Degraded Mode

Operational state in which the mission continues with limited functionality while alerting operators and logging the condition.

Emergency Retrieval

Autonomous system-initiated ascent and recovery process triggered under catastrophic conditions.

Fault Injection

Testing technique involving deliberate introduction of faults to verify detection and recovery behaviour.

iRTM (Integrated Requirements Traceability Matrix)

Artifact mapping Project Specification clauses to SRS requirements, ensuring bidirectional traceability.

JSON Schema

Structured data definition format used for defining and validating message payloads.

McCall Quality Model

Software quality framework organising quality into Product Operation, Product Revision, and Product Transition perspectives.

Mission Plan

Version-controlled structured definition of waypoints and mission phases for autonomous execution.

Mission Run

An instantiated execution of a mission plan with runtime state tracking.

Mutual Authentication

Security mechanism requiring both communicating parties to validate each other using digital certificates.

Normative Language (“Shall”)

Mandatory wording used to indicate enforceable requirements.

Open Issue Control (CHG-OISS-*)

Codified unresolved requirement item tracked with a responsible party and kill date.

Operational Log Record

Timestamped record of mission or operator activity including attribution and severity classification.

Product Specification (PS)

Customer-issued specification forming the source baseline for vendor requirement derivation.

QUAL-⟨AREA⟩-⟨NNN⟩

Codification scheme for BDST Quality Model features aligned with McCall’s model.

Requirement ID Stability Rule

Rule stating that requirement identifiers remain unchanged across revisions to preserve traceability.

Role-Based Access Control (RBAC)

Access control mechanism restricting permissions based on assigned user roles.

ROS2

Robot Operating System version 2 middleware framework supporting distributed robotics applications.

Safe-State

Defined operational condition characterised by neutral buoyancy, minimal power consumption, and active communication beacon.

SDLC (Software Development Life Cycle)

Structured lifecycle including requirements, design, implementation, verification, and maintenance phases.

SEC-AUD-001

Requirement governing audit logging for access and configuration changes.

SEC-AUTH-001

Requirement governing X.509-based mutual authentication.

SEC-ENC-001

Requirement governing encryption of operational data.

Session Timeout

Security mechanism automatically terminating inactive sessions after a configured duration.

Specifying Method (Vendor Provision)

Requirements introduced by the vendor beyond the PS baseline (technology stack, quality model, governance).

Trace Type (DT / AT / VP)

Classification used in the iRTM: **DT** – Direct Trace; **AT** – Assumption Trace; **VP** – Vendor Provision.

Two-Factor Authentication (2FA)

Authentication mechanism requiring two independent verification factors.

UDS (Unmanned Deep-sea Submersible)

The autonomous deep-sea platform controlled by the Abyss Navigator Suite.

UTC (Coordinated Universal Time)

Standardised time reference used for all timestamped logs and mission records.

Vendor Provision (VP)

Requirement introduced by the vendor under the Specifying method rather than directly derived from the PS.

To Be Determined (TBD) List

- Final selection of database product/version for TECH-DB-001 (if different from PostgreSQL-equivalent).
- Final JSON schemas for INT-SENS-001 (to be published with the Interface/API guide).

Figures

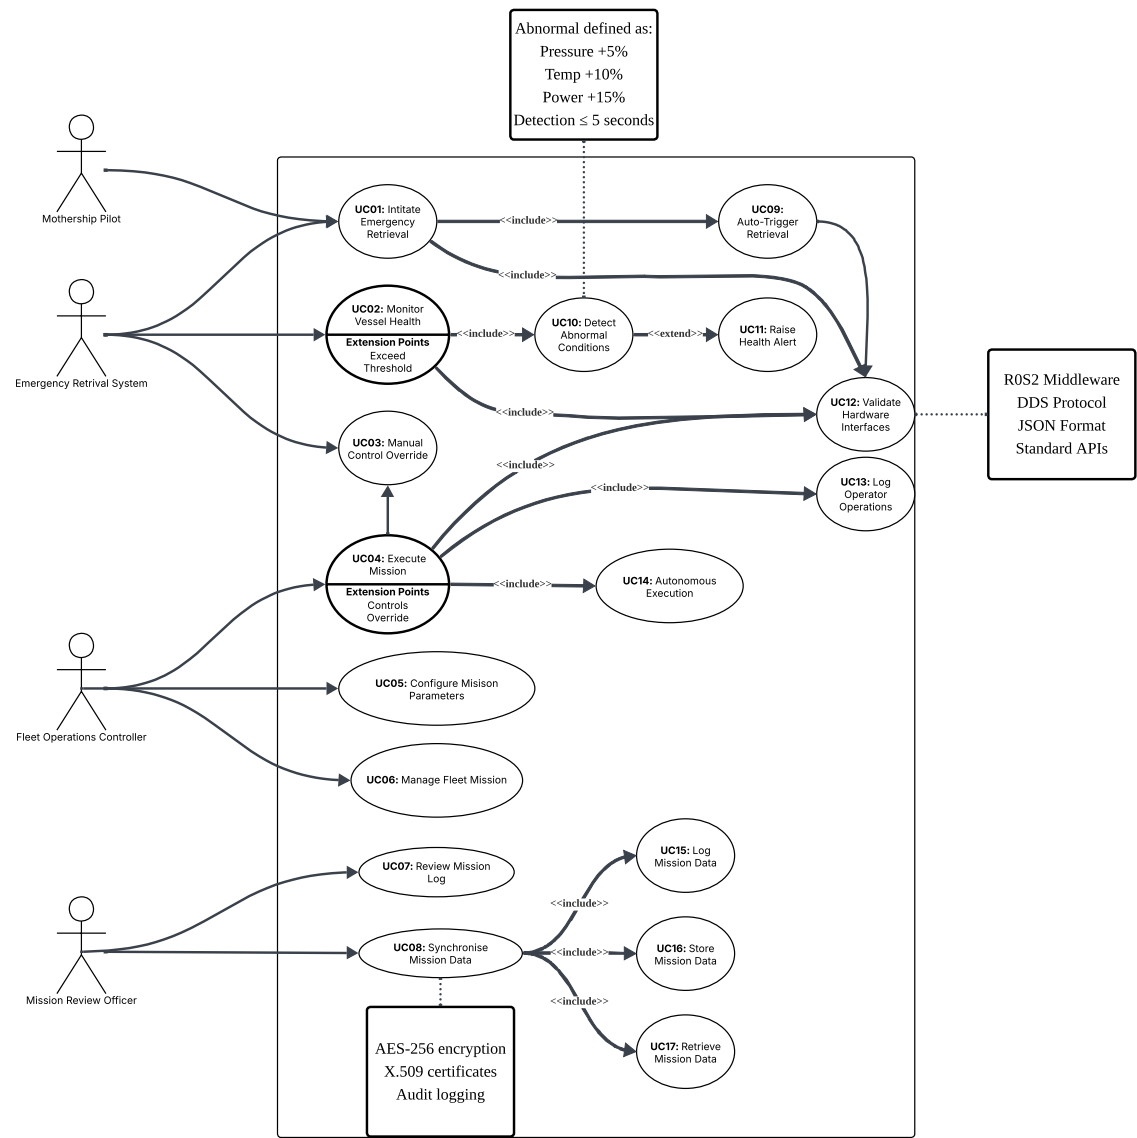


Figure 1: Use Case Diagram

Instructions

The diagram illustrates the primary actors (surface controller, mothership crew, autonomous submersible) and their interactions with major system functions such as mission planning, launch/recovery, sensor telemetry, fault handling, and data logging. Follow each actor’s swim lane to see how the mission progresses from preparation to post-mission data review; the colored connectors highlight safety-critical flows (emergency surfacing, manual override) that must remain available throughout operations.

APPENDICES

Appendix A: Data Dictionary

This section defines the data entities used by the system and the attributes that describe each entity.

<u>Entity: Operator</u>				
Attribute	Data Type	Length	Constraints	Description
OperatorID	VARCHAR	20	PK, NOT NULL, UNIQUE	Unique operator identifier used in UI (e.g., OP-2847)
Username	VARCHAR	50	NOT NULL, UNIQUE	Login username / operator ID entry
FullName	VARCHAR	100	NOT NULL	Display name shown in admin list
Role	ENUM	-	'Fleet Operator', 'Mission Supervisor', 'Safety & Compliance Officer', 'Data Analyst', 'System Administrator'	Selected user role
AccountStatus	ENUM	-	'Active', 'Inactive', 'Locked', 'Disabled'	Account status shown in admin UI
TwoFactorEnabled	BOOLEAN	-	NOT NULL, DEFAULT FALSE	Whether 2FA is enabled for this user
LastLoginUTC	TIMESTAMP	-	NULL	Last successful login time (UTC)
CreatedAtUTC	TIMESTAMP	-	NOT NULL	Record creation time (UTC)

Table A-1: Data dictionary for **Operator** entity

Entity: LoginSession				
Attribute	Data Type	Length	Constraints	Description
SessionID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique session identifier
OperatorID	VARCHAR	20	FK → Operator.OperatorID, NOT NULL	Logged-in user
LoginUTC	TIMESTAMP	-	NOT NULL	Login timestamp (UTC)
LogoutUTC	TIMESTAMP	-	NULL	Logout timestamp (UTC)
TwoFactorVerified	BOOLEAN	-	NOT NULL	Whether 2FA verification succeeded
SessionStatus	ENUM	-	'Active', 'Expired', 'Terminated'	Session state
IPAddress	VARCHAR	45	NULL	Optional login source IP address

Table A-2: Data dictionary for **LoginSession** entity

Entity: Vehicle				
Attribute	Data Type	Length	Constraints	Description
VehicleID	VARCHAR	20	PK, NOT NULL, UNIQUE	Vehicle identifier shown in UI (e.g., ASV-01)
DisplayName	VARCHAR	100	NOT NULL	Vehicle name shown (e.g., Deep Explorer)
OperationalStatus	ENUM	-	'Active', 'Paused', 'Safe-State'	Status shown on vehicle card
CurrentDepth_m	DECIMAL	(8,2)	NULL	Current depth (meters) shown on vehicle card
CurrentPower_pct	DECIMAL	(5,2)	NULL	Current power (percent) shown on vehicle card
CurrentPressure_bar	DECIMAL	(7,2)	NULL	Current pressure (bar) shown on vehicle card
CurrentTemp_c	DECIMAL	(5,2)	NULL	Current temperature (Celsius) shown on vehicle card
LastKnownLat	DECIMAL	(10,6)	NULL	Last known latitude
LastKnownLon	DECIMAL	(10,6)	NULL	Last known longitude
LastUpdateUTC	TIMESTAMP	-	NULL	Last telemetry update time (UTC)

Table A-3: Data dictionary for **Vehicle** entity

Entity: MissionPlan				
Attribute	Data Type	Length	Constraints	Description
MissionPlanID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique mission plan identifier
MissionName	VARCHAR	120	NOT NULL	Mission name shown in UI (e.g., Hydrothermal Survey 12B)
Version	VARCHAR	10	NOT NULL	Mission plan version (e.g., 1.3)
TargetVehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Selected target vehicle
EstimatedDurationHours	DECIMAL	(4,1)	NULL	Estimated duration (hours) shown in UI
Status	ENUM	-	'Draft', 'Deployed', 'Archived'	Mission plan status shown in summary
CreatedBy	VARCHAR	20	FK → Operator.OperatorID, NOT NULL	Creator of the plan
CreatedAtUTC	TIMESTAMP	-	NOT NULL	Creation time (UTC)
UpdatedAtUTC	TIMESTAMP	-	NULL	Last update time (UTC)

Table A-4: Data dictionary for **MissionPlan** entity

Entity: Waypoint				
Attribute	Data Type	Length	Constraints	Description
WaypointID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique waypoint identifier
MissionPlanID	VARCHAR	36	FK → MissionPlan.MissionPlanID, NOT NULL	Mission plan this waypoint belongs to
SequenceNo	INTEGER	5	NOT NULL	Waypoint order (supports reordering in UI)
Latitude	DECIMAL	(10,6)	NOT NULL	Waypoint latitude
Longitude	DECIMAL	(10,6)	NOT NULL	Waypoint longitude
Depth_m	DECIMAL	(8,2)	NOT NULL	Target depth at this waypoint (meters)
Phase	ENUM	-	'Transit', 'Survey', 'Sample'	Operational phase selected in UI

Table A-5: Data dictionary for **Waypoint** entity

Entity: MissionRun				
Attribute	Data Type	Length	Constraints	Description
MissionID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique mission execution identifier
MissionPlanID	VARCHAR	36	FK → MissionPlan.MissionPlanID, NOT NULL	Mission plan deployed
VehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle executing mission
StartUTC	TIMESTAMP	-	NOT NULL	Mission start time (UTC)
EndUTC	TIMESTAMP	-	NULL	Mission end time (UTC)
State	ENUM	-	'Running', 'Completed', 'Paused', 'Safe-State', 'Terminated'	Mission execution state
WaypointSuccess_pct	DECIMAL	(5,2)	NULL	Waypoint success rate (percent)

Table A-6: Data dictionary for **MissionRun** entity

Entity: TelemetrySnapshot				
Attribute	Data Type	Length	Constraints	Description
TelemetryID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique telemetry record
MissionID	VARCHAR	36	FK → MissionRun.MissionID, NOT NULL	Mission reference
VehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle reference
TimestampUTC	TIMESTAMP	-	NOT NULL	Time telemetry recorded (UTC)
Depth_m	DECIMAL	(8,2)	NOT NULL	Depth (meters) shown on vehicle card
Power_pct	DECIMAL	(5,2)	NOT NULL	Power (percent) shown on vehicle card
Pressure_bar	DECIMAL	(7,2)	NOT NULL	Pressure (bar) shown on vehicle card
Temp_c	DECIMAL	(5,2)	NOT NULL	Temperature (Celsius) shown on vehicle card
Latitude	DECIMAL	(10,6)	NOT NULL	Latitude shown on vehicle card and map
Longitude	DECIMAL	(10,6)	NOT NULL	Longitude shown on vehicle card and map
PayloadJSON	JSON	-	NULL	Optional raw payload for extensibility

Table A-7: Data dictionary for **TelemetrySnapshot** entity

Entity: CommsLinkSnapshot				
Attribute	Data Type	Length	Constraints	Description
LinkSnapID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique communications snapshot
MissionID	VARCHAR	36	FK → MissionRun.MissionID, NOT NULL	Mission reference
TimestampUTC	TIMESTAMP	-	NOT NULL	Snapshot time (UTC)
LinkType	ENUM	-	'Satellite', 'Acoustic', 'RF'	Communication link type used
ConnectionStatus	ENUM	-	'Connected', 'Degraded', 'Disconnected'	Link connection status
LinkQuality_pct	DECIMAL	(5,2)	NOT NULL	Link quality (percent) shown in UI
Bandwidth_mbps	DECIMAL	(6,2)	NOT NULL	Bandwidth (Mbps) shown in UI
Latency_ms	INTEGER	6	NOT NULL	Latency (ms) shown in UI

Table A-8: Data dictionary for **CommsLinkSnapshot** entity

Entity: InterventionCommand				
Attribute	Data Type	Length	Constraints	Description
CommandID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique command identifier
MissionID	VARCHAR	36	FK → MissionRun.MissionID, NOT NULL	Related mission
TargetVehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle receiving the command
IssuedBy	VARCHAR	20	FK → Operator.OperatorID, NOT NULL	Operator who issued the command
CommandType	ENUM	-	'Pause', 'Resume', 'Safe-State'	Command type from the dashboard controls
IssuedAtUTC	TIMESTAMP	-	NOT NULL	Command issued time (UTC)
CommandStatus	ENUM	-	'Sent', 'Acknowledged', 'Failed'	Command delivery outcome
AckReceivedAtUTC	TIMESTAMP	-	NULL	Acknowledgement received time (UTC)
FailureReason	VARCHAR	255	NULL	Reason if command failed

Table A-9: Data dictionary for **InterventionCommand** entity

Entity: BaselineProfile				
Attribute	Data Type	Length	Constraints	Description
BaselineID	VARCHAR	36	PK, NOT NULL, UNIQUE	Baseline profile identifier
VehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle baseline applies to
MetricType	ENUM	-	'Power', 'Pressure', 'Temp'	Metric being compared against baseline
BaselineValue	DECIMAL	(8,2)	NOT NULL	Baseline reference value
EffectiveFromUTC	TIMESTAMP	-	NOT NULL	Start of validity (UTC)
EffectiveToUTC	TIMESTAMP	-	NULL	End of validity (UTC)

Table A-10: Data dictionary for **BaselineProfile** entity

Entity: AnomalyAlert				
Attribute	Data Type	Length	Constraints	Description
AlertID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique anomaly alert identifier
MissionID	VARCHAR	36	FK → MissionRun.MissionID, NOT NULL	Mission where anomaly occurred
VehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle involved
AlertType	ENUM	-	'Power', 'Pressure', 'Temp', 'Comms'	Alert type
Deviation_pct	DECIMAL	(6,2)	NOT NULL	Deviation from baseline (percent)
Severity	ENUM	-	'INFO', 'WARNING', 'CRITICAL'	Severity level shown in UI
DetectedAtUTC	TIMESTAMP	-	NOT NULL	Detection time (UTC)
Status	ENUM	-	'Open', 'Acknowledged', 'Resolved'	Alert lifecycle state
ReviewedBy	VARCHAR	20	FK → Operator.OperatorID, NULL	Operator who reviewed/responded
ReviewedAtUTC	TIMESTAMP	-	NULL	Review time (UTC)

Table A-11: Data dictionary for **AnomalyAlert** entity

Entity: OperationalLogRecord				
Attribute	Data Type	Length	Constraints	Description
LogID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique log record
TimestampUTC	TIMESTAMP	-	NOT NULL	Timestamp (UTC) shown in data logs
MissionID	VARCHAR	36	FK → MissionRun.MissionID, NULL	Optional mission context
VehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NOT NULL	Vehicle ID shown in data logs
OperatorID	VARCHAR	20	FK → Operator.OperatorID, NULL	Operator ID shown in data logs (if applicable)
EventType	VARCHAR	50	NOT NULL	Event type shown in data logs
Description	TEXT	-	NOT NULL	Event description shown in data logs
Severity	ENUM	-	'INFO', 'WARNING', 'CRITICAL'	Severity badge and filter

Table A-12: Data dictionary for **OperationalLogRecord** entity

Entity: ReportingJob				
Attribute	Data Type	Length	Constraints	Description
JobID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique job identifier
JobType	ENUM	-	'ExportFilteredLogs', 'PostMissionReport', 'ExportFullAuditLog'	Type of reporting/export action
RequestedBy	VARCHAR	20	FK → Operator.OperatorID, NOT NULL	Requesting operator
RequestedAtUTC	TIMESTAMP	-	NOT NULL	Request time (UTC)
CompletedAtUTC	TIMESTAMP	-	NULL	Completion time (UTC)
ExportFormat	ENUM	-	'CSV', 'JSON'	Export format selected in UI
FilterVehicleID	VARCHAR	20	FK → Vehicle.VehicleID, NULL	Vehicle filter (if used)
FilterSeverity	ENUM	-	'INFO', 'WARNING', 'CRITICAL', NULL	Severity filter (if used)
SearchText	VARCHAR	120	NULL	Search keyword applied to logs (if used)
OutputLocation	VARCHAR	255	NULL	Saved output path/link
Status	ENUM	-	'Queued', 'Running', 'Completed', 'Failed'	Job processing status

Table A-13: Data dictionary for **ReportingJob** entity

Entity: AuditLogRecord				
Attribute	Data Type	Length	Constraints	Description
AuditID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique audit event
TimestampUTC	TIMESTAMP	-	NOT NULL	Timestamp shown in audit log (UTC)
OperatorID	VARCHAR	20	FK → Operator.OperatorID, NULL	Operator who performed the action (if applicable)
Action	VARCHAR	80	NOT NULL	Action performed (e.g., Login, Mission deployed, Safe-State initiated)
Resource	VARCHAR	80	NULL	Target resource (e.g., ASV-03, Dashboard, Mission-12A)
Outcome	ENUM	-	'SUCCESS', 'FAILED'	Outcome of the action
Details	TEXT	-	NULL	Optional additional details

Table A-14: Data dictionary for **AuditLogRecord** entity

Entity: Certificate				
Attribute	Data Type	Length	Constraints	Description
CertID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique certificate record
CertName	VARCHAR	100	NOT NULL	Certificate name shown in UI
Issuer	VARCHAR	100	NOT NULL	Certificate issuer shown in UI
CertType	ENUM	-	'X.509'	Certificate type
LastRenewedAtUTC	TIMESTAMP	-	NULL	Last renewal time (UTC), if applicable
ExpiresAtUTC	TIMESTAMP	-	NOT NULL	Expiry timestamp used to compute remaining validity

Table A-15: Data dictionary for **Certificate** entity

Entity: SystemHealthCheck				
Attribute	Data Type	Length	Constraints	Description
HealthID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique health record
ServiceName	VARCHAR	60	NOT NULL	Service name shown in system health panel
Status	ENUM	-	'HEALTHY', 'DEGRADED', 'DOWN'	Health status indicator
Uptime_pct	DECIMAL	(5,2)	NOT NULL	Service uptime (percent)
LastCheckSecAgo	INTEGER	6	NOT NULL	Time since last check (seconds) shown in UI
CheckedAtUTC	TIMESTAMP	-	NOT NULL	Measurement time (UTC)

Table A-16: Data dictionary for **SystemHealthCheck** entity

Entity: SecurityConfiguration				
Attribute	Data Type	Length	Constraints	Description
ConfigID	VARCHAR	36	PK, NOT NULL, UNIQUE	Unique configuration record
SessionTimeoutMin	INTEGER	4	NOT NULL	Session timeout value (minutes) selected in UI
TwoFactorPolicy	ENUM	-	'RequiredForAdmins', 'RequiredForAllUsers', 'Optional'	Two-factor authentication policy
PasswordPolicy	ENUM	-	'Standard', 'HighSecurity90Days'	Password policy selection
UpdatedBy	VARCHAR	20	FK → Operator.OperatorID, NOT NULL	Administrator who updated the settings
UpdatedAtUTC	TIMESTAMP	-	NOT NULL	Settings update time (UTC)

Table A-17: Data dictionary for **SecurityConfiguration** entity

Appendix B: Response Sequence

Use Case No.	Use Case Flow (Description)	Use Case End Goal
UC01 – Initiate Emergency Retrieval	Main Flow: 1. Pilot detects an emergency situation. 2. Pilot selects the emergency retrieval command. 3. System validates hardware interfaces. 4. System activates retrieval protocol. 5. Vessel begins return-to-surface procedure.	The vessel is safely retrieved during an emergency.
UC02 – Monitor Vessel Health	Main Flow: 1. System continuously receives vessel telemetry. 2. System checks pressure, temperature, and power levels. 3. System compares readings with safety thresholds. 4. System detects abnormal readings if thresholds are exceeded. 5. System prepares alerts for operators.	Vessel health is monitored continuously to detect issues early.
UC03 – Manual Control Override	Main Flow: 1. Operator selects the manual override option. 2. System verifies operator authorization. 3. System disables autonomous control temporarily. 4. Operator sends manual navigation commands.	Operator gains direct control of the vessel when necessary.
UC04 – Execute Mission Controls Override	Main Flow: 1. System receives manual control commands. 2. System validates command parameters. 3. System applies override to mission controls. 4. System logs operator actions. 5. Vessel executes the override instructions.	Mission continues under manual control safely.
UC05 – Configure Mission Parameters	Main Flow: 1. Fleet Controller opens mission configuration interface. 2. Controller enters mission parameters (depth, path, duration). 3. System validates parameter limits. 4. Controller confirms configuration. 5. System stores mission parameters.	Mission parameters are prepared for safe mission execution.
UC06 – Manage Fleet Mission	Main Flow: 1. Fleet Controller views fleet dashboard. 2. Controller assigns missions to vessels. 3. System distributes mission data to vessels. 4. Controller monitors fleet progress. 5. System updates fleet status in real time.	Multiple vessels are coordinated efficiently.
UC07 – Review Mission Log	Main Flow: 1. Mission Review Officer accesses mission log system. 2. Officer selects a completed mission. 3. System retrieves stored mission records. 4. System displays full mission timeline.	Mission performance is evaluated using stored logs.

Continued on next page

Use Case No.	Use Case Flow (Description)	Use Case End Goal
UC08 – Synchronise Mission Data	Main Flow: 1. System collects mission data from vessels. 2. System encrypts data using secure protocols. 3. System synchronizes data with control station servers. 4. System verifies successful synchronization. 5. System updates mission data repository.	Mission data remains consistent across all systems.
UC09 – Auto-Trigger Retrieval	Main Flow: 1. System detects abnormal operating conditions. 2. System evaluates emergency thresholds. 3. System automatically triggers retrieval protocol. 4. Vessel receives retrieval command. 5. Vessel begins safe recovery procedure.	Automatic safety retrieval occurs during critical failures.
UC10 – Detect Abnormal Conditions	Main Flow: 1. System continuously monitors sensor data. 2. System evaluates pressure, temperature, and power metrics. 3. System compares metrics to defined limits. 4. System identifies abnormal condition. 5. System notifies alert subsystem.	Abnormal system conditions are detected quickly.
UC11 – Raise Health Alert	Main Flow: 1. System receives abnormal condition signal. 2. System generates health alert notification. 3. Alert is displayed on operator dashboard. 4. System logs the alert event. 5. Operator reviews and decides next action.	Operators are notified of system health issues.
UC12 – Validate Hardware Interfaces	Main Flow: 1. System checks connected hardware modules. 2. System tests communication interfaces. 3. System verifies sensor availability. 4. System confirms interface compatibility. 5. System reports validation status.	Hardware readiness is verified before operations.
UC13 – Log Operator Operations	Main Flow: 1. Operator performs system action. 2. System captures action details. 3. System records timestamp and user identity. 4. System stores log entry securely. 5. Audit log is updated.	Operator activities are recorded for auditing.
UC14 – Autonomous Execution	Main Flow: 1. System loads configured mission parameters. 2. Vessel begins autonomous navigation. 3. System monitors execution progress. 4. System records telemetry data. 5. Mission continues until completion or interruption.	Vessel completes mission autonomously.

Continued on next page

Use Case No.	Use Case Flow (Description)	Use Case End Goal
UC15 – Log Mission Data	Main Flow: 1. System collects mission telemetry data. 2. System records sensor readings. 3. System timestamps each data entry. 4. Data is formatted for storage. 5. Log records are prepared for database storage.	Mission telemetry data is recorded during operations.
UC16 – Store Mission Data	Main Flow: 1. System receives mission log records. 2. System encrypts stored data. 3. System writes records to database storage. 4. System confirms successful storage. 5. Data repository is updated.	Mission data is securely stored in the system database.
UC17 – Retrieve Mission Data	Main Flow: 1. Officer requests mission data retrieval. 2. System searches mission database. 3. System retrieves requested data. 4. System formats data for display. 5. Data is presented to the officer.	Stored mission data becomes accessible for analysis.

Table B-1: Response Sequence: Use Case Flows

Appendix C: Response Sequence (Data Dictionary)

Data Dictionary Entity	Data Dictionary Flow (Description)	Data Dictionary End Goal
Operator	Main Flow: - Admin creates or updates an operator account (role, account status, 2FA). - System checks required fields and unique IDs/usernames. - System stores the operator record with created time. - System shows the operator in the admin user list. - Operator can be referenced by sessions, commands, logs, and audit records.	Operator identities exist to control access and attribute actions.
LoginSession	Main Flow: - Operator submits login credentials. - System verifies operator account and authorization. - If required, system verifies 2FA. - System creates a session record (login time, 2FA result, session state). - System updates the operator last-login time.	Login activity is tracked for access control and auditing.
Vehicle	Main Flow: - System registers vehicles using VehicleID and display name. - System receives telemetry readings (depth, power, pressure, temp, position). - System updates each vehicle's latest state for the live dashboard. - System stores last update time. - Operators view fleet status using the latest stored state.	Vehicles are identifiable and their latest live state is available for monitoring.
MissionPlan	Main Flow: - Fleet controller creates a mission plan (name, version). - Controller selects a target vehicle and enters mission settings (e.g., duration). - System validates inputs and stores the mission plan with creator details. - Mission plan is saved as Draft until deployment. - Mission plan can be deployed to create a mission run.	A validated mission plan is stored for later deployment and execution.
Waypoint	Main Flow: - Controller adds waypoints to a mission plan (lat, lon, depth, phase). - System assigns or updates waypoint order (sequence). - System validates waypoint values and stores them under the mission plan. - Waypoints can be reordered and saved again. - The mission plan holds an ordered route for the vehicle to follow.	An ordered mission route exists as waypoints linked to the mission plan.

Continued on next page

Data Dictionary Entity	Data Dictionary Flow (Description)	Data Dictionary End Goal
<u>MissionRun</u>	Main Flow: 1. System deploys a mission plan and creates a mission run record. 2. System records mission start time and initial state. 3. System updates state during operation (running/paused/safe-state/completed/terminated). 4. System records mission end time when the run ends. 5. System stores mission KPI summary (e.g., waypoint success percent).	Mission execution is tracked as a run with states, timing, and outcome summary.
<u>Telemetry-Snapshot</u>	Main Flow: 1. System receives telemetry during a mission run. 2. System timestamps each reading (UTC). 3. System stores depth, power, pressure, temp, and position per snapshot. 4. Each snapshot is linked to the mission run and vehicle. 5. Telemetry can be used for monitoring, alerts, and reporting.	Time-series telemetry is stored for traceability and analysis.
<u>CommsLink-Snapshot</u>	Main Flow: 1. System measures communications link metrics during operation. 2. System timestamps each link snapshot (UTC). 3. System stores link status, quality, bandwidth, and latency. 4. Each snapshot is linked to the mission run. 5. Operators view link health and degradation over time.	Communications health is tracked to support reliable operations.
<u>Intervention-Command</u>	Main Flow: 1. Operator selects a control action (pause/resume/safe-state). 2. System verifies operator authorization for the action. 3. System issues the command to the target vehicle. 4. System records delivery outcome (acknowledged/failed) with timestamps. 5. Command history supports review and accountability.	Manual control actions are recorded with attribution and outcomes.
<u>Baseline-Profile</u>	Main Flow: 1. System stores baseline values per vehicle and metric type. 2. Baselines have effective date range (from/to). 3. Monitoring logic uses the active baseline for comparisons. 4. Baselines can be updated by creating a new effective range. 5. Baselines support consistent deviation calculations.	Baseline references exist for detecting deviations from normal behaviour.
<u>AnomalyAlert</u>	Main Flow: 1. System detects abnormal readings based on rules/baselines. 2. System creates an alert with type, severity, deviation percent, and time. 3. Alert is shown to operators for review. 4. Operator can acknowledge or resolve the alert. 5. Review details (who/when) are stored for traceability.	Abnormal conditions are recorded and can be reviewed to support response.

Continued on next page

Data Dictionary Entity	Data Dictionary Flow (Description)	Data Dictionary End Goal
<u>Operational-LogRecord</u>	Main Flow: 1. A mission event or operator action occurs. 2. System records event type and description with UTC timestamp. 3. System links the record to vehicle and (if applicable) mission/operator. 4. System stores severity level for filtering. 5. Logs can be searched, filtered, and exported.	Operational events are stored for investigation, reporting, and review.
<u>ReportingJob</u>	Main Flow: 1. Operator requests an export/report (type + format + filters). 2. System stores the job request and sets status to queued/running. 3. System generates output (e.g., CSV/JSON export or post-mission report). 4. System records completion time and output location. 5. Job status updates to completed/failed.	Exports and reports are generated and tracked with job history and outputs.
<u>AuditLogRecord</u>	Main Flow: 1. A security-relevant action happens (login, deploy, safe-state, config change). 2. System records timestamp (UTC) and actor (if available). 3. System stores action, resource, and outcome (success/failed). 4. Audit records are retained for accountability. 5. Audit log can be exported if needed.	Security-sensitive activity is traceable through audit records.
<u>Certificate</u>	Main Flow: 1. System stores certificate identity and issuer details. 2. System records last renewed time when renewal occurs. 3. System stores expiry time for validity tracking. 4. UI can compute “expires in X days” from expiry time. 5. Certificate records support secure system communications.	Certificate validity is tracked so secure connections remain enforceable.
<u>SystemHealth-Check</u>	Main Flow: 1. System checks key services (database, telemetry, comms, authentication). 2. System sets status (healthy/degraded/down) with uptime percent. 3. System stores “seconds since last check” and measurement timestamp. 4. UI shows latest health status to operators. 5. Health history can support troubleshooting.	System services are monitored and stored for operational visibility.
<u>Security-Configuration</u>	Main Flow: 1. Admin selects session timeout, 2FA policy, and password policy. 2. System validates the settings. 3. System stores the configuration with updater and update time (UTC). 4. System enforces the updated policies for access and sessions. 5. Changes are traceable and can be audited.	Security policies are stored and enforced with clear change attribution.

Table C-1: Data Dictionary Response Sequence Flows

Addenda

Addendum ID	Statement
ADD-001	Project direction baseline: This SRS assumes the customer direction change to a fully unmanned, autonomous-first operating model is in force for all missions.
ADD-002	Cost redaction note: Any cost figures referenced from the Project Specification are treated as indicative and may be redacted in released versions to avoid biasing proposals.

Table An-1: Addenda (purpose-appropriate notes adopted from the Project Specification)