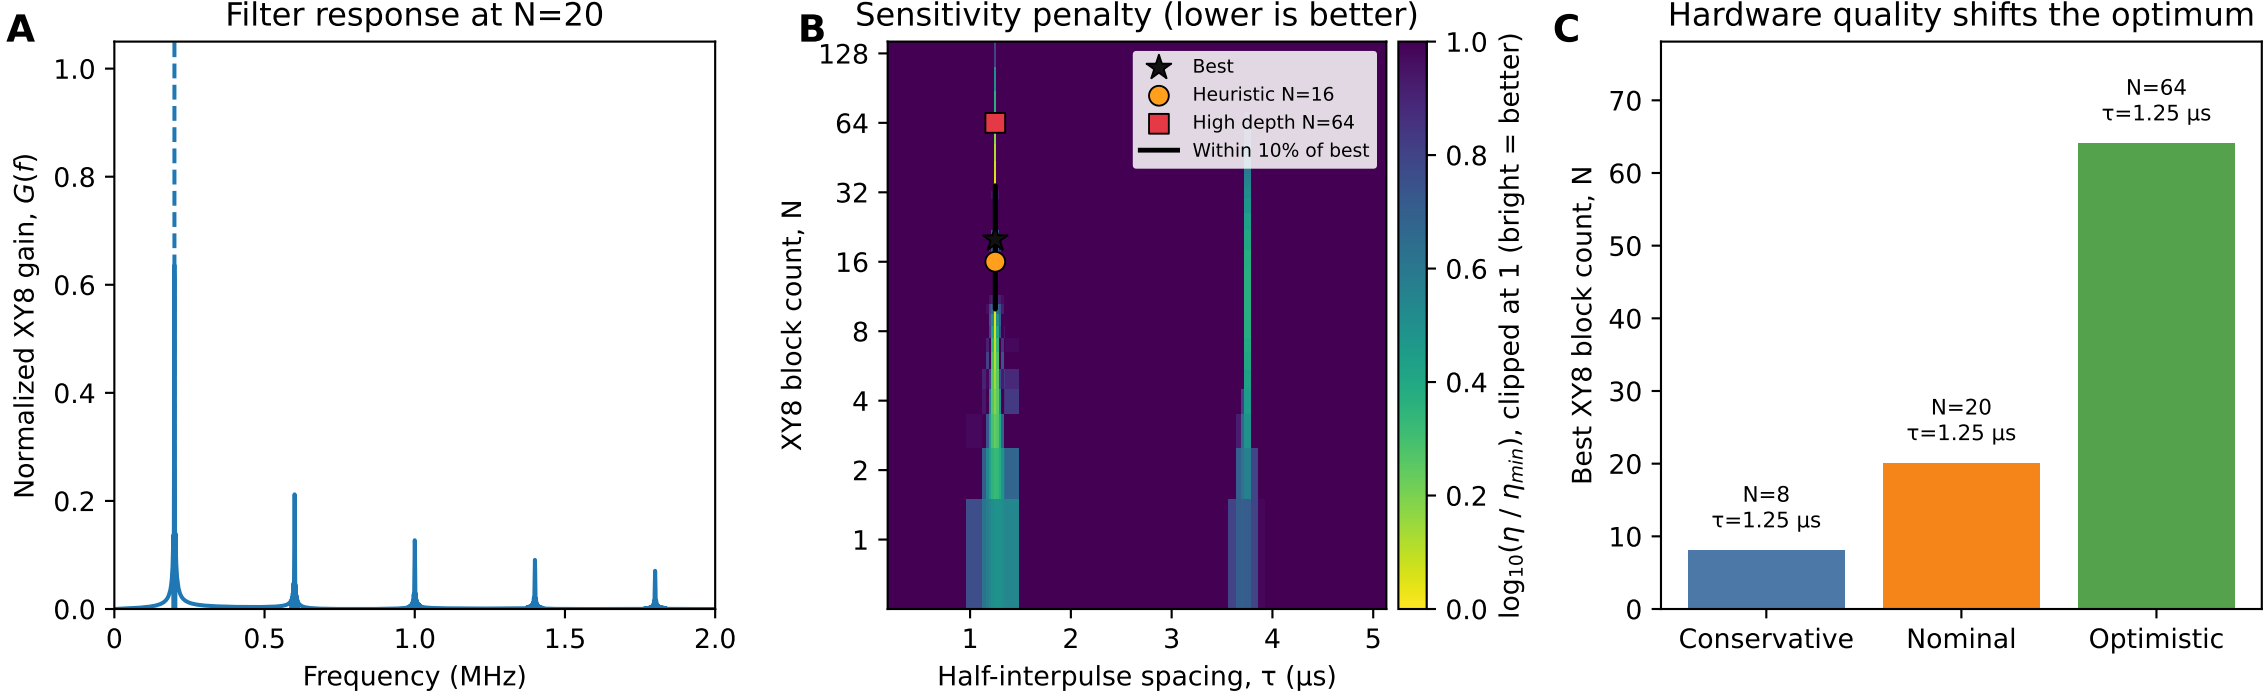
A
Filter response at N=20
Normalized XY8 gain, G(f)
Frequency (MHz)
B
Sensitivity penalty (lower is better)
XY8 block count, N
Half-interpulse spacing, τ (μs)
Best
Heuristic N=16
High depth N=64
Within 10% of best
log10(η / ηmin), clipped at 1 (bright = better)
C
Hardware quality shifts the optimum
Best XY8 block count, N
N=8
τ=1.25 μs
N=20
τ=1.25 μs
N=64
τ=1.25 μs
Conservative
Nominal
Optimistic