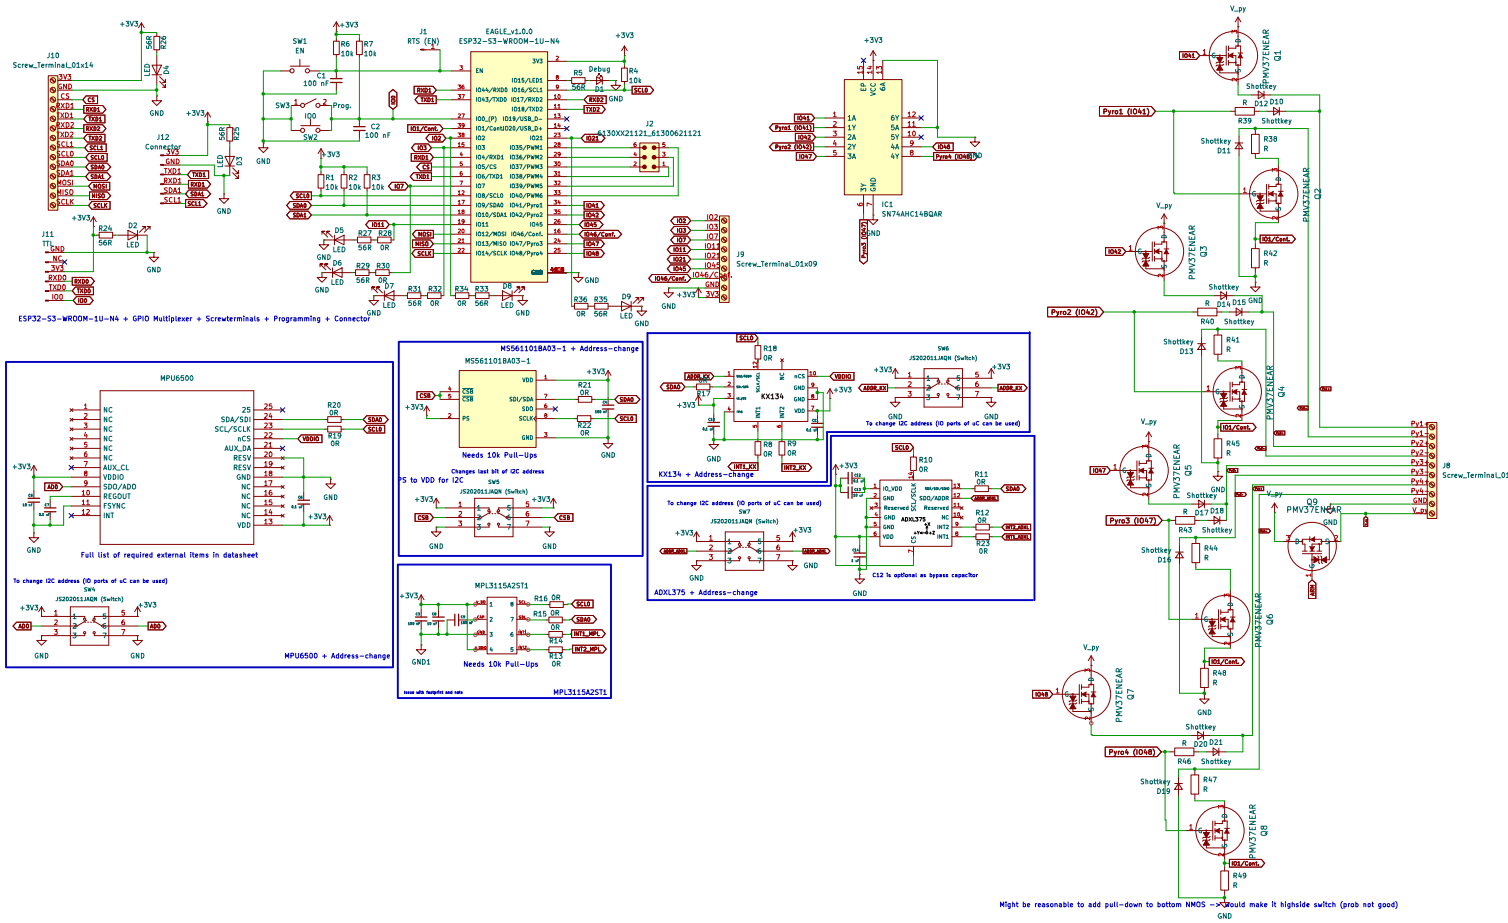

ESP32-S3-WROOM-1U-N4 + GPIO Multiplexer + Screwterminals + Programming + Connector
MPU6500
Full list of required external items in datasheet
To change I2C address (IO ports of uC can be used)
MPU6500 + Address-change
MS5611018A03-1 + Address-change
Changes last bit of I2C address
PS to VDD for I2C
Needs 10k Pull-Ups
MPL3115A2ST1
Needs 10k Pull-Ups
KX134 + Address-change
To change I2C address (IO ports of uC can be used)
ADXL375 + Address-change
C12 is optional as bypass capacitor
Might be reasonable to add pull-down to bottom NMOS -> would make it highside switch (prob not good)