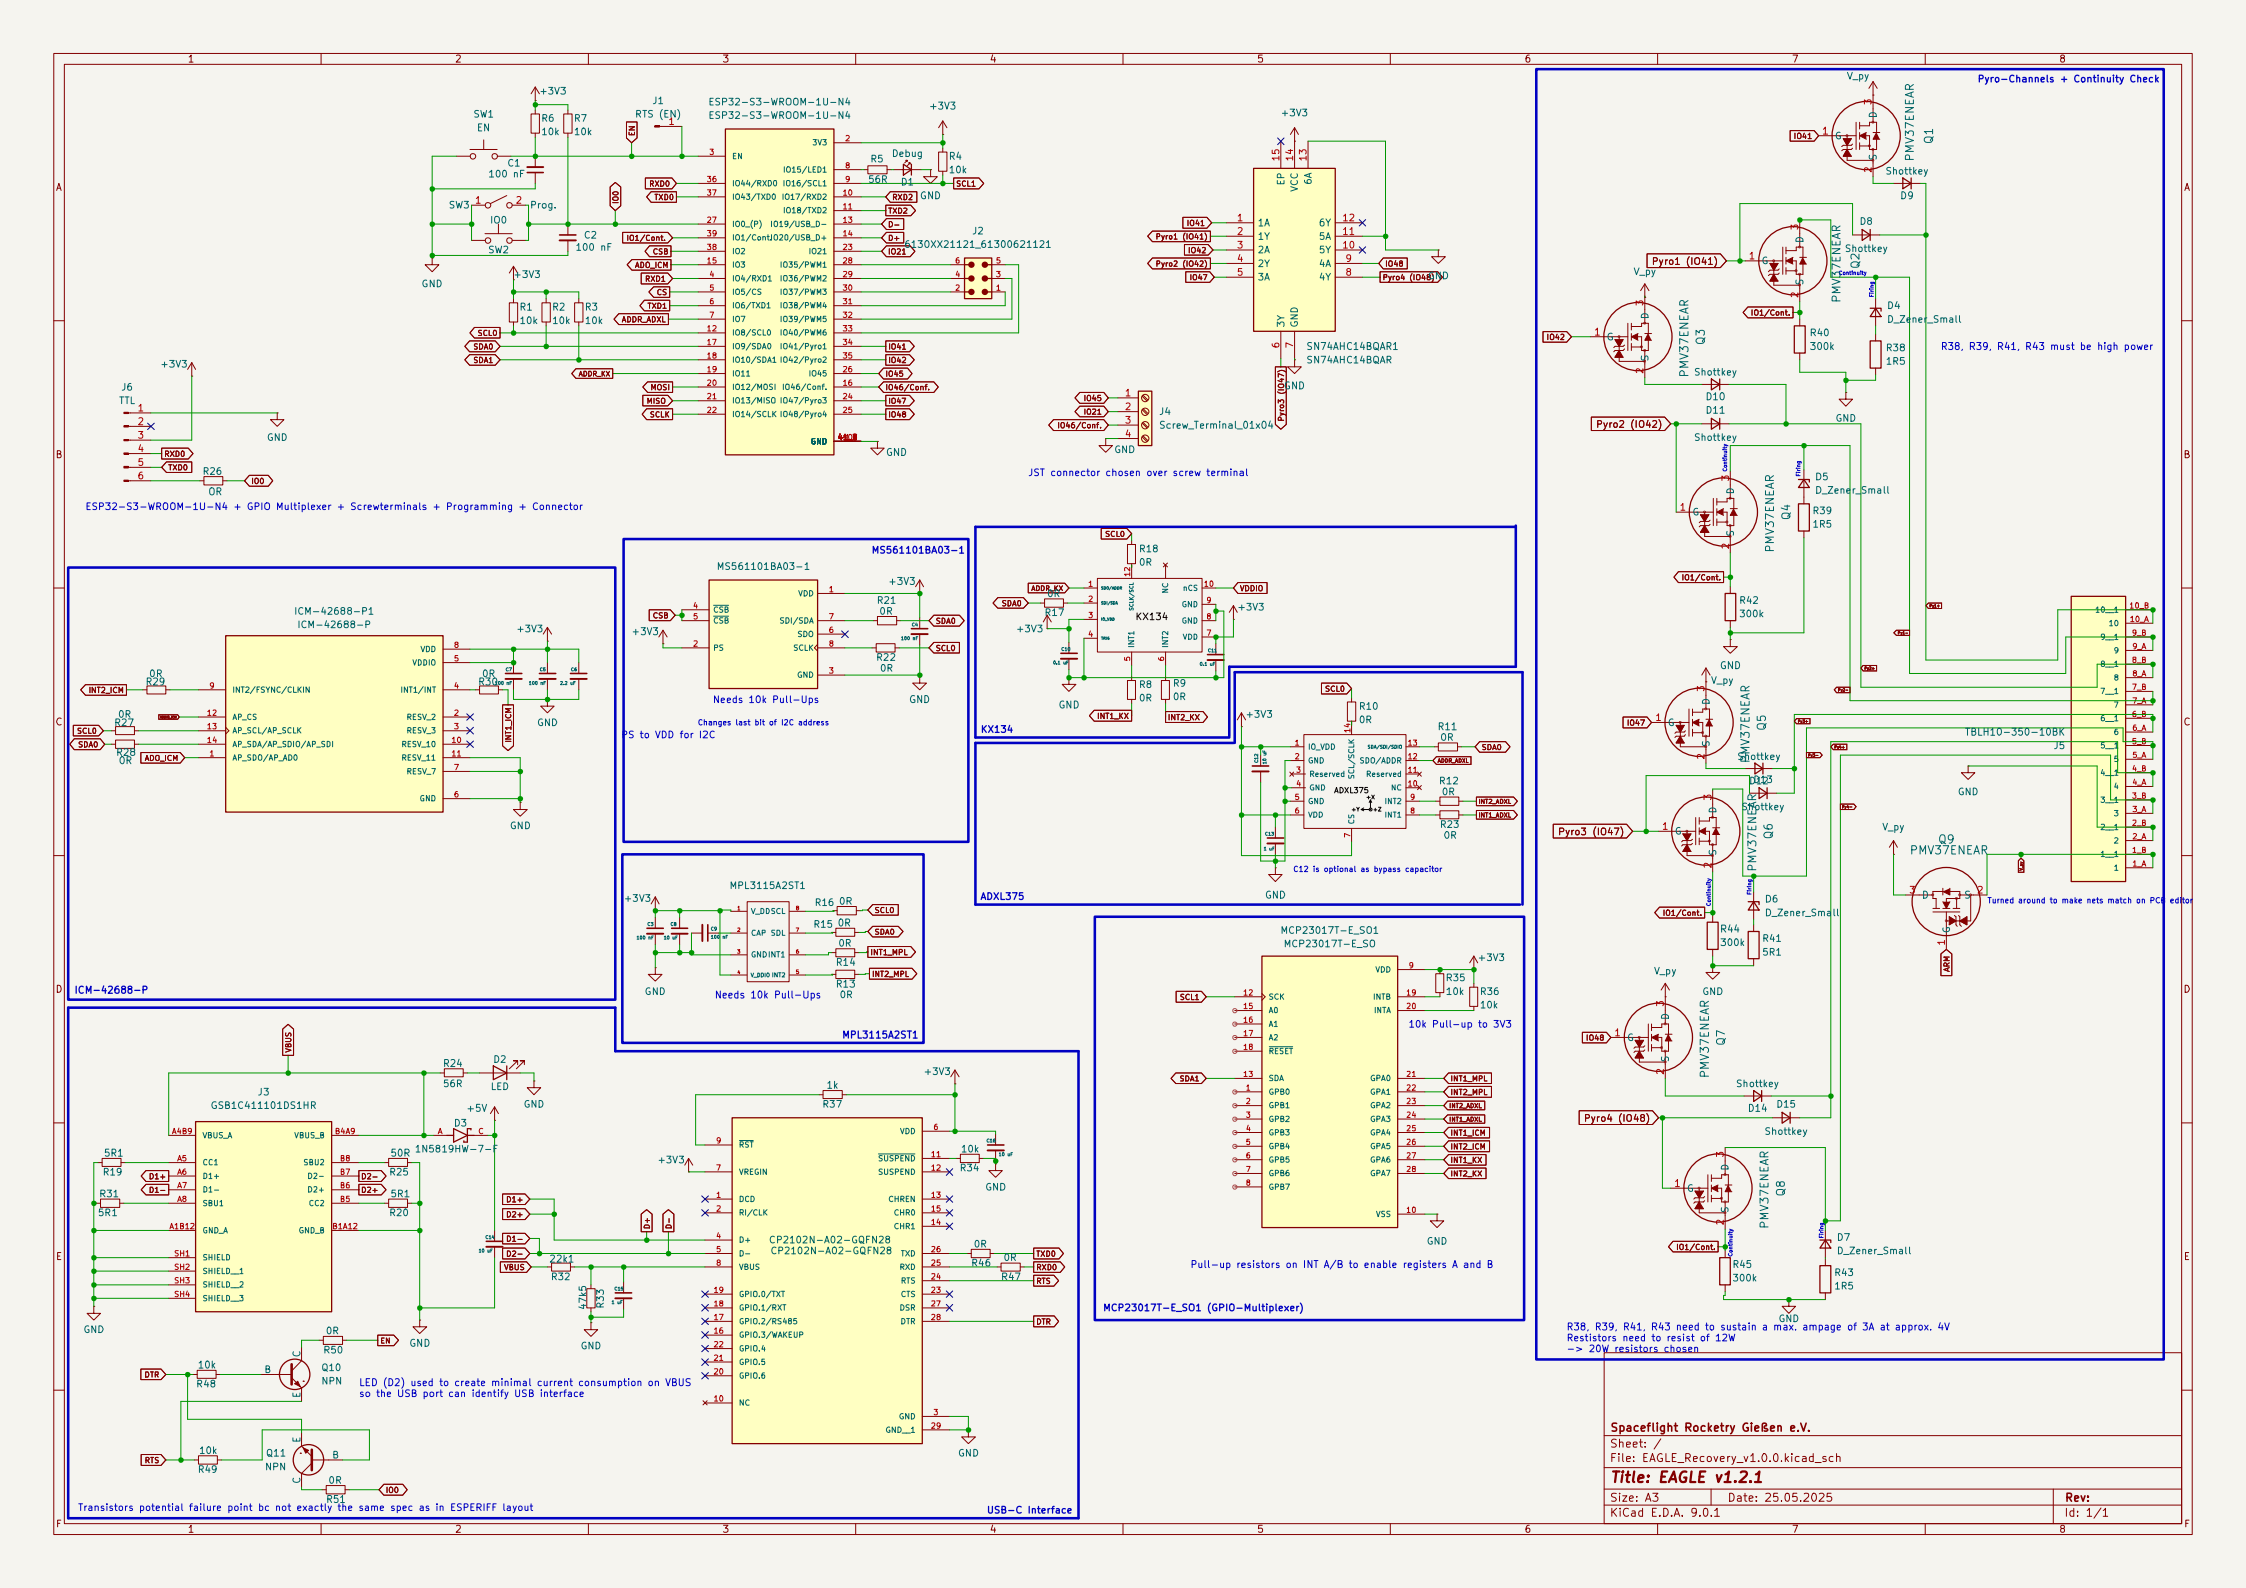

ESP32-S3-WROOM-1U-N4 + GPIO Multiplexer + Screwterminals + Programming + Connector
ESP32-S3-WROOM-1U-N4
JST connector chosen over screw terminal
SN74AHC14BQAR1
SN74AHC14BQAR
Pyro-Channels + Continuity Check
R38, R39, R41, R43 must be high power
TBLH10-350-10BK
Turned around to make nets match on PCB editor
R38, R39, R41, R43 need to sustain a max. ampage of 3A at approx. 4V
Reststors need to resist of 12W
-> 20W resistors chosen
MS561101BA03-1
Needs 10k Pull-Ups
Changes last bit of I2C address
PS to VDD for I2C
KX134
ADXL375
C12 is optional as bypass capacitor
ICM-42688-P
MPL3115A2ST1
MCP23017T-E_SO1 (GPIO-Multiplexer)
10k Pull-up to 3V3
Pull-up resistors on INT A/B to enable registers A and B
USB-C Interface
LED (D2) used to create minimal current consumption on VBUS
so the USB port can identify USB interface
Transistors potential failure point bc not exactly the same spec as in ESPERIFF layout
Spaceflight Rocketry Gießen e.V.
Sheet: /
File: EAGLE_Recovery_v1.0.0.kicad_sch
Title: EAGLE v1.2.1
Size: A3
Date: 25.05.2025
KiCad E.D.A. 9.0.1
Rev:
Id: 1/1