



# Zytel® ST801 NC010

## NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® ST801 NC010 is an Unreinforced, Super Toughened, Polyamide 66

### Product information

Resin Identification	PA66-HI	ISO 1043
Part Marking Code	>PA66-HI<	ISO 11469
ISO designation	ISO 16396-PA66-I,,M1G1L1NR,S14-020	

### Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	1.8/-	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.4/-	%	ISO 294-4, 2577

### Typical mechanical properties

	dry/cond.		
Tensile Modulus	2000/900	MPa	ISO 527-1/-2
Yield stress	50/43	MPa	ISO 527-1/-2
Yield strain	5.7/37	%	ISO 527-1/-2
Nominal strain at break	40/>50	%	ISO 527-1/-2
Flexural Modulus	1800/700	MPa	ISO 178
Flexural Strength	68/-	MPa	ISO 178
Charpy impact strength, 23°C	N/N	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	N/N	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	80/115	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	18/17	kJ/m <sup>2</sup>	ISO 179/1eA
Izod notched impact strength, 23°C	80/90	kJ/m <sup>2</sup>	ISO 180/1A
Izod notched impact strength, -30°C	20/20	kJ/m <sup>2</sup>	ISO 180/1A
Hardness, Rockwell, R-scale	112/89	-	ISO 2039-2
Poisson's ratio	0.4/0.45	-	

# Zytel® ST801 NC010

## NYLON RESIN

### Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	263/*	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	64/*	°C	ISO 75-1/-2
Temp. of deflection under load, 1.8 MPa, annealed	71/*	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	132/*	°C	ISO 75-1/-2
Ball pressure test	220/-	°C	IEC 60695-10-2
Coeff. of linear therm. expansion, parallel	120/*	E-6/K	ISO 11359-1/-2
CLTE, Parallel, 23-55°C(73-130°F)	120/-	E-6/K	ASTM E 831
Coeff. of linear therm. expansion, normal	90/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, Normal, 23-55°C (73-130°F)	90/-	E-6/K	ASTM E 831
RTI, electrical, 0.75mm	125	°C	UL 746B
RTI, electrical, 1.5mm	125	°C	UL 746B
RTI, electrical, 3mm	125	°C	UL 746B
RTI, impact, 0.75mm	75	°C	UL 746B
RTI, impact, 1.5mm	75	°C	UL 746B
RTI, impact, 3mm	75	°C	UL 746B
RTI, strength, 0.75mm	85	°C	UL 746B
RTI, strength, 1.5mm	85/*	°C	UL 746B
RTI, strength, 3mm	85	°C	UL 746B
Hot mandrel	0/-	-	IEC 60695-10-2

### Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB/*	class	IEC 60695-11-10
Thickness tested	1.5/*	mm	IEC 60695-11-10
UL recognition	yes/*	-	UL 94
Burning Behav. at thickness h	HB/*	class	IEC 60695-11-10
Thickness tested	0.81/*	mm	IEC 60695-11-10
UL recognition	yes/*	-	UL 94
Oxygen index	20/*	%	ISO 4589-1/-2
Glow Wire Flammability Index, 0.75mm	750/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	750/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	750/-	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	725/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	725/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	725/-	°C	IEC 60695-2-13
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)
Hot Wire Ignition, 0.75mm	9/*	s	UL 746A
Hot Wire Ignition, 1.5mm	15/*	s	UL 746A
Hot Wire Ignition, 3mm	20/*	s	UL 746A

# Zytel® ST801 NC010

## NYLON RESIN

### Electrical properties

	dry/cond.		
Relative permittivity, 100Hz	3.2/5.5	-	IEC 62631-2-1
Relative permittivity, 1MHz	2.9/3.2	-	IEC 62631-2-1
Dissipation factor, 100Hz	80/1800	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	140/550	E-4	IEC 62631-2-1
Volume resistivity	1E12/1E11	Ohm*m	IEC 62631-3-1
Surface resistivity	*/>1E15	Ohm	IEC 62631-3-2
Electric strength	31/-	kV/mm	IEC 60243-1
Comparative tracking index	600/-	-	IEC 60112
Arc Resistance	131/*	s	UL 746B
High Amperage Arc Ignition Resistance, 0.75 mm	200/*	arcs	UL 746A
High Amperage Arc Ignition Resistance, 1.5 mm	200/*	arcs	UL 746A
High Amperage Arc Ignition Resistance, 3 mm	200/*	arcs	UL 746A
High Voltage Arc Tracking Rate	7.6/*	mm/min	UL 746A

### Other properties

	dry/cond.		
Humidity absorption, 2mm	2/*	%	Sim. to ISO 62
Water absorption, 2mm	6.5/*	%	Sim. to ISO 62
Density	1080/-	kg/m <sup>3</sup>	ISO 1183
Density of melt	920	kg/m <sup>3</sup>	
Water Absorption, Immersion 24h	1.2/* <sup>1</sup>	%	Sim. to ISO 62
1: 3mm wall thickness			


### Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	290 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Max. screw tangential speed	0.3 m/s
Mold Temperature Optimum	80 °C
Min. mould temperature	50 °C
Max. mould temperature	100 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	4 s/mm
Back pressure	As low as possible
Ejection temperature	190 °C

# Zytel® ST801 NC010

NYLON RESIN


Stress-strain (dry)  
(measured on Zytel® ST801 BK010A)

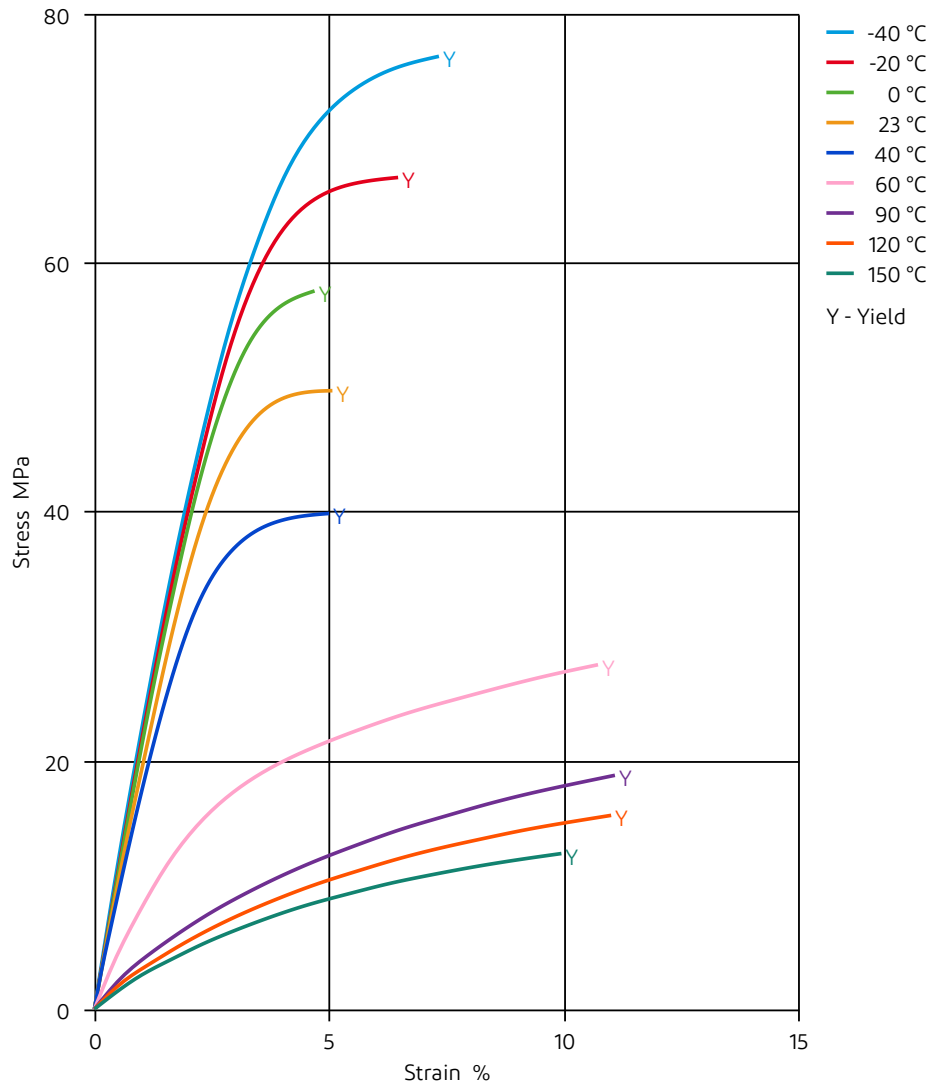

# Zytel® ST801 NC010

NYLON RESIN

Stress-strain (cond.)  
(measured on Zytel® ST801 BK010A)

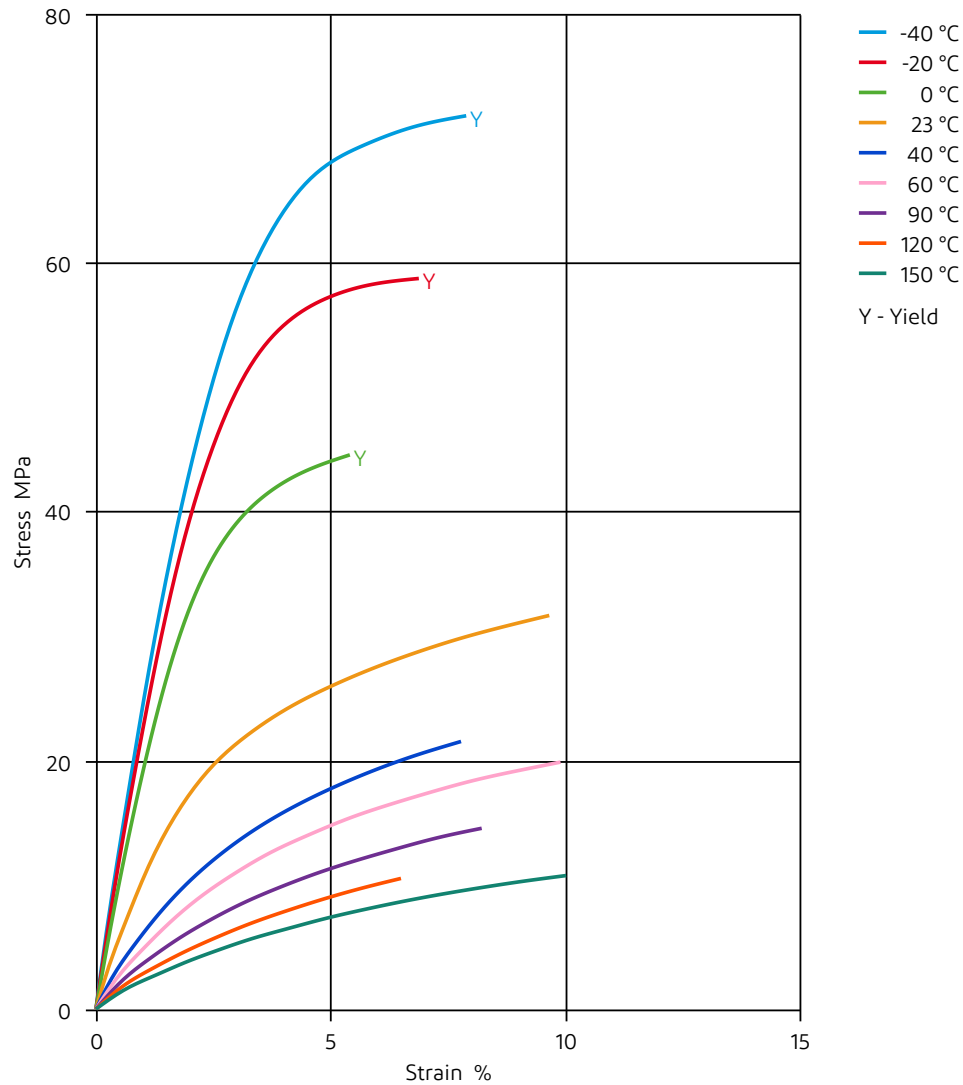




# Zytel® ST801 NC010

NYLON RESIN

Secant modulus-strain (dry)  
(measured on Zytel® ST801 BK010A)

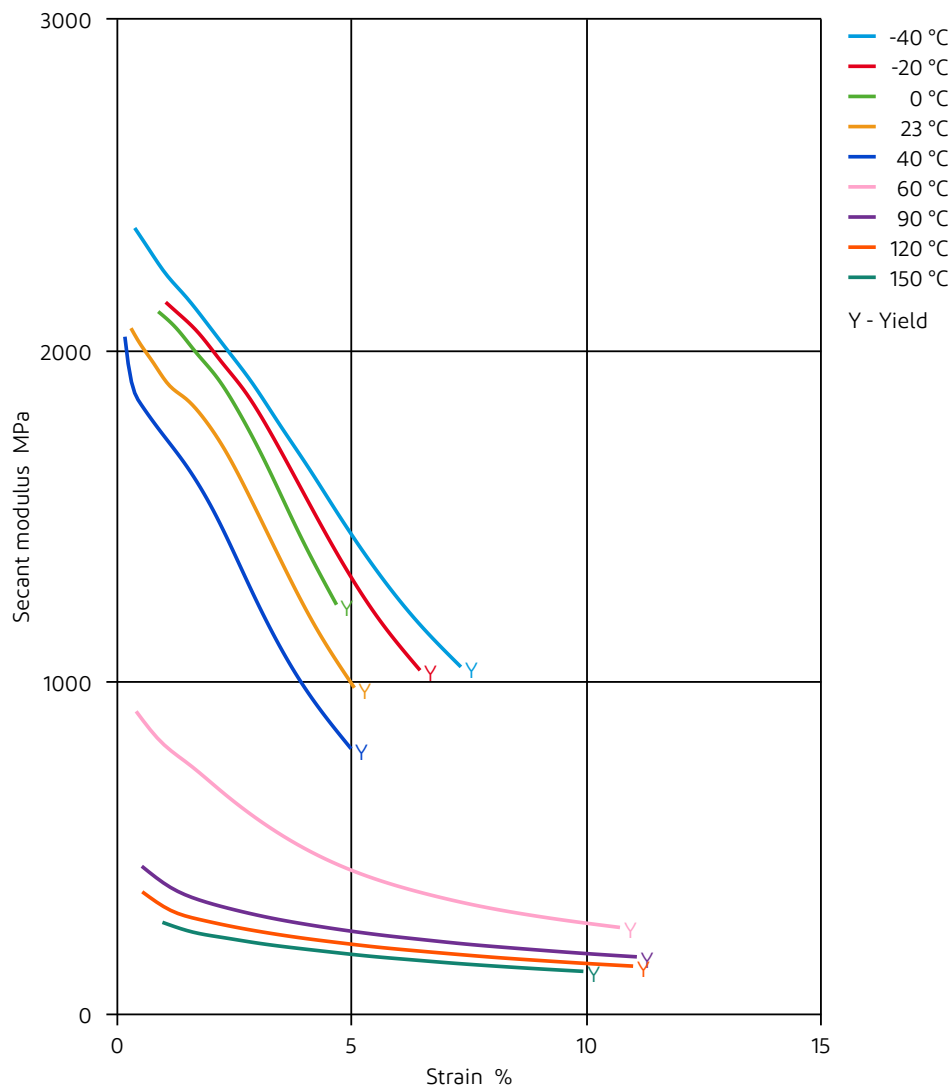




# Zytel® ST801 NC010

NYLON RESIN


Secant modulus-strain (cond.)  
(measured on Zytel® ST801 BK010A)

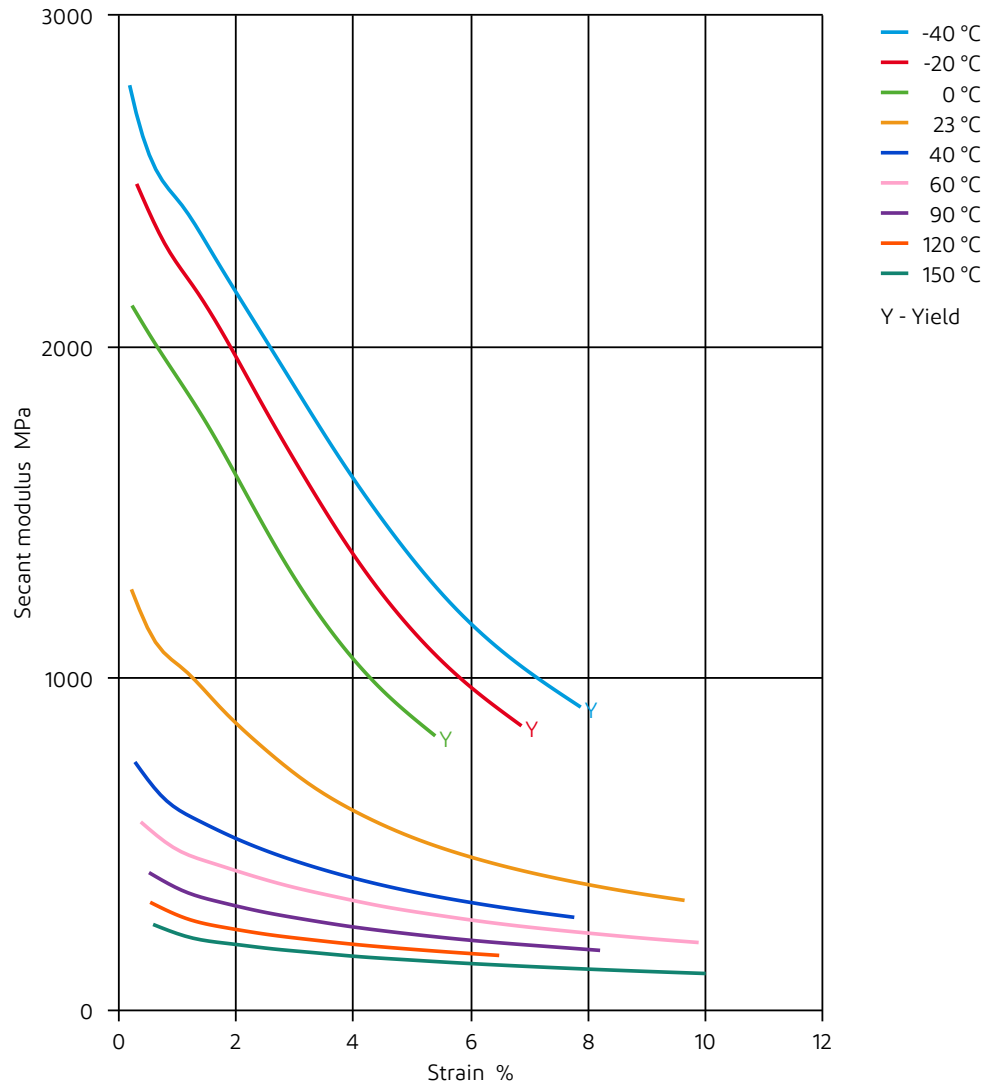

# Zytel® ST801 NC010

NYLON RESIN

Stress-strain (isochronous) 23°C (cond.)  
(measured on Zytel® ST801 NC010A)

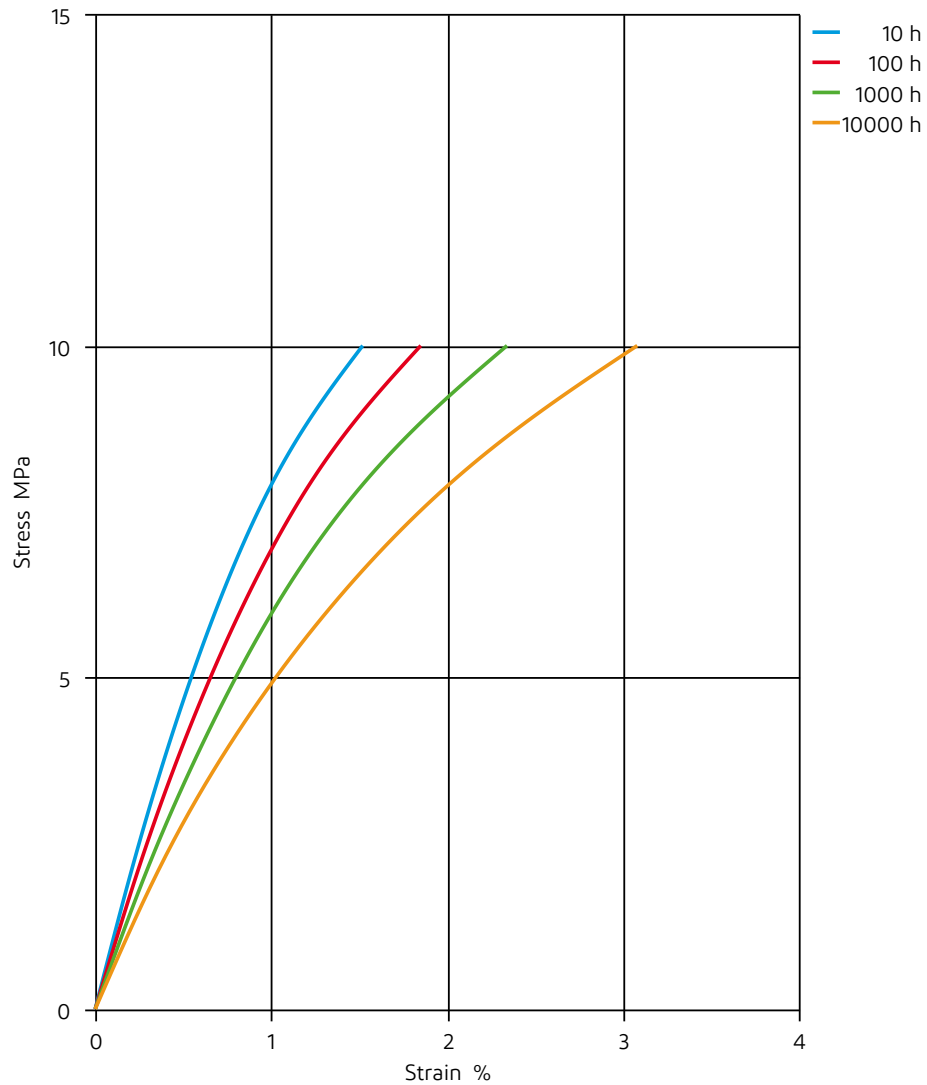




# Zytel® ST801 NC010

NYLON RESIN

Creep modulus-time 23°C (cond.)  
(measured on Zytel® ST801 NC010A)

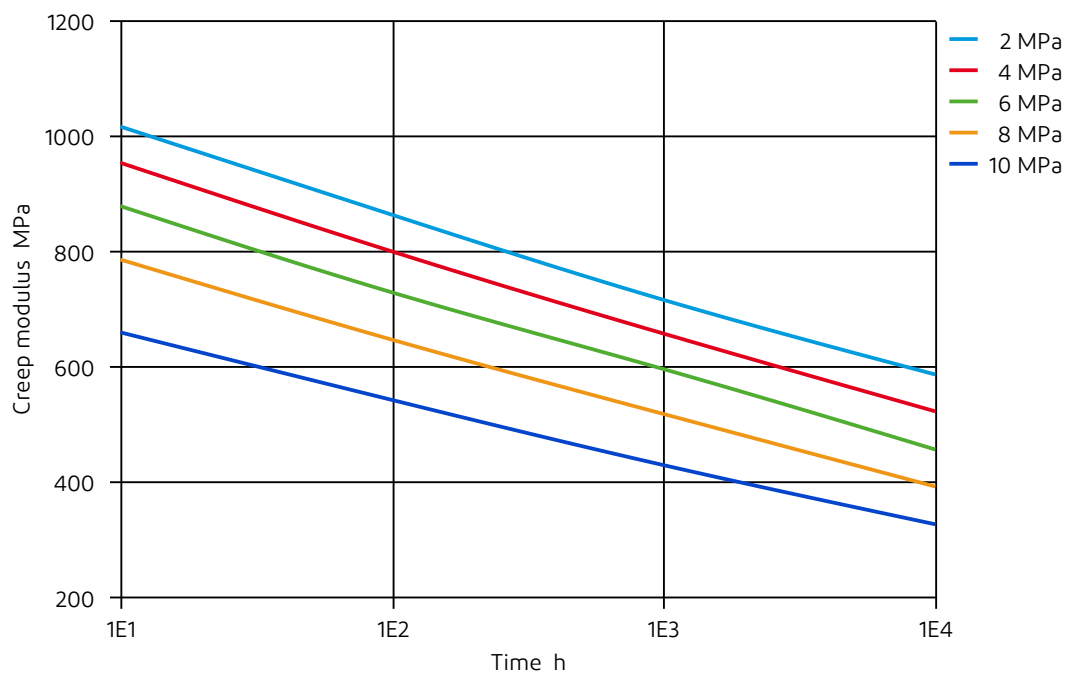



# Zytel® ST801 NC010

## NYLON RESIN

### Chemical Media Resistance

#### Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

#### Standard Fuels

- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C

#### Other

- ✓ Water, 23°C
- ✓ Water, 90°C

#### Symbols used:

- ✓ possibly resistant  
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation  
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.