

LIVING TOY ROBOT — HALLOWEEN MINIFRIDGE


CPX retained | 2 RGB eyes | 2 parallel RGB scene LEDs | all 10 onboard NeoPixels | WAV playback


REV C: two scene RGB LEDs share A3/A4/A5; each color element has its own 2.2k resistor.

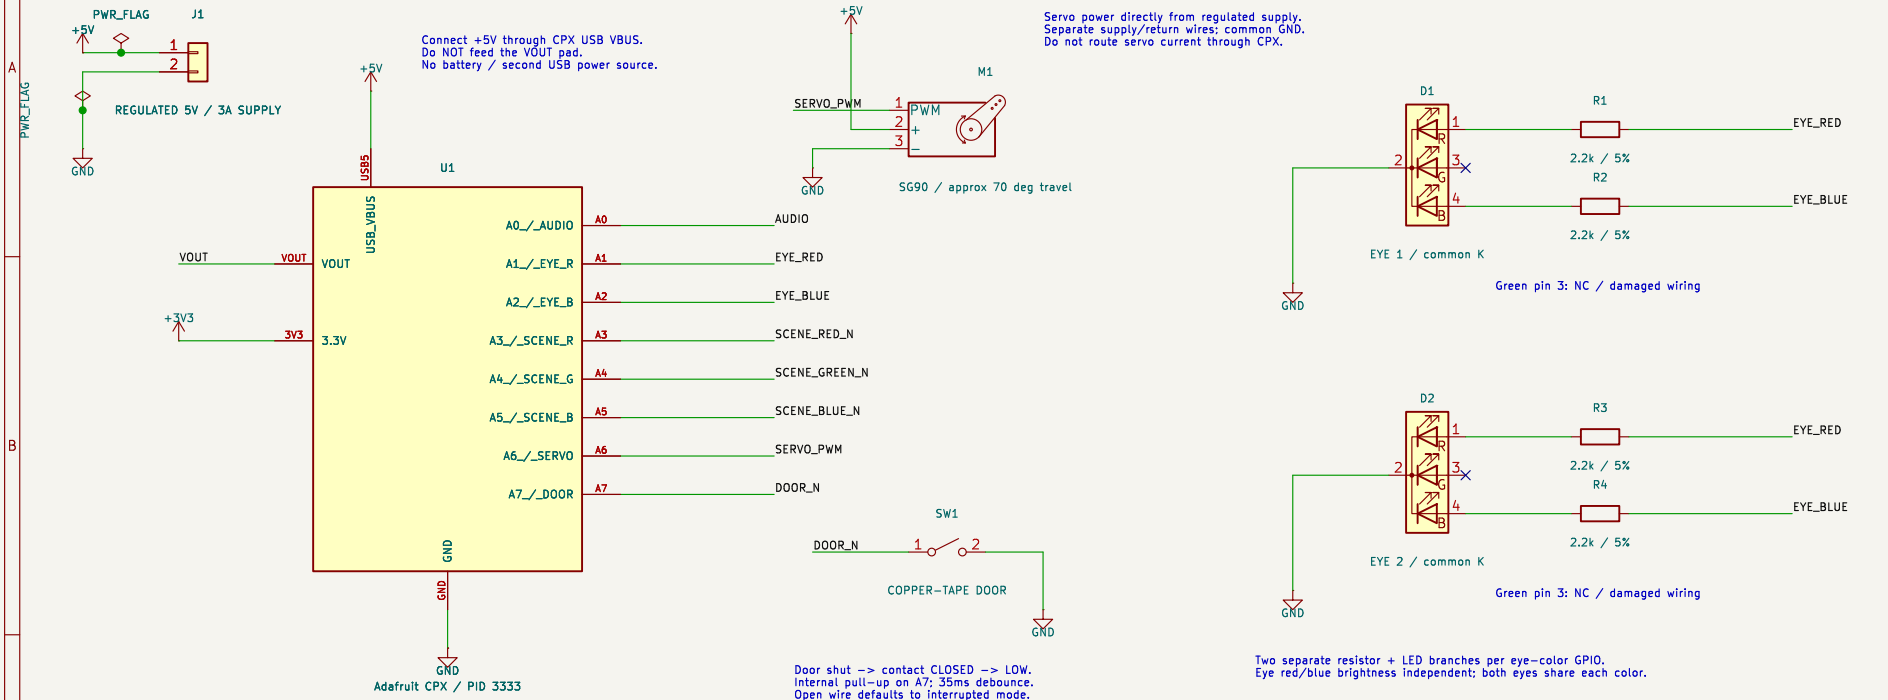

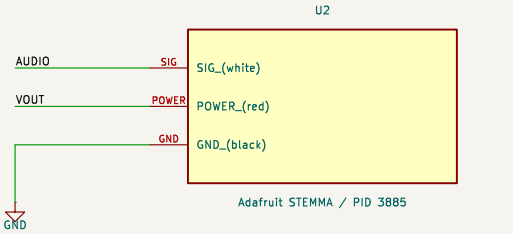

Existing integrated amplifier + 1W / 8ohm speaker.
Adjust onboard volume pot; verify total CPX USB branch <=350mA with loudest WAV and all effects.

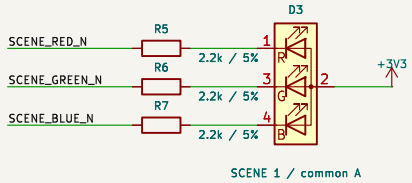

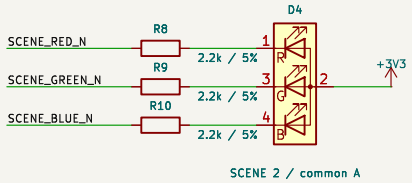

Two parallel scene LEDs; LOW = ON.
A3 = all red; A4 = all green; A5 = all blue.
Six separate 2.2k resistors.
Common anodes: 3.3V ONLY, never 5V.

BOM: 10 x 2.2k resistors, >=1/8W. LED physical lead order must be identified before wiring.

No added capacitors, transistors, MOSFETs, driver ICs, or expansion boards. Module internals are factory fitted.

Two parallel scene RGB LEDs; six 2.2k resistors; no extra GPIO.

Sheet: /
File: Living Toy Robot.kicad_sch

Title: Living Toy Robot — Halloween Minifridge

Size: A4	Date: 2026-10-21	Rev: C
KiCad E.D.A. 9.0.2		Id: 1/1