
Gossiper — User Manual

Gossiper gives you screen and CV feedback for controls that don't have any of their own — typically an external MIDI foot controller or knob box with no LEDs or display.




Assign one of its parameters to receive the MIDI (or CV, or device control), and Gossiper turns that into a plain CV signal *and* a pop-up notification on the device screen.

It is an "educated gossiper": it only gossips about a control if you're actually looking at it — a pop-up appears only on a device screen page that has one of Gossiper's four "Assign to notify" slots addressed to it. This is necessary because Mod devices only allow dialogs to be displayed if an `Assign to notify` parameter is linked to an endless knobs currently visible on the screen.

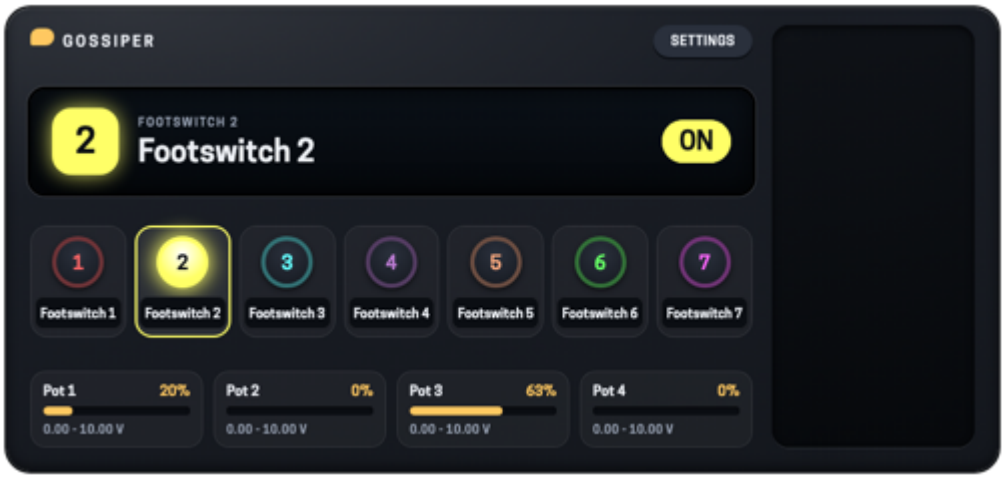

1. Plugin GUI overview

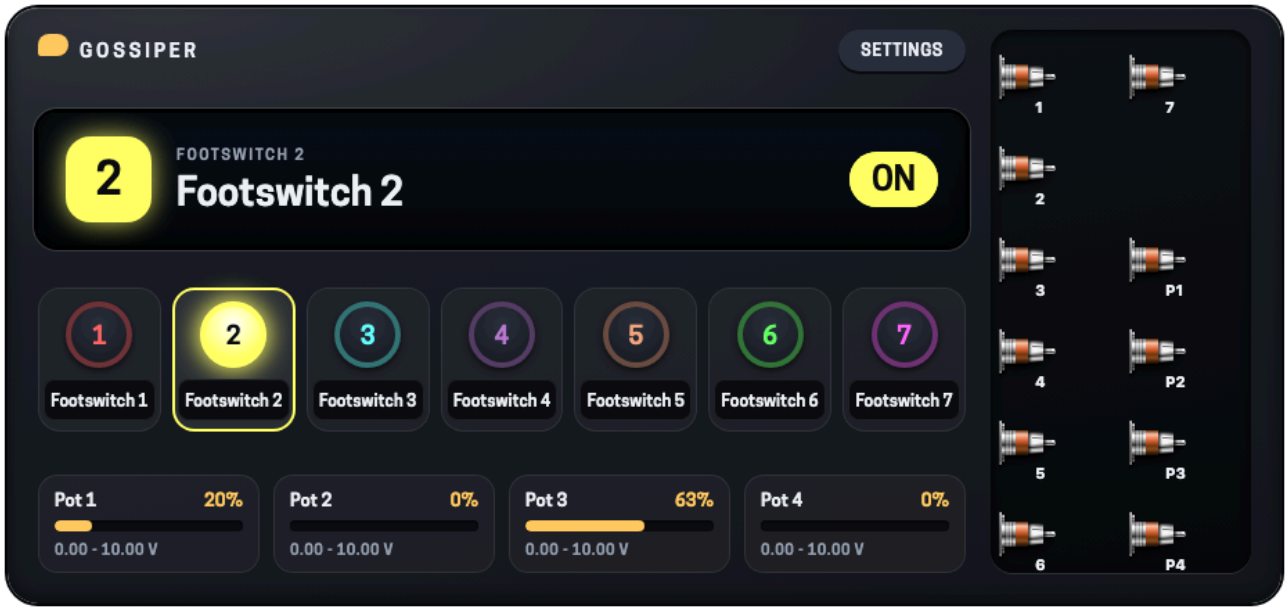

Item	Description	Interactivity
A — Display	Says **which control was used last** and what it did: `Footswitch 2 — ON`, or `Pot 3 — 63%`. It stays on, and lights up for a moment each time a control is used. This is how you see a message on a device that has no screen for plugin pop-ups, such as the MOD Duo.	Only visualization status
B — Footswitch indicator	A disc in a colour of its own for each footswitch. Lit while the footswitch is ON, and mirrored on `CV Output N` (0 V / 10 V). The one used last is outlined.	Only visualization status. Clicking on it does nothing.
C — Footswitch label	Click and type a name (up to 15 characters): this is the text the pop-up and the display show for that footswitch.	Editable field
D — Potentiometer	The position of the knob (0–100 %) as a meter, and the CV range (`Minimum` – `Maximum`, in volts) its 0–10 V output is scaled into. The one used last is outlined.	Only visualization status. To change the range, open the settings.
E — Settings	Opens the settings page (section 3). The gear icon above the plugin opens it too.	Button
F — CV outputs	`1` – `7` are the footswitches and `P1` – `P4` the potentiometers.	Jacks

2. What it's for


A MIDI foot controller (say, a cheap "Chocolate"-style box) can send Program Change or CC messages, but usually has no LED to confirm whether a patch is currently on or off, and no screen to show a knob's value. Gossiper closes that loop:

1. **Assign** a `Footswitch N` or `Potentiometer N` parameter to receive that MIDI message (or a CV signal, or a device knob/footswitch).
2. **Assign** one of the 4 `Assign to notify N` parameters to a page/knob or footswitch slot on the device screen.
3. **Use the CV output.** `CV Foot – Out N` (footswitches) or `CV Pot – Out N` (potentiometers) now carries a plain, calibrated CV signal you can route into any other plugin's CV-addressable parameter — the same way you would with a "Control to CV" utility plugin.

From then on, every time that MIDI controller sends a message, you see it confirmed on the device screen — without needing to look down at an unlit external box.

3. Setting it up on the device

Click **Settings** (or the gear icon above the plugin) to open the settings page. It has one panel for each thing you can link, and each panel starts with **Hardware assignment**: that is the step where you choose which control of your device, your MIDI foot controller or your pedal drives that parameter.

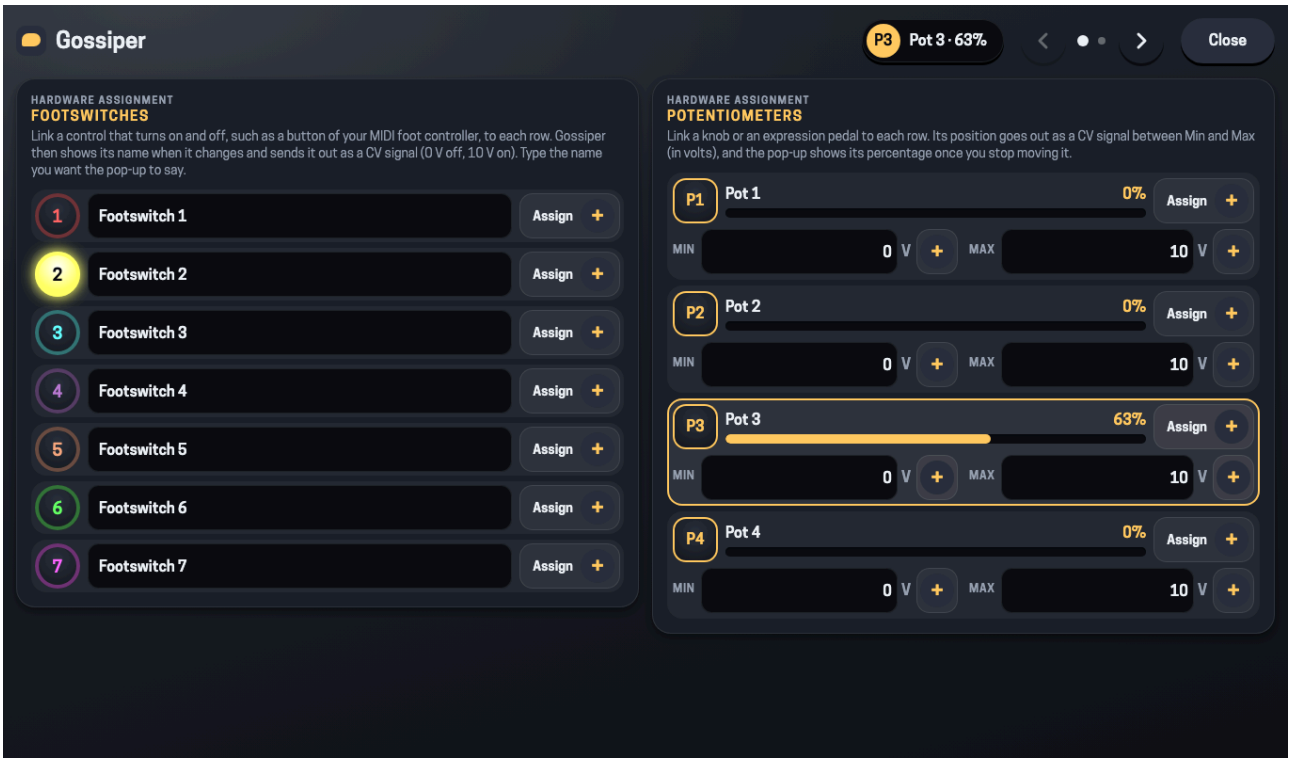

On a small screen the page splits into several pages instead of scrolling: use the arrows in the top bar (they are always there), the dots between them, or swipe sideways on a touch screen.

Step 1 — Assign the control. In **Footswitches**, find a row that is not used yet — or, in **Potentiometers**, a row for a knob — and tap **Assign** next to it.



In the opened modal, select MIDI option in **Assign to**.




Now you must send the MIDI message (or pick the device control) you want to drive it. After it, save. The button shows a check mark once it is assigned.

Step 2 — Assign a pop-up slot. Do the same for one of the four slots in **Screen pop-ups** — this is what decides *where* the pop-up will show.



Step 3 — Choose the target. Pick what the slot is addressed to — usually **Device**, so it lives on the screen itself.

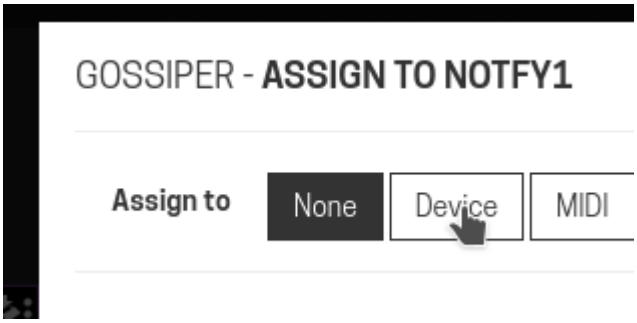

Step 4 — Pick the page and control. Choose which page (and which knob or footswitch, B/C) the slot sits on. Whenever that page is showing, that's where the pop-up appears.




Repeat step 1 for as many footswitches/potentiometers as you're feeding in, and steps 2–4 for as many slots as you want pages covered by — up to 4, so you can get a pop-up whichever of up to 4 pages you're currently on.

The page also lets you type the **name** of each footswitch and the **Min** and **Max** voltage of each potentiometer, and keeps your own presets (**Saved presets**).

> **No screen for pop-ups?** The MOD Duo (and any device without the HMI) cannot show pop-ups: the display on the plugin itself (item A, section 1) is the feedback

there. Open the pedalboard and look at it.

4. How the pop-up decides when to appear

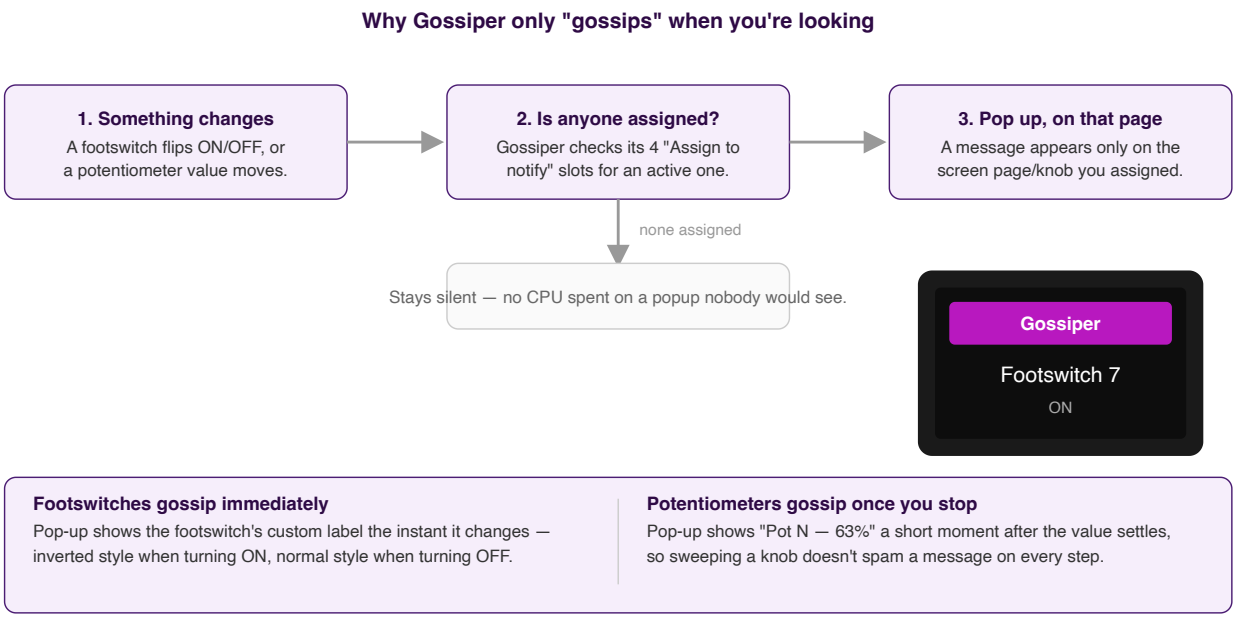

- **Footswitches gossip immediately** — the pop-up shows the footswitch's custom label the instant it flips, styled *inverted* when turning ON and *normal* when turning OFF.
- **Potentiometers gossip once you stop** — the pop-up shows `Pot N — xx%` a short moment after the value settles, so sweeping a knob doesn't spam a message on every intermediate step.
- **No assignment, no pop-up.** If none of the 4 notify slots is currently addressed to a visible page, Gossiper stays silent.

> **Requires MOD Dwarf firmware v1.13 or newer** for the pop-up mechanism. On older firmware the CV outputs still work; you just won't get the on-screen message.
>
> **Note from the author:** the pop-up is meant for occasional confirmation, not as a live debugging readout — don't expect to use it for something that changes every few milliseconds.

5. Renaming a footswitch

Click a footswitch's label field and type a new name (up to 15 characters). Allowed characters are letters, digits, spaces and `+ - : _ .`; anything else is replaced with `_`. The name is what the pop-up shows for that footswitch, and it's saved with the pedalboard/preset.

6. Why bother: one real example

Gossiper can also be used to replaces stacks of "Control to CV" utility plugins — one Gossiper with several footswitches/potentiometers assigned does the job of many single-purpose CV converters, at a fraction of the CPU cost.

For instance, Rom user once informed us that after its work replacing plugins to gossiper, the Dwarf's CPU usage was reduced from 81% down to 72%.

7. Port reference

Port	Type	Description
`CV Foot - Out 1` – `7`	CV output	0 V/10 V, mirrors `Footswitch N`.
`Footswitch 1` – `7`	Control input (toggle)	Assign this to receive MIDI/CV/device input.
`Assign to notify 1` – `4`	Control input	No audio/CV effect; assign to a device page/control so pop-ups show there.
`Pot 1` – `4`	Control input (0–1)	Assign this to receive MIDI/CV/device input.
`Minimum N` / `Maximum N`	Control input (volts)	The CV range `Potentiometer N`'s 0–1 value is scaled into.
`CV Pot - Out 1` – `4`	CV output	`Potentiometer N` scaled into `[Minimum N, Maximum N]` volts.
Footswitch label 1–7	Plugin property (patch)	The custom name for each footswitch, edited from the GUI text field.

8. Credits

Gossiper is developed by Paulo Mateus (SrMouraSilva). Discuss the plugin, watch the demo video or follow its progress on the MOD Audio forum thread or the plugins-lv2 repository.