East West University

Project Report

Course Code: EEE 305

Course Name: Electromagnetic Fields and Wave

Submitted to:

Dr Farhana parveen

Assistant Professor

Dept. of Electrical and Electronic Engineering

East West University

Submitted by:

Name	*ID*
Md. Srabon Islam Ramim	*2020-2-80-046*

Date of Submission: 23-12-2022

Theory

The capacitance of a cylindrical capacitor depends on four design parameters:

1. Radius of the inner cylinder (a)
2. Radius of the outer cylinder (b)
3. Length of the capacitor (H)
4. Permittivity of the material between the two cylinders (ε_r)

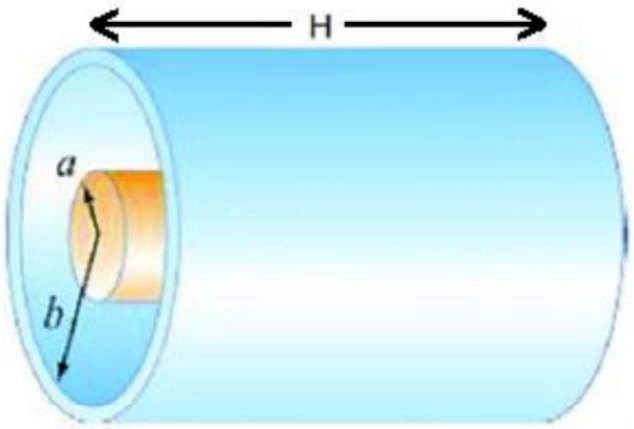

$$C = \frac{2\pi\varepsilon_0\varepsilon_r H}{\ln\left(\frac{b}{a}\right)}$$

Circuit Diagrams

Vary a

SL No.	A (mm)	B (mm)	H (mm)	Material, ε_r	Screenshot
01.	0.5	1.5	30	Air/Vacuum (1)	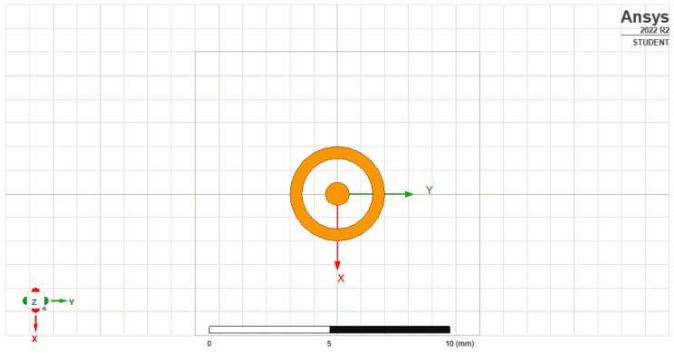
02.	0.8	1.5	30	Air/Vacuum (1)	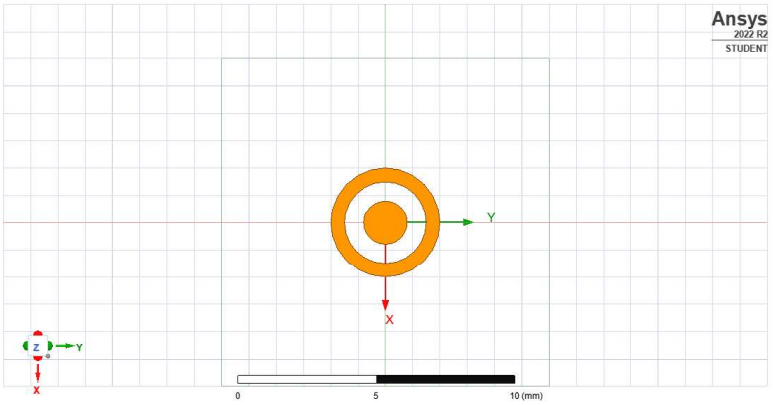
03.	1.1	1.5	30	Air/Vacuum (1)	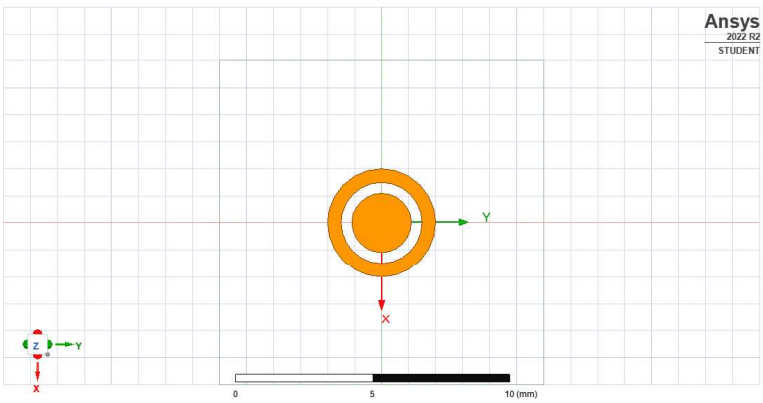

Vary b

SL No.	a (mm)	b (mm)	H (mm)	Material, ε_r	Screenshot
01.	0.5	1.5	30	Air/Vacuum (1)	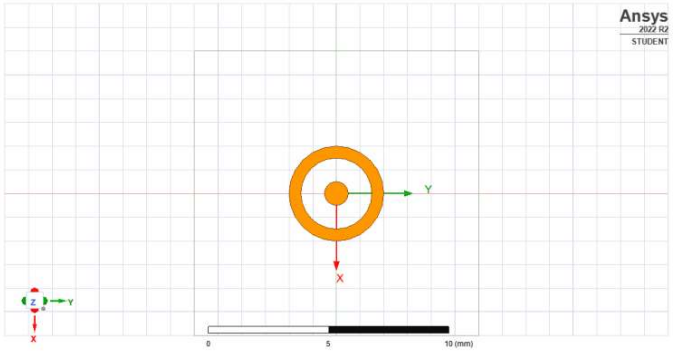
02.	0.5	2	30	Air/Vacuum (1)	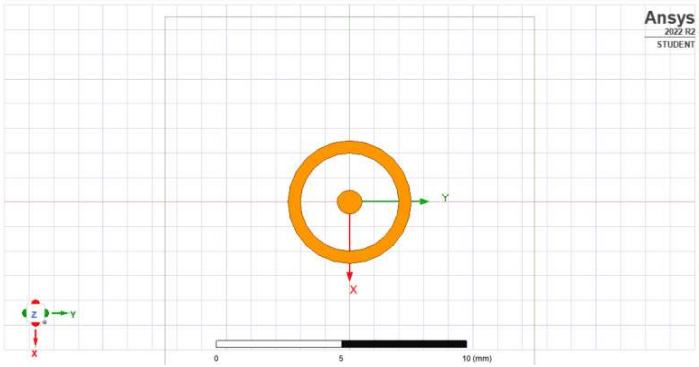
03.	0.5	1	30	Air/Vacuum (1)	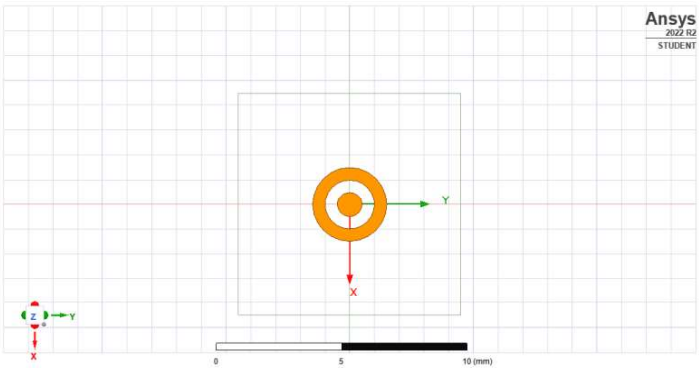

Vary H,

SL No.	a (mm)	b (mm)	H (mm)	Material, ε_r	Screenshot
01.	0.5	1.5	30	Air/Vacuum (1)	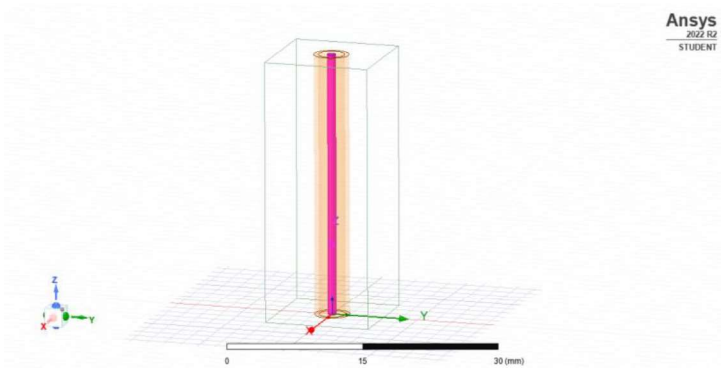
02.	0.5	1.5	10	Air/Vacuum (1)	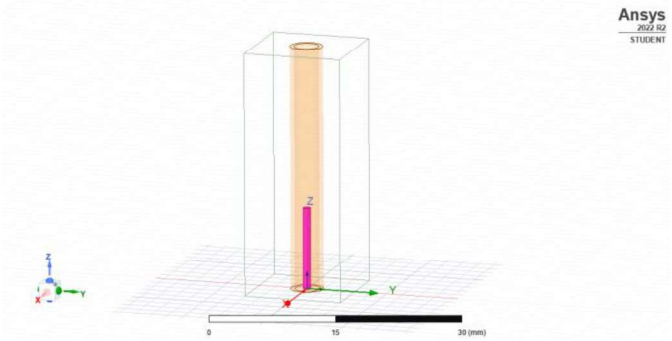
03	0.5	1.5	50	Air/Vacuum (1)	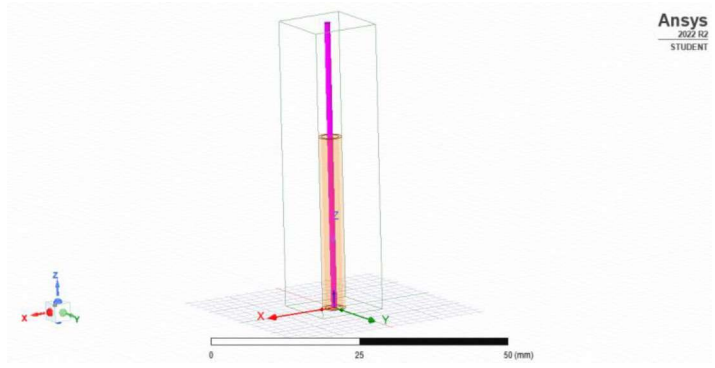

Vary ε_r

SL No.	a(mm)	b(mm)	H(mm)	Material, ε_r	Screenshot
01.	0.5	1.5	30	Air/Vacuum(1)	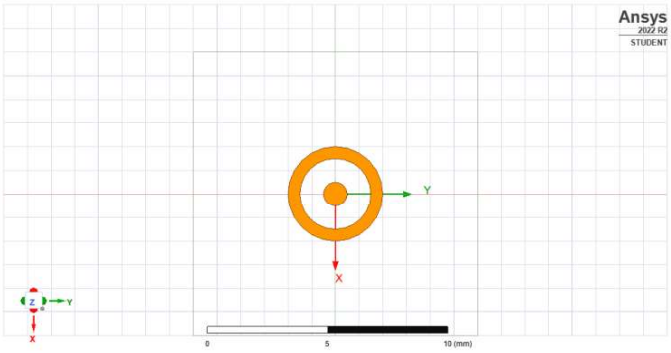
02.	0.5	1.5	30	Teflon (2.1)	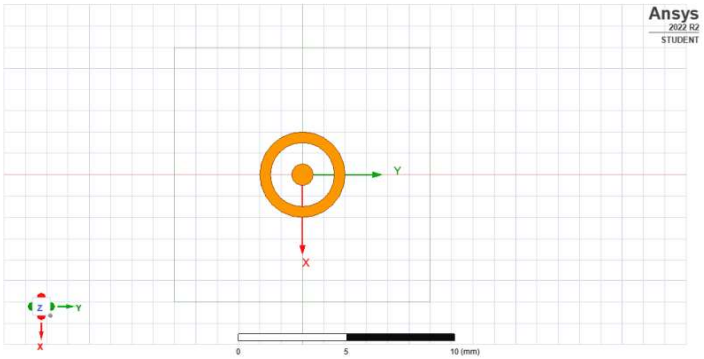
03	0.5	1.5	30	FR4 epoxy (4.4)	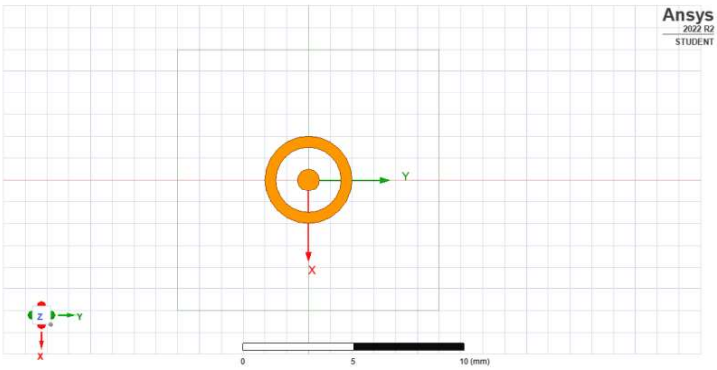

Vary a

SL No.	a(mm)	b(mm)	H(mm)	Material, ε_r	Capacitance (pF) from simulation	Capacitance (pF) from equation
01.	0.5	1.5	30	Air/Vacuum(1)	1.5328	1.5192
02.	0.8	1.5	30	Air/Vacuum(1)	2.6654	2.655
03	1.1	1.5	30	Air/Vacuum(1)	5.4001	5.3811

Vary b

SL No.	a(mm)	b(mm)	H(mm)	Material, ε_r	Capacitance (pF) from simulation	Capacitance (pF) from equation
01.	0.5	1.5	30	Air/Vacuum(1)	1.5328	1.5192
02.	0.5	2	30	Air/Vacuum(1)	1.2175	1.2039
03	0.5	1	30	Air/Vacuum(1)	2.4179	2.4078

Vary H

SL No.	a(mm)	b(mm)	H(mm)	Material, ε_r	Capacitance (pF) from simulation	Capacitance (pF) from equation
01.	0.5	1.5	30	Air/Vacuum(1)	1.5328	1.5192
02.	0.5	1.5	10	Air/Vacuum(1)	0.53472	0.5064
03	0.5	1.5	50	Air/Vacuum(1)	2.5125	2.5319

Vary ε_r

SL No.	a(mm)	b(mm)	H(mm)	Material, ε_r	Capacitance (pF) from simulation	Capacitance (pF) from equation
01.	0.5	1.5	30	Air/Vacuum(1)	1.5328	1.5192
02.	0.5	1.5	30	Teflon (2.1)	3.2113	3.1902
03	0.5	1.5	30	FR4 epoxy (4.4)	6.7082	6.6843