

# How do I change the administrative username or password of TP-Link device?

User Application Requirement

Updated 11-26-2024 09:33:21 AM

 6714529

**Note:**

- 1. **It will be assumed you have already logged into your TP-Link device's web management UI.**
- 2. **Web management UI is varied by model.**
- 3. **No web management UI is required for SOHO Switches and Adapters.**

Please choose the category of your device in the table below.

Link [here](#) to find the correct product category of your model.

|   |  |                                   |
|---|--|-----------------------------------|
| <a href="#">Wi-Fi Routers</a>             | <a href="#">Modems/Gateways</a>        | <a href="#">Network Expansion</a> |
| <a href="#">Smart Home</a>                | <a href="#">Mobile Wi-Fi</a>           | <a href="#">Accessories</a>       |
| <a href="#">JetStream Switches</a>        | <a href="#">Auranet Business Wi-Fi</a> | <a href="#">SafeStream Router</a> |
| <a href="#">Pharos Wireless Broadband</a> |  |                                   |

## For Wi-Fi Routers

Example A:

Go to **Advanced > System Tools > Administration** and complete the settings in **Account Management** section. Enter the old username and old password. Enter the new username and enter the new password twice (both case-sensitive). Click **Save**. Use the new username and password for the following logins.

Chat Now

The screenshot shows the TP-Link web interface. The top navigation bar includes 'Quick Setup', 'Basic', and 'Advanced' (highlighted with a red box). The left sidebar contains 'Parental Controls', 'QoS', 'Security', 'IPv6', 'VPN Server', 'System Tools' (highlighted with a yellow box), and 'Administration' (highlighted with a red box). The main content area is titled 'Account Management' and contains fields for 'Old Username', 'Old Password', 'New Username' (with a hint '(a-z, A-Z, 0-9, \_)'), 'New Password' (with a strength indicator showing 'Low', 'Middle', and 'High'), and 'Confirm New Password'. A 'Save' button is located to the right of these fields. Below this is the 'Password Recovery' section, which includes a checkbox for 'Enable Password Recovery' and another 'Save' button.

Example B:

Click on **System Tools** > **Password** on the left panel. You will be then prompted to change your login information. Press **Save**. The system will send you back to the login screen. Use the new username and password for the following logins.

[Chat Now](#)

The screenshot shows the TP-Link web interface. On the left is a navigation menu with options like Status, Quick Setup, Network, Dual Band Selection, Wireless 2.4GHz, Wireless 5GHz, Guest Network, DHCP, USB Settings, NAT, Forwarding, Security, Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, IPv6 Support, System Tools (highlighted), Time Settings, Diagnostic, Firmware Upgrade, Factory Defaults, Backup & Restore, Reboot, Password (highlighted), System Log, Statistics, and Logout. The main content area is titled 'Password' and contains a red warning message: 'Username and password can contain between 1 - 15 characters and may not include spaces.' Below this are input fields for 'Old User Name' (admin), 'Old Password' (masked with dots), 'New User Name' (test), 'New Password' (masked with dots), and 'Confirm New Password' (masked with dots). At the bottom are 'Save' and 'Clear All' buttons.

## For Modems/Gateways

Example A:

Go to **Maintenance > Administration**, create your own login password, click **Save**. Use the new password for the following logins.

The screenshot shows the TP-Link web interface for a '150Mbps Wireless N ADSL2+ Modem Router'. The top navigation bar includes 'Maintenance' (highlighted), 'Quick Start', 'Interface Setup', 'Advanced Setup', 'Access Management', 'Maintenance' (highlighted), 'Status', and 'Help'. Below this, the 'Administration' sub-menu is highlighted, with other options like 'Time Zone', 'Firmware', 'SysRestart', and 'Diagnostics'. The main content area is titled 'Administrator' and contains input fields for 'Username' (admin), 'New Password' (masked with dots), and 'Confirm Password' (masked with dots). At the bottom are 'SAVE' and 'CANCEL' buttons.

[Chat Now](#)

## Example B:

Go to **System Tools > Manage Control**, enter the old password, then create a new user name and password and confirm it. Click **Save**. Use the new username and password for the following logins.

**TP-LINK** 300Mbps Wireless N USB A

**Manage Control**

**Current User Status**

User Type: [object HTMLSpanElement]  
 Username: [object HTMLSpanElement]  
 Host IP Address: [object HTMLSpanElement]  
 Host MAC Address: [object HTMLSpanElement]

**Account Management**

The username and password must not exceed 15 characters in length!

Old Password: [text input]  
 New User Name: [text input]  
 New Password: [text input]  
 Confirm password: [text input]

**Service Configuration**

|                   | HTTP Service                          | Available Host (IP/MAC) |
|-------------------|---------------------------------------|-------------------------|
| Local Management  | Port: [text input]                    | [text input]            |
| Remote Management | Enable: [checkbox] Port: [text input] | [text input]            |

ICMP(ping): [checkbox] Remote [checkbox] Local [checkbox]

**Save**

## Example C:

Click on **Management > Access Control > Passwords**. Choose your user account, enter the old password, then fill in a new password and confirm it. Click **Save/Apply**.

**TP-LINK** 300Mbps Wireless N USB A

**Access Control -- Passwords**

Access to your DSL Modem Router is controlled through three user accounts: admin, support, and user.

The user name "admin" has unrestricted access to change and view configuration of your DSL Modem Router.

The user name "support" is used to allow an ISP technician to access your DSL Modem Router for maintenance and to run diagnostics.

The user name "user" can access the DSL Modem Router, view configuration settings and statistics, as well as, update the router's software.

Use the fields below to enter up to 16 characters and click "Save/Apply" to change or create passwords. Note: Password cannot contain a space.

Username: support ▼  
 Old Password: [password input]  
 New Password: [password input]  
 Confirm Password: [password input]

**Save/Apply**

## Example D:

Go to **Advanced > System Tools > Administration**, enter the old password, enter the new password and enter again to confirm. Click **Save** to make the settings effective. Use the new password for the following logins.

**Chat Now**

The screenshot shows the TP-Link Archer D7 web interface. The top navigation bar includes 'Quick Setup', 'Basic', and 'Advanced' tabs. The 'Advanced' tab is selected. On the left sidebar, 'System Tools' is highlighted. The main content area is divided into three sections: 'Account Management', 'Local Management', and 'Remote Management'. Each section has input fields for configuration and a 'Save' button.

**Account Management**

Old Password:

New Password:  Low Middle High

Confirm New Password:

**Save**

**Local Management**

Port:

IP/MAC Address:

**Save**

**Remote Management**

Remote Management: ☐ Enable

Port:

IP/MAC Address:

**Save**

**ICMP Ping**

Example E:

Go to **Status > Security**. Enter the current password. Set a new password. Enter again to confirm. Click **Apply**.

The screenshot shows the TP-Link Archer D7 web interface with the 'Status' tab selected. The left sidebar shows 'Status', 'Connection', 'Software', 'Security', 'Event Log', and 'Logout'. The 'Security' page is displayed, featuring a description and three input fields for password configuration, followed by an 'Apply' button.

**TP-LINK**

**Status**

**Security**

This page allows configuration of administration access privileges.

Current Password:

New Password:


Re-Enter New Password:

**Apply**

Example F:

Click on **System Tools > Password**. Enter the old user name and password. Set a new user name and password. Enter the new password again to confirm. Click **Save**.

**Chat Now**

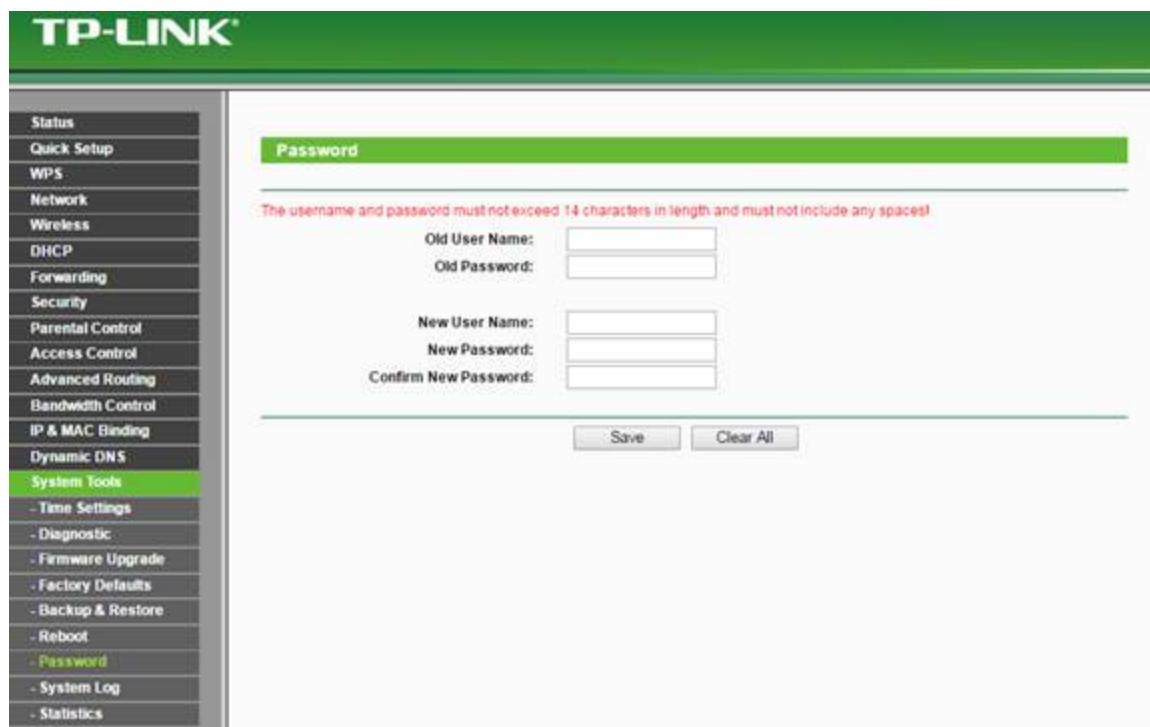

The screenshot shows the TP-Link web interface. On the left is a navigation menu with options: Status, Quick Setup, WPS, Network, Wireless, DHCP, Forwarding, Security, Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, System Tools (highlighted), Time Settings, Diagnostic, Firmware Upgrade, Factory Defaults, Backup & Restore, Reboot, Password (highlighted), System Log, and Statistics. The main content area is titled "Password" and contains a red warning message: "The username and password must not exceed 14 characters in length and must not include any space!". Below this are input fields for "Old User Name:", "Old Password:", "New User Name:", "New Password:", and "Confirm New Password:". At the bottom of the form are "Save" and "Clear All" buttons.

Example G:

Go to **Management > User Management**. Select your username as admin or user. Enter the old password. Set a new password. Enter the new password again to confirm it. Click **Save**.



The screenshot shows the "User Management" page. It has a green header bar with the title "User Management". Below the header, there is a "Username" dropdown menu currently set to "admin". Underneath are three input fields labeled "Old Password:", "New Password:", and "Confirm Password:". At the bottom of the form is a "Save" button.

## For Network Expansion

Example A:

Click on **Settings > System Tools > Admin Account**. Enter the old password. Enter the new password. Click **Save**.

**Chat Now**

The screenshot shows the TP-Link web interface. On the left is a sidebar with navigation options: Status, Wireless, Network, Advanced Settings, and System Tools (highlighted in yellow). Under System Tools, there are links for Time Settings, LED Control, Firmware Upgrade, Backup & Restore, Admin Account, and System Log. The main content area is titled 'Admin Account' and contains three password input fields: 'Old Password:', 'New Password:', and 'Confirm Password:'. The 'New Password' field has a strength indicator showing 'Low', 'Medium', and 'High'. A 'Save' button is located at the bottom right of the form.

Example B:

Go to **System Tools > Password**. Enter the old user name and password. Enter the new user name and password. Enter the new password again to confirm it. Click **Save**.

The screenshot shows the TP-Link web interface for a '300M Wireless N Access Point' (Model No. TL-WA901ND). The left sidebar is expanded, showing 'System Tools' with a list of options: SNMP, Diagnostic, Ping Watch Dog, Firmware Upgrade, Factory Defaults, Backup & Restore, Reboot, Password (highlighted), System Log, and Logout. The main content area is titled 'Password' and includes a note: 'Username and password can contain between 1 - 15 characters and may not include spaces.' Below this note are four input fields: 'Old User Name:', 'Old Password:', 'New User Name:', and 'New Password:', followed by a 'Confirm New Password:' field. At the bottom are 'Save' and 'Clear All' buttons.

Example C:

Go to **Advanced > System Tools > Account Management**. Enter the current username and password. Enter the new username and password. Click **Save**.

**Chat Now**



The screenshot shows the TP-Link AP500 web interface. The top navigation bar includes 'Quick Setup' and 'Advanced' tabs. The left sidebar lists various system tools: Status, Wireless, Network, System Tools (highlighted), System Log, Diagnostics, Firmware Upgrade, Backup & Restore, Account Management (highlighted), SNMP, and Ping Watchdog. The main content area is titled 'Account Management' and contains the following fields:

- Current Username:
- Current Password:
- New Username:
- New Password:  (with a strength indicator: Low, Middle, High)
- Confirm Password:

A green 'Save' button is located at the bottom right of the form.

## For Smart Home (Cloud Cameras)

Click the **System > Account**. On this page, you can change the administrator's password and manage the user account(s) that are allowed to access to your camera.

Click **Change Password** to change the password of the admin account which has all authority of configuration, or user accounts that can only view the Live View. Enter the old password and the new password. Click **Save**.

To add a new user account, click **Add**, enter the new user name and password. Click **Save**.

The screenshot shows the TP-Link web interface with the 'System' tab selected in the left sidebar. The 'Account' section is active, displaying a table of user accounts:

| User Name | User Group |
|-----------|------------|
| admin     | admin      |

Below the table are three buttons: 'Add', 'Change Password' (highlighted), and 'Delete'. The 'Change Password' section includes the following fields:

- Current User:
- Old Password:
- New Password:
- Confirm Password:

A 'Save' button is located at the bottom right of the form.

Mobile Wi-Fi

Chat Now



Example A:

Go to **Advanced > System Tools > Modify Password**. Enter the old user name and password. Enter the new user name and password. Enter the new password to confirm. Click **Save**.

The screenshot shows the TP-Link web interface. The top navigation bar includes 'Status', 'Wizard', 'SMS', and 'Advanced'. The left sidebar lists various settings: 'Dial-up', 'SIM Lock', 'Wireless', 'DHCP Server', 'System Tools', 'Configuration', 'Restore Factory', 'Modify Password' (highlighted), 'Reboot', 'About Device', and 'Logout'. The main content area is titled 'Modify Login Password'. It contains a red warning message: 'Username and password can contain between 1 – 15 characters and may not include spaces.' Below this, there are four input fields: 'Old User Name' (containing 'admin'), 'Old Password' (masked with dots), 'New User Name' (containing 'test'), and 'New Password' (masked with dots). A 'Confirm New Password' field is also present, also masked with dots. At the bottom right of the form are 'Save' and 'Clear' buttons.

Example B:

Go to **Advanced > Device > Account Management**. Enter the old user name and password. Enter the new user name and password. Enter the new password to confirm. Click **Save**.

The screenshot shows the TP-Link web interface. The top navigation bar includes 'Wizard', 'Status', 'SMS', 'Advanced', and 'Logout'. The left sidebar lists various settings: 'Dial-up', 'Wireless', 'DHCP Server', 'Data Usage Settings', 'Storage Sharing', 'Power Saving', 'Device' (highlighted), 'Firmware Update', 'Factory Defaults', 'Account Management' (highlighted), and 'Shutdown'. The main content area is titled 'Account Management'. It contains a green warning message: 'Username should contain 1 to 15 characters using letters, digits, and underlines. Password should contain 1 to 15 characters excluding spaces.' Below this, there are four input fields: 'Old Username', 'Old Password', 'New Username', and 'New Password'. A 'Confirm Password' field is also present. To the right of the 'New Password' field, there is a note: 'High-intensity password contains letters, digits and symbols.' At the bottom right of the form is a 'Save' button.

**Chat Now**

## For Accessories (Print Servers)

Click **Setup > System**. Enter the administrator's password. Click **Save & Restart**.

The screenshot shows the TP-Link TL-PS110P Network Print Server web interface. The top navigation bar includes 'Status', 'Setup', 'Misc', and 'Restart' buttons. The 'System' tab is selected, showing a configuration page for general system settings. The 'Administrator's Password' section is highlighted with a red box, containing fields for 'Account' (pre-filled with 'admin'), 'Password', and 'Re-type Password'. The 'Save & Restart' button is located at the bottom of the page.

## For JetStream Switches

Example A:

Go to **System > User Management > User Config**.

*To create a user:*

User Name: Create a name for users' login.


Access Level: Select the access level to login. Admin: Admin can edit, modify and view all the settings of different functions. Guest: Guest only can view the settings without the right to edit and modify.

User Status: Select Enable/Disable the user configuration.

Password: Type a password for users' login.

Confirm Password: Retype the password.

**Chat Now**

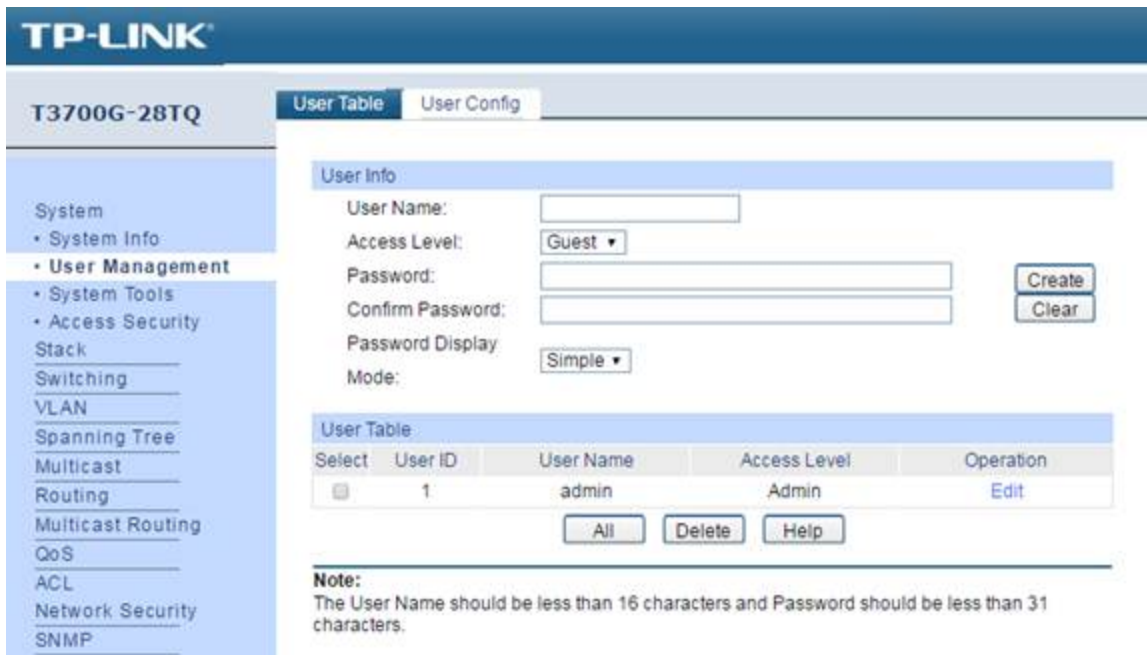

**TP-LINK**

**T3700G-28TQ**

User Table User Config

**User Info**

User Name:

Access Level:

Password:

Confirm Password:

Password Display:

Mode:

Create Clear

**User Table**


| Select                   | User ID | User Name | Access Level | Operation |
|--------------------------|---------|-----------|--------------|-----------|
| <input type="checkbox"/> | 1       | admin     | Admin        | Edit      |

All Delete Help

**Note:**  
The User Name should be less than 16 characters and Password should be less than 31 characters.

To edit a user:

Click **Edit** button of the user. Tick **Password Modify**. Enter the old password. Set a new password. Click **Apply**.

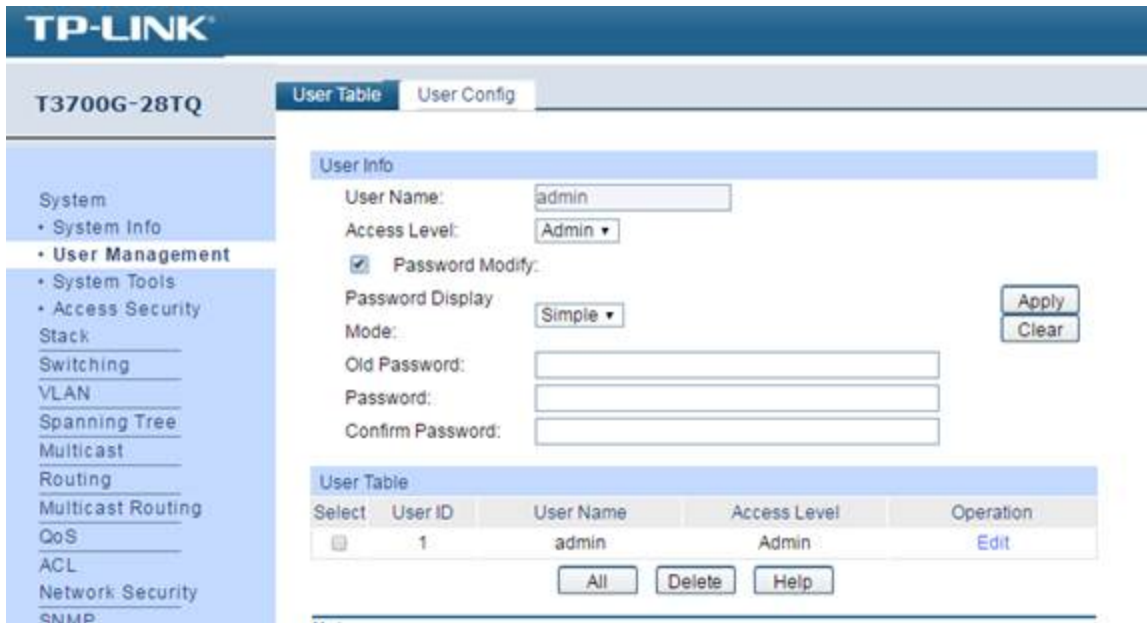

**TP-LINK**

**T3700G-28TQ**

User Table User Config

**User Info**

User Name:

Access Level:

☒ Password Modify:

Password Display:

Mode:

Old Password:

Password:

Confirm Password:

Apply Clear

**User Table**

| Select                   | User ID | User Name | Access Level | Operation |
|--------------------------|---------|-----------|--------------|-----------|
| <input type="checkbox"/> | 1       | admin     | Admin        | Edit      |

All Delete Help

Example B:

Choose the menu **System > User Account** to load the following page. Enter the old password. Enter the new password. Enter the new password again to confirm. Click **Apply**.

**Chat Now**

### User Account Setting

|                  |                                    |
|------------------|------------------------------------|
| New Username     | <input type="text" value="admin"/> |
| Old Password     | <input type="password"/>           |
| New Password     | <input type="password"/>           |
| Confirm Password | <input type="password"/>           |

---

**Note:**  
The length of user name and password should not be more than 16 characters using digits, English letters and underlines only.

## For Auranet Business Wi-Fi

Example A:


Go to **System > User Account**. Enter the present user name and password of the admin account to get the permission of modification. Enter a new user name and password. Enter the new password again to confirm. Click **Save**.

The screenshot shows the TP-Link EAP110 web interface. The top navigation bar includes 'Network', 'Wireless', 'Monitoring', 'Management', and 'System' (highlighted in green). Below the navigation bar, the 'User Account' tab is selected. The 'Account Management' section contains the following fields: 'Old User Name', 'Old Password', 'New User Name', 'New Password', and 'Confirm New Password'. A 'Save' button is located at the bottom right of the form.

Example B:

Go to **System** page. Enter the current user name and password. Enter a new user name and password for the admin account. Confirm the new password. Click **OK**.


**Chat Now**

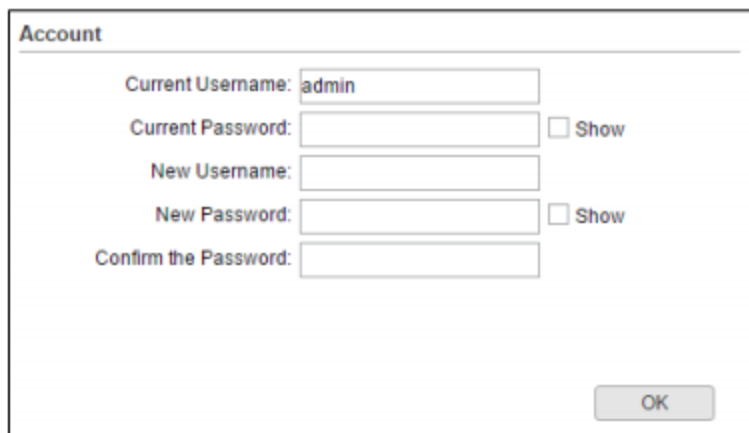

A dialog box titled "Account" with a light gray background and a thin border. It contains five input fields: "Current Username:" with the text "admin", "Current Password:" (empty), "New Username:" (empty), "New Password:" (empty), and "Confirm the Password:" (empty). To the right of the "Current Password:" and "New Password:" fields is a checkbox labeled "Show". At the bottom right of the dialog is an "OK" button.

Example C:

Click **System Tools** > **Account**. Enter the old password. Set a new user name and password. Confirm the new password. Click **Save**.

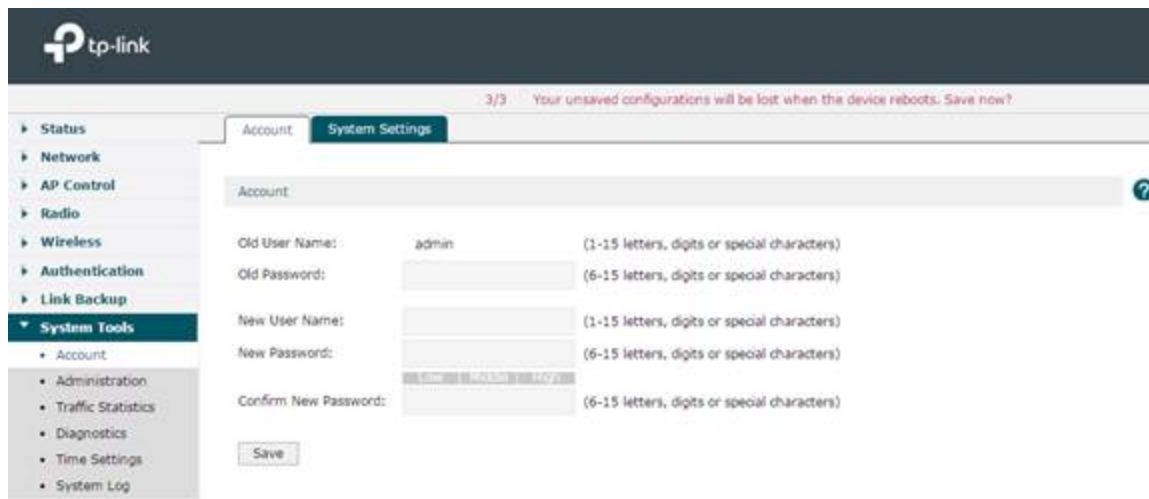

The TP-Link web interface shows the "Account" settings page. The left sidebar has "System Tools" expanded, with "Account" selected. The main content area has tabs for "Account" and "System Settings". Below the tabs, the "Account" section contains five input fields with labels and character requirements: "Old User Name:" (admin, 1-15 letters, digits or special characters), "Old Password:" (empty, 6-15 letters, digits or special characters), "New User Name:" (empty, 1-15 letters, digits or special characters), "New Password:" (empty, 6-15 letters, digits or special characters), and "Confirm New Password:" (empty, 6-15 letters, digits or special characters). A "Save" button is at the bottom left. A red warning message at the top right says "3/3 Your unsaved configurations will be lost when the device reboots. Save now?".

## For Pharos Wireless Broadband

Example A:

Go to **System Tools** > **Password**. Enter the old user name and password. Enter a new user name and password. Confirm the new password. Click **Save**.

[Chat Now](#)

Example B:

Go to **System** page. Under **User Account**, enter the current password. Enter a new user name and password. Click **Apply**.

## For SafeStream Routers

Example A:

Choose menu **System Tools** > **Password**. Enter the old user name and password. Enter a new user name and password. Enter the new password twice to confirm it. Click **Save**.

**Chat Now**

**Password**

---

The username and password must not exceed 14 characters in length and must not include any spaces!

Old User Name:

Old Password:

New User Name:

New Password:

Confirm New Password:

---

Example B:

Choose the menu **Maintenance > Admin Setup > Administrator** to load the following page. Enter the current user name and password. Enter a new user name and password. Enter the new password twice to confirm it. Click **Save**.

**Administrator**

Current User Name:

Current Password:

New User Name:

New Password:

Confirm New Password:

Get to know more details of each function and configuration please go to [Download Center](#) to download the manual of your product.

## Related FAQs

[How do I log into the web-based Utility \(Management Page\) of TP-Link wireless router?](#)

[What can I do if I forget the administrator password of my xDSL modem router?](#)

[What can I do if I forget the login password of TP-Link Wireless Router?](#)

[How to login to the 3G Mobile Wi-Fi Router's web management page](#)

[How to login to the M7350's web management page](#)

**Chat Now**



[How to login to the web management page of TD-W9970 \(new logo\).](#)

## Is this faq useful?

Your feedback helps improve this site.

**Yes**

**No**



## TP-Link Community

Still need help? Search for answers, ask questions, and get help from TP-Link experts and other users around the world.

[Visit the Community >](#)

## Subscribe

Be The First To Get Exclusive Deals & News

Email Address

**Subscribe**

## Let's Connect

### About

[About Us](#)

[Corporate Information](#)

[Contact Us](#)

[Careers at TP-Link](#)

[Privacy Policy](#)

[Do Not Sell My Info](#)

[Accessibility](#)

### Promotions

### Press

[News](#)

[Blog](#)

[Security Advisory](#)

[Awards](#)

### Partners

[Partner Program](#)

[Partner Deal Registration](#)

[MAP Policy](#)

### Learning Center

[Technology Trends](#)

[Training & Certification](#)

**Chat Now**

©2025 TP-Link Systems Inc. and its affiliated companies. All rights reserved.

United States / English

TP-Link, Tapo, Kasa, Omada, VIGI, Aginet, HomeShield, and Tapo Care branded products are products of TP-Link Systems Inc. or its affiliates.

Note: Some services and materials may require you to accept additional terms and conditions before access or use.

References to "TP-Link" may include TP-Link Systems Inc., its subsidiaries, or business units within the TP-Link corporate structure, as applicable.

The materials provided, including but not limited to press releases, presentations, blog posts, and webcasts, are current as of the date of publication and may be superseded by subsequent updates.

**Chat Now**